






Access the inaccessible®

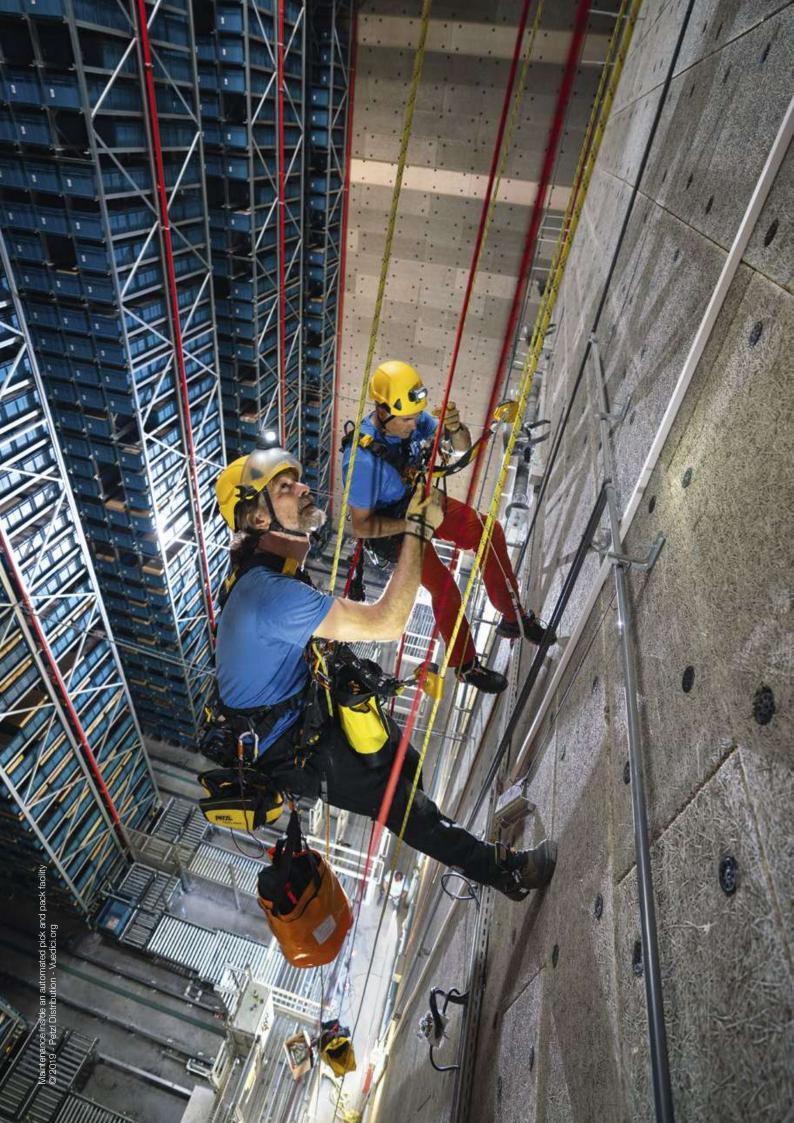

Access the inaccessible®



The need to access the inaccessible is a regular requirement of a good many of the professionals who use our products. And what a promise it is for Petzl to contribute to achieving it. Thanks to our decades of experience, we design and manufacture specialized products that provide our users with the best performance and highest level of safety, so that every move they make in their workday is made easier and more efficient and brings the inaccessible into closer range.

The latest in product news for 2020 is VOLT harnesses, ABSORBICA and PROGRESS lanyards, MAESTRO descenders for technical rescue, and two ropes specifically designed for tree care: FLOW 11.6 mm and CONTROL 12.5 mm. Lighting also delivers with the new SWIFT RL PRO rechargeable headlamp. Very compact, yet providing 900-lumen power and featuring REACTIVE LIGHTING technology, it is bound to be a favorite with professionals working at concerts and shows, in workshops, in maintenance...

Happy reading, and best of success in your endeavors.

The Petzl team

Key new verticality products	2
Key new lighting products	6
Petzl Custom	7

Petzl: a family passion	8
Expertise and dedication to quality	10
Serving our communities	12
The Petzl Foundation	13





VERTICALITY

General principles of work at height	16
Rope access and confined space	18
Tree care	24
Energy and networks	28
Framing and roofing	32
General rescue principles	36
Self-rescue	38
On-site rescue	40
Technical rescue	44
Ski lift evacuation	48
Llawasasas	52
Harnesses	JZ
Helmets	72
Helmets	72
Helmets Lanyards and energy absorbers	72 84
Helmets Lanyards and energy absorbers Mobile fall arresters	72 84 94
Helmets Lanyards and energy absorbers Mobile fall arresters Connectors	72 84 94 100
Helmets Lanyards and energy absorbers Mobile fall arresters Connectors Descenders	72 84 94 100 108
Helmets Lanyards and energy absorbers Mobile fall arresters Connectors Descenders Rope clamps	72 84 94 100 108 118
Helmets Lanyards and energy absorbers Mobile fall arresters Connectors Descenders Rope clamps Pulleys	72 84 94 100 108 118 124
Helmets Lanyards and energy absorbers Mobile fall arresters Connectors Descenders Rope clamps Pulleys Anchors	72 84 94 100 108 118 124 130

LIGHTING

A line for every use	160
The Petzl difference	161
Petzl quality	162
Brightness and burn time	163
Environments and standards	164
Headlamp specifications	167
Performance headlamps	170
Performance headlamps Compact, durable headlamps	170 176
i	
Compact, durable headlamps	176
Compact, durable headlamps	176
Compact, durable headlamps Ultra-compact headlamps	176











Harnesses

New VOLT and VOLT WIND fall-arrest and work positioning harnesses, for work on pylons, antennas or wind turbine towers.



VOLT European version international version


page 57




/OLT WIND European version nternational versio

Lanyards

New line of ABSORBICA fall arrest lanyards with integrated energy absorber Available in several versions: single, single adjustable, double, and double with MGO connector.

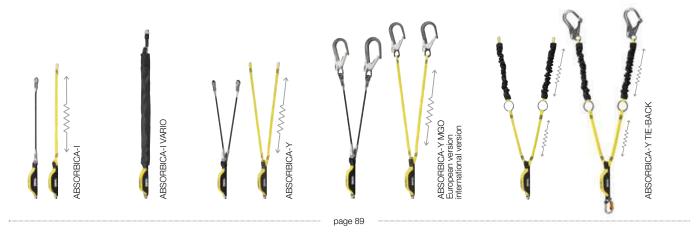

New PROGRESS ADJUST lanyards can now be used for progression and positioning in rope access situations, or as lightweight quick-adjustment anchors, thanks to the variety of lengths available.

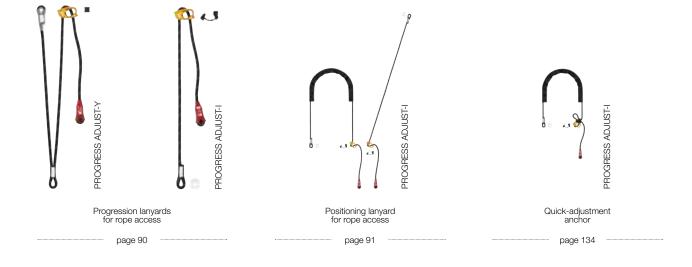

Key new verticality products

Mobile fall arresters

New complete solutions for fall protection with the ASAP mobile fall arrester, ASAP'SORBER and ASAP'SORBER AXESS energy absorbers and the new ASAP'AXIS 11 mm low-stretch kernmantel rope with sewn termination and integrated energy dissipater.







Connectors

New VULCAN high-strength asymmetrical carabiner with large capacity, and CAPTIVO, CAPTIV ADJUST and STUART connector-positioning accessories. New MGO OPEN 110 directional connector with large gate opening and a gated connection point.



page 104



page 106

CAPTIV ADJUST



ASAP'AXIS 11 mm

page 105

MAESTRO S

Descenders


New MAESTRO descenders for technical rescue with integrated progress-capture pulley and AUTO-LOCK system, to facilitate lowering and hauling of heavy loads. Available in S or L version.

page 113

page 113





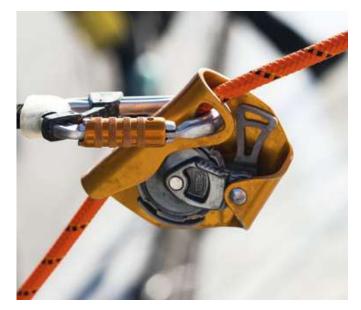






Anchors

New CONNEXION anchor straps, available in fixed (CONNEXION FIXE) or adjustable (CONNEXION VARIO) version, equipped with two forged steel attachment points.



Ropes

New FLOW 11.6 mm and CONTROL 12.5 mm low-stretch kernmantel arborist ropes with splice provide optimal performance when used with ZIGZAG and ZIGZAG PLUS mechanical Prusiks.



page 139

page 134



Key new lighting products

Ultra-compact headlamps

New SWIFT RL PRO ultra-powerful (900 lumens), lightweight rechargeable headlamp with multi-beam and REACTIVE LIGHTING technology, for proximity and distance vision. White lighting, or red to ensure nighttime stealth.

New TACTIKKA ADAPT headlamp without headband and with mounts for use on any type of helmet. 300 lumens.



SWIFT RL PF







page 187 -----

page 184





Personalized products and ready-made solutions

Thanks to the Petzl Custom service, you can personalize certain Petzl products. It is possible to manufacture and assemble ready-made products to meet specific user needs, or to identify a product with a company's colors or logo, for example. To take advantage of Petzl Custom service, simply contact your regular Petzl dealer and place your order. Petzl Custom service will personalize helmets, work positioning lanyards, personal escape systems and certain low stretch kernmantel ropes and technical cords.

VERTEX and STRATO helmets

Petzl Custom service can:

- personalize the helmet with a logo and reflective stickers
- pre-mount Petzl eye and face shields and accessories of your choice onto the helmet, for a ready-made solution, with each helmet delivered in an individual transport pouch.







GRILLON work positioning lanyards

Petzl Custom service allows you to choose:

- type of lanyard: standard or high-strength rope
- lanyard color
- · lanyard length
- type of lanyard-end connectors and harness connector

The assembly of various components of your choice offers a ready-made solution specific to the user.

EXO AP HOOK personal escape system

Petzl Custom service allows you to choose:

- type of rope: standard or high-strength rope
- rope color
- · rope length
- type of rope-end connectors and harness connector

The assembly of various components of your choice offers a ready-made solution specific to the user, delivered in a transport pouch or bag adapted to the length of the rope.

AXIS 11 mm, PARALLEL 10.5 mm, VECTOR 12.5 mm low stretch kernmantel ropes and the SEGMENT 8 mm technical cord

Petzl Custom service allows you to choose:

- rope color
- · rope length
- type of termination (sewn or not, only on low stretch kernmantel ropes)




Access the inaccessible®

Petzl's mission is to create innovative tools and services that allow people to progress, position, and protect themselves in vertical environments, as well as to light their way in the dark. We continually look for the best solutions for user needs in terms of performance, ergonomics, comfort, and reliability. The demands and the commitment of users are what guide our approach to supporting them in their pursuit of the inaccessible. We have stood by their side for over 40 years.

Paul Petzl

Petzl: a name, its values

The Petzl brand on a product has always represented the commitment of the Petzl family to produce the best tools for its users. The adventure began with Fernand Petzl's passion for caving, a passion to which he dedicated his talents as a craftsman. Petzl expertise began to grow with the design and crafting of solutions for ascending, descending, belaying and moving about in the dark. In 1970, the first "Fernand Petzl" brand products were produced in a workshop in Saint-Nazaire-Les Eymes, Isère, France. The Petzl company was created in 1975 and has grown into an international company that now employs over 800 people. Since its beginnings, it has preserved its family legacy and values: remaining independent and in control of its own decisions, developing a long-term vision, prioritizing people above all, and embracing its commitment to quality. Today, a family council, with Paul Petzl as president, ensures the continuity of the company.









(1) 2017: Paul Petzl and family (2) 1940: Fernand Petzl in the Dent de Crolles, France (3) 1970: Fernand Petzl in his workshop

(4) The Petzl product signature






Apioneering business

To attain the inaccessible, you need to know how to reinvent yourself. Since the development of the first rope ascenders and descenders, which laid the foundation for rope progression, Petzl has been at the forefront of change and the emergence of new techniques. Headlamp lighting, belaying, rescue, ice climbing, glacier travel... In these and other fields, Petzl's innovations have allowed equipment to evolve and practices to be reinvented. As proof of this dynamic activity, over 700 patents have been registered since 1970.

These advances always result from a dialogue with the user, in order to understand his/her expectations and to provide the elements s/he needs. Petzl has always remained true to this method.

Petzl's philosophy for design and production is also based on accelerating change, transforming, and innovating in order to provide sports enthusiasts and professionals with the quality products they demand. Testing tower, experimentation center, individual inspections, LEAN manufacturing process

- Petzl was a pioneer in all of these innovations.

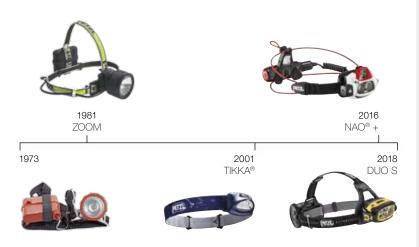

1936: Fernand Petzl starts exploring the Dent de Crolles, France, and invents the tools he needs

1968: Our first rope ascenders and descenders (BASIC, SIMPLE) under the name Produits Fernand Petzl (Fernand Petzl Products)

1973: First Petzl mountaineering headlamp is developed

1983: First Petzl harnesses

1991: GRIGRI®, first belay device with assisted braking

1998: TIBLOC®, ultra-compact rope ascender

2001: TIKKA®, the first LED headlamp

2004: ASAP® mobile fall arrester

2005: Petzl professional helmets

2006: EXO® personal escape system for New York City firefighters

2012: NAO® headlamp with REACTIVE LIGHTING technology

2013: SIROCCO helmet and ZIGZAG® mechanical Prusik for tree care

2015: SITTA harness for climbing and technical mountaineering

2017: GRIGRI® + belay device

2018: New DUO headlamps with FACE2FACE anti-glare technology

Education, communication

From the beginning, we have sought to provide technical answers to our users' needs. The answers come in the form of product design, but also in the sharing of our experience with verticality. This experience can be found in the technical notices for products, and in the technical advice in our catalogs and at Petzl.com

The Petzl Solutions department is dedicated to education, through the sharing of our technical expertise. Petzl Solutions provides technical education modules and makes them available through a network of Petzl Technical Institutes around the world.

In order to share our values, we collaborate with top athletes in different disciplines. Mountaineers, climbers, trail runners, cavers... they are the ambassadors of our company and of the passion for the inaccessible. Many are involved with the fine-tuning of our products. See them at Petzl events and through their stories on Petzl.com and on our social media platforms.



For over 40 years, Petzl has built on its expertise in the design and manufacture of products for verticality and lighting. Today, Petzl designs, produces and distributes millions of products around the world. Building a Petzl product requires expertise in a wide range of materials - textiles, metals, plastics - as well as in specific technologies: plastics processing, sewing, injection molding, forging, LEDs, electronics... This expertise allows us to design equipment that meets both the needs of users and the technical requirements for its use: resistance to impacts, abrasion, extreme temperatures...




The Petzl research department in Crolles, France, integrates all the fields related to product design: mechanical, textile, electronic, optical, computing and prototyping. Starting at the design and prototype phases, the reliability of the product and user safety are continually evaluated, with a strong focus on risks to the user.










© Pascal Tournaire



In Crolles, Petzl has labs dedicated to testing verticality products and headlamps. These tests often go above and beyond the required standards to help validate product reliability and user safety. Examples of tests: dynamic fall tests, impact resistance, cyclic testing, performance, headlamp beam quality and burn times. They are complemented by testing in the field for ergonomics and reliability.









Production and inspection

Petzl's production sites are based in Crolles, Eybens, and Rotherens, France, and in Rawang, Malaysia.


This production infrastructure is complemented by long-term partnerships with key suppliers in Europe and Asia. Our purchasing and quality control teams work closely with suppliers to guarantee a standard of product reliability and quality that meets our strict requirements. During the manufacturing phase, quality control is present at every step of the production chain. It combines automated and human inspections.
















(3) Automated production systems

(4) Textile preparation



Petzl distributes products to more than fifty countries via a distribution network, subsidiaries and agents around the world.



Petzl distributors









Providing solutions for users

Petzl serves communities of users committed to their activities. Our goals: to assist them with products they can rely on, and to offer them our expertise. Petzl is active in the following fields:

- outdoor activities: climbing, mountaineering, ski touring, trail running, via ferrata, canyoning...
- work at height: rope access, tree care, energy and networks, framing and roofing...
- rescue: technical rescue, self-rescue, evacuation on mechanical lifts
- personal lighting for professionals, for maintenance, for industrial worksites
- equipment for tactical operations units
- equipment for adventure parks











- (1) Fabian Buhl and Alex Huber in Seebenseefall direct Wi6+, Austria
- (2) Trail running in Monserrat with Nuria Picas and Clare Gallager
- (3) Technical rescue maneuvers by GRIMP in Florac, France
 (4) Tactical special forces
- (5) Eucalyptus care by Cerre Arboricultura, Praia de Arneles, Galicia, Spain



Exploring new horizons



Climbing towards a summit or progressing in the vertical world gives rise to lasting passions that help women and men grow, thrive and dream. For over 10 years, the Petzl Foundation's mission has been to support or initiate public interest projects through its activities in the mountain and vertical spheres, projects that help bring balance to humankind's place in its natural, cultural, and economic environments.

The Petzl Foundation:

- encouraging learning and risk management to avoid accidents
- promoting the preservation of hard-to-access ecosystems
- contributing to a better understanding of current practices and their environments

Technical booklets for rope access workers

The Petzl Foundation is involved in improving the safety of rope access work. In 2018, it contributed to the creation of two technical information booklets.




Rescue guide specifically for rope access work

Produced by the technical rescue commission of the DPMC (Development and Promotion of the Rope Technician), this guide aims to improve the handling of injured rope access workers. The document issues a strong reminder about the dangers of ventral suspension without thoracic support (victim is horizontal, legs hanging). The authors use images to illustrate how to stabilize the victim in the upright safety position in order to evacuate under optimal conditions. The upright safety position improves the comfort of the victim and prevents rapid deterioration of his/her condition.

This guide is available for free download at www.cqpcordiste.fr

Two drawings published in the rescue guide specifically for rope access work, by the DPMC with support from the Petzl Foundation.



Victim in horizontal suspension on ventral attachment point




Upright safety position with cervical collar



Reference guide on setting a double anchor for rope access work

This technical guide for arborists presents the procedures to adopt when moving around and positioning themselves in the crown or trunk of the tree, with techniques adapted to the realities of the terrain. It is produced by Copalme, founded by three instructors specialized in ornamental horticulture, in order to develop, improve and promote best practices for professionals.

This guide is distributed without charge by local branches of the Mutualité Sociale Agricole. It is also available for downloading at www.copalme.org

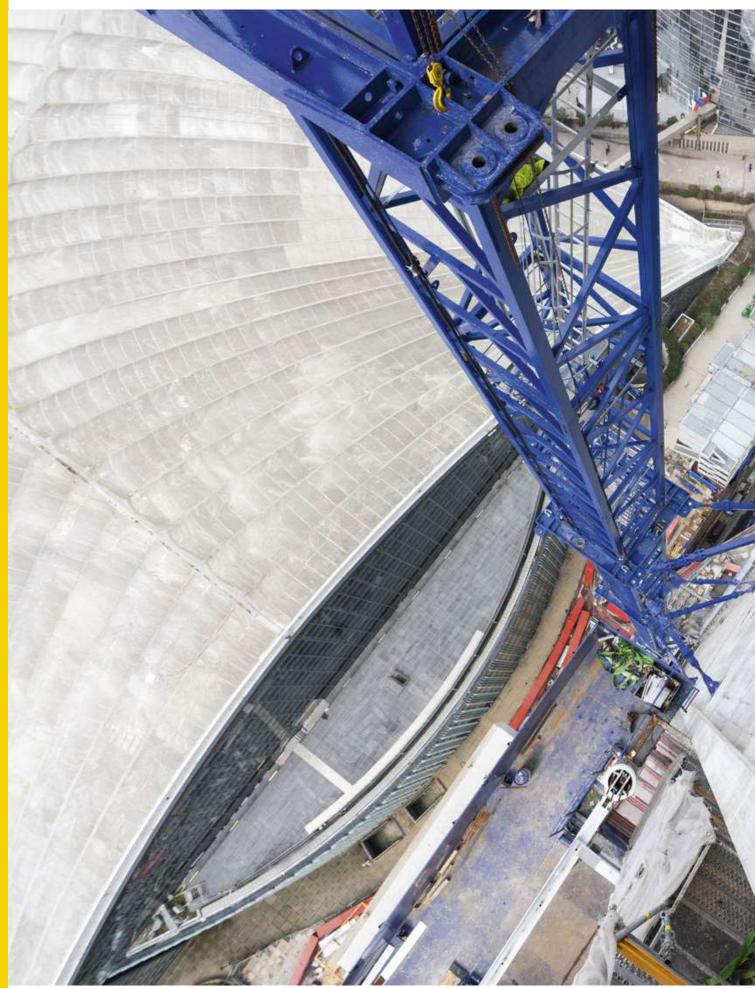

Repositioning the braces of a tower crane, France © 2019 - Petzl Distribution - Vuedici.org - Integral - Bateg - Tour Trinity - Cro&Co Architecture





Petzl's expertise in vertical terrain is expressed by its line of products specifically designed for work at height and rescue professionals. These products address all of the issues faced by professionals every day: repeated and intensive use of equipment, weather, diverse terrain... They maximize usability, simplicity and ease of use, while meeting the highest quality standard.



Equipment inspection and individual identification code

To ensure that your equipment is in good condition throughout its useful lifetime, it is necessary to inspect it regularly. Depending on the product's date of manufacture, the individual identification code can be structured in two ways, with 11 or 13 characters.

For more information, please see www.petzl.com



Special products in black

Certain products are also available in black; they are designed for professions for whom stealth is essential.

Warning

- You must have understood and retained the information from your products' Instructions for Use to be able to apply the techniques presented in this document
- Learning appropriate techniques and methods of protection is your own responsibility. Petzl solutions are given for information only, with no guarantee of their effectiveness in your specific working situation. The relevance of these solutions varies by context, so always do your own risk analysis in the field
- · Mastering the techniques presented here requires specific training and practice; consult a specialized organization for all training activities

General information on falls

The risk of falling is a key concept to master when working at height. The severity of a fall depends on independent factors:

• The weight of the user, including equipment:

The greater the weight, the more energy to be dissipated during the fall.

• The length of the fall:

The longer the fall, the more energy to be dissipated during the fall. The risk of hitting an obstacle is also greater.


• The position relative to the anchor:

When the worker moves above his/her anchor, the severity of the potential fall increases. The fall factor concept is sometimes used to describe the worker's position relative to the anchor and the severity of the fall. This concept applies to climbing, restraint, or work positioning situations, when a dynamic rope lanyard is used.

Precautions for the type of system used: the Instructions for Use specify the limitations for use of equipment, particularly in terms of fall distance and the worker's position relative to the anchor.

Restraint

A restraint system limits the work zone, keeping the worker from entering an area that may present a risk of falling. This system is not designed to arrest a fall from height.





Fall arrest

The fall arrest system is a belay system that is independent of the means of progression or work positioning.

The fall arrest system prevents the user from falling to the ground in case of a fall. Its role is to arrest the fall while limiting the impact force experienced by the user. It must therefore be used with enough clearance to allow for a free fall.









Work positioning

A work positioning system supports the user and allows him/her to be precisely positioned with weight on his/her feet. This system is not designed to arrest a fall; the user must keep his/her body weight on the positioning system.

The work positioning system must be supplemented with a fall arrest system.





Suspension

The user is working in suspension when s/he no longer has weight on his/her feet, but is supported primarily by the harness. The load is thus shared between the waistbelt and the leg loops/seat.



Impact force


A fall arrest system allows the impact force experienced by the user to be limited.

It is typically composed of an energy absorber that tears in order to limit the forces over a specific stopping distance.


A dynamic rope lanyard has a low capacity for energy absorption. Its use requires great precautions: reducing the potential fall distance and staying in a work position below the anchor.

A webbing lanyard or a cable, with no capacity for energy absorption, can not be used to arrest a fall. Example for 100 kg

JANE or PROGRESS lanyard without energy absorber



Lanyard with ABSORBICA-I or Y energy absorber



Fc < 6 kN

Clearance

Clearance is the minimum amount of clear space below the user that prevents the user from hitting an obstacle in case of a fall.

Clearance takes into account:

- the user's weight
- the length of the fall
- the tearing length of the energy absorber
- the average height of the user
- a safety margin of 1 meter

Clearance value

The tearing length of the energy absorber, depending on the fall, can only be known based on the manufacturer's information; this is why a clearance estimate is suggested in the Instructions for Use for each fall arrest device.





Anticipating the means of rapid evacuation

• Limiting the effects of inert suspension:


In case of a fall where the worker loses consciousness or is incapacitated, inert suspension in the harness presents a mortal danger requiring an urgent response. Work teams must be equipped and trained to quickly evacuate an injured team member.

· Evacuating a victim without assistance:

Procedures for evacuating workers should be determined whenever a new worksite is established.

Releasable systems can be created during installation of working ropes to allow evacuation from below.

Working alone must be prohibited: a worker may find him/herself alone at height, but at least one person trained in evacuations should be present and equipped on site.




Rope access work situations often involve environments at significant height. They can be inside or outside, even confined, and are not suited for the use of collective protection. Work done in confined spaces carries additional difficulties related to the lack of space, and to the lack of means of autonomous progression.

Examples of operations:

- placement of rockfall or stabilization nets over a road
- structural inspection (bridge pilings...)
- exterior window cleaning on skyscrapers
- inspection of tanks

Technical specifics:

- the work area is accessed with ropes by specialized workers trained in rope access techniques
- access from above is preferred, as it is safer and simpler to set up

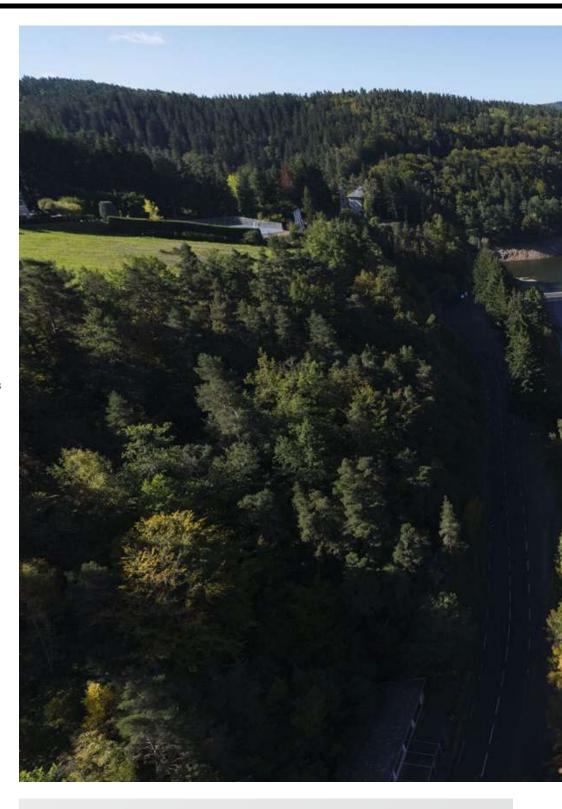



PROGRESS ADJUST-Y

PROGRESS ADJUST-Y is a double adjustable progression lanyard that enables continuous connection for all types of progression (rope ascent, moving along a traverse line...). Thanks to the ADJUST rope adjuster, the length of the adjustable arm can be quickly and easily adjusted. The TANGA accessory and the plastic sheath help hold the connectors in a good position for easy clipping.












Structural inspections on the Vladuc de Gabarit, France © 2019 - Petzl Distribution - Vuedici.org - Lafouche - Sncf réseau - Vladuc de Garabit


Installing ropes

Load-sharing anchors with the rope.


Bunny knot (for load-sharing anchors).



Special case: isolate a section of damaged rope with a butterfly knot.



















PROTEC

Releasable anchor.

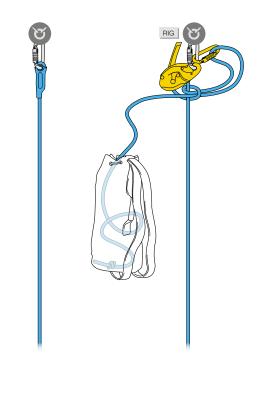


Load-sharing anchors with a sling: effect of the angle on a load-sharing anchor.









Installing a lifeline with the ASAP mobile fall arrester.

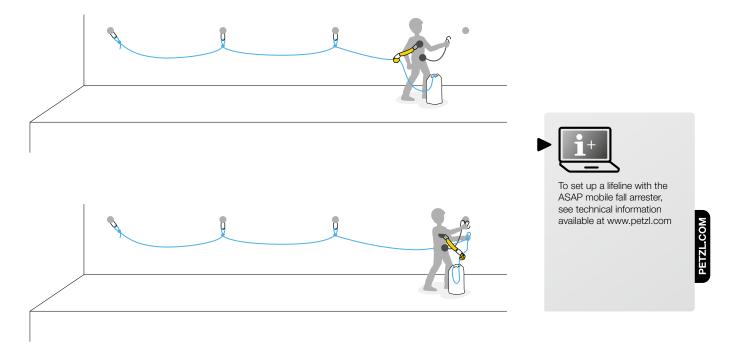

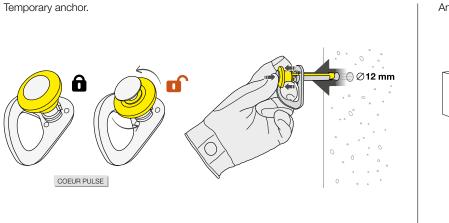




Choice of anchor material based on the environment.

COEUR BOLT	STEEL	STAINLESS	HCR
Inside or temporary use	***	*	*
Outside	\triangle	***	*
Ultra-corrosive environment			***

Gated ventral attachment point on ASTRO harnesses



The ventral attachment point on ASTRO harnesses is gated for optimal integration of equipment.


Lowering

The RIG descender attaches to the large metal D.

The PODIUM seat connects to the pin with shackles, allowing a direct connection to the descender while preserving ventral attachment point mobility.

Ascent


The CROLL ventral rope clamp connects to the small metal D for greater efficiency on rope ascents.

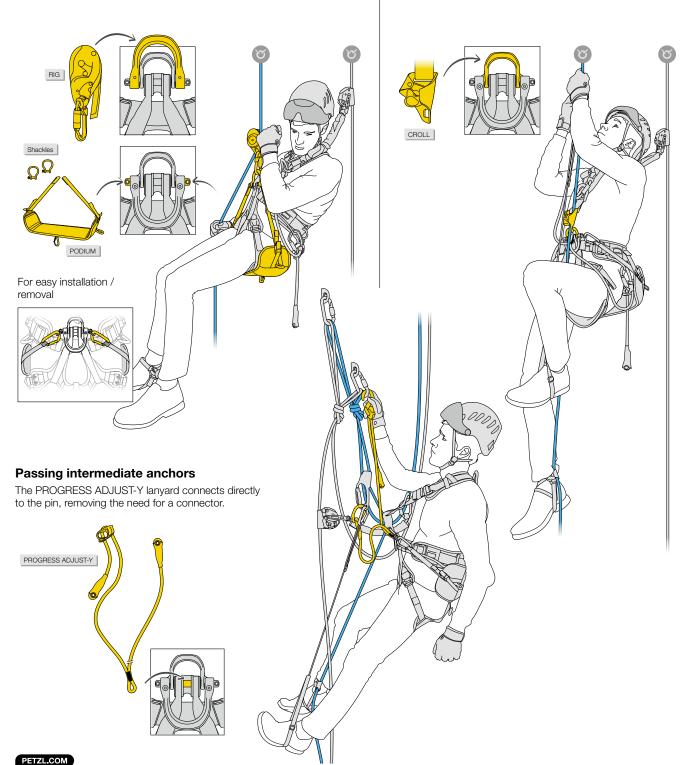



1. Combined lowering/raising system


- Advantage: quick transitions between modes (lowering/raising)
- Disadvantage: rope length is four times the travel distance

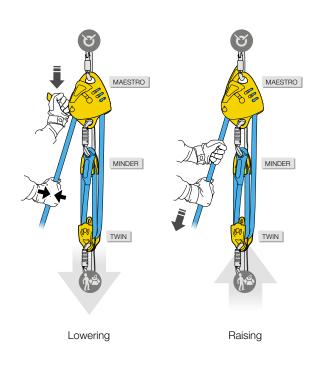


2. Independent lowering/raising systems

• Advantage: the length of the rope equals the travel distance

• Disadvantage: rigging is required to transition between lowering and raising












Not all tree work can be done using exterior means such as elevated platforms or ladders. In this case, to move and work, the arborist uses rope progression techniques.

Examples of operations:

- ornamental tree trimming, to adapt the tree to its environment or to change its overall aesthetic
- maintenance trimming to remove dead wood and dying branches
- tree removal (progressive cutting of the trunk from the top) if diseased or presenting a hazard...

Technical specifics:

- access from the base of the tree generally starts by throwing a weighted bag with line attached. This line is used to install the access rope on an anchor up in the tree
- while moving about on the branches, the arborist keeps his/ her weight on the work rope, for greater stability and to reduce potential fall distance
- when using any cutting tool (handsaw, chainsaw), the arborist must use two independent belay systems

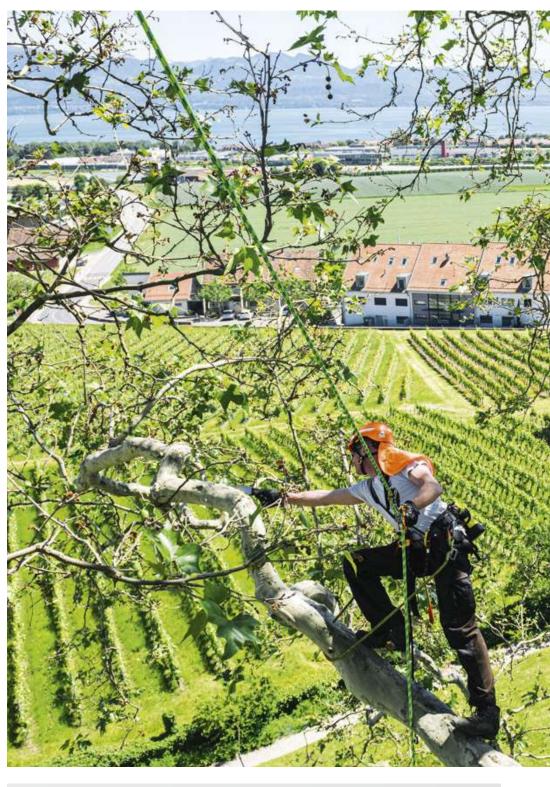



FLOW 11.6 mm and CONTROL 12.5 mm

The FLOW 11.6 mm and CONTROL 12.5 mm low stretch kernmantel ropes are designed for tree care. Their diameters ensure strength, solid grip and very good performance.

The EverFlex technology ensures great flexibility and handling over time. They come with a splice at one end for optimal rope glide through devices like a friction saver or pulley, and through tree branches. The small size of the splice allows it to pass through the friction chain of the ZIGZAG and ZIGZAG PLUS mechanical Prusiks. They are available in two colors and three lengths.










Tree care operations, Lausanne, Switzerland © 2019 - Petzl Distribution - Marc Daviet - Freelance Concept


Tree access



Doubled rope ascent technique

The arborist ascends the access rope (purple).


In case of a problem like a hornet attack, s/he can self-evacuate with the work rope (blue). A mule knot or releasable knot secures the ZIGZAG. This versatile ascent technique is adaptable to many situations and allows an access rope to be available during work.



Single rope ascent technique


The access rope is attached to the base of the tree and runs through an appropriate anchor in the tree. It will also be used for work. On a single rope, the ZIGZAG must only be used with the CHICANE.

This technique allows for rapid rescue and efficient climbing with the KNEE ASCENT knee ascender.

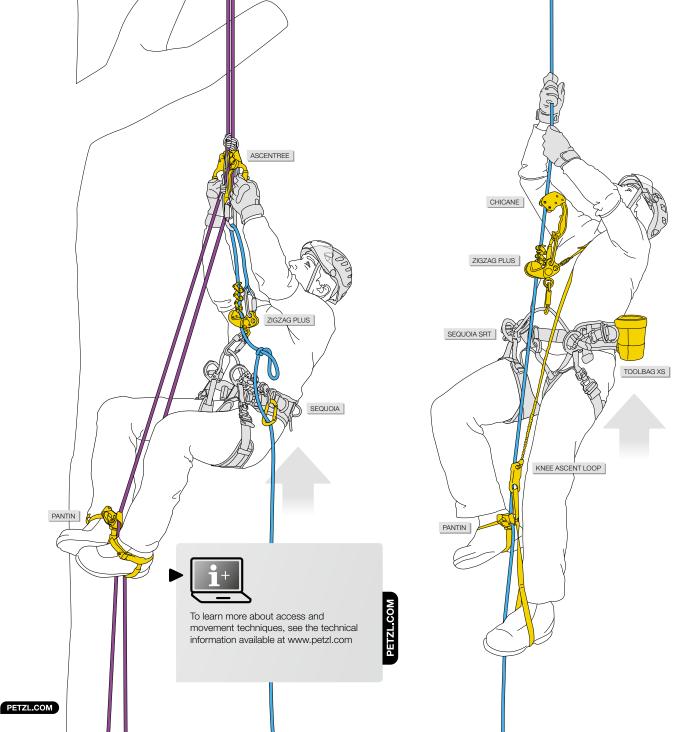




Movement within the tree



Movement on doubled rope

The work rope is set up doubled through a friction saver, on a suitable anchor near the top of the tree.


This technique allows for easy travel in any direction and provides the arborist with good support when limb walking.



Movement on single rope

The rope setup does not change between access and work: if the top anchor is reliable and verified, the arborist does not necessarily need to climb to the top and can go directly to the workstation.

The rope does not run during movement; the arborist can thus move anywhere in the tree with no loss of efficiency.

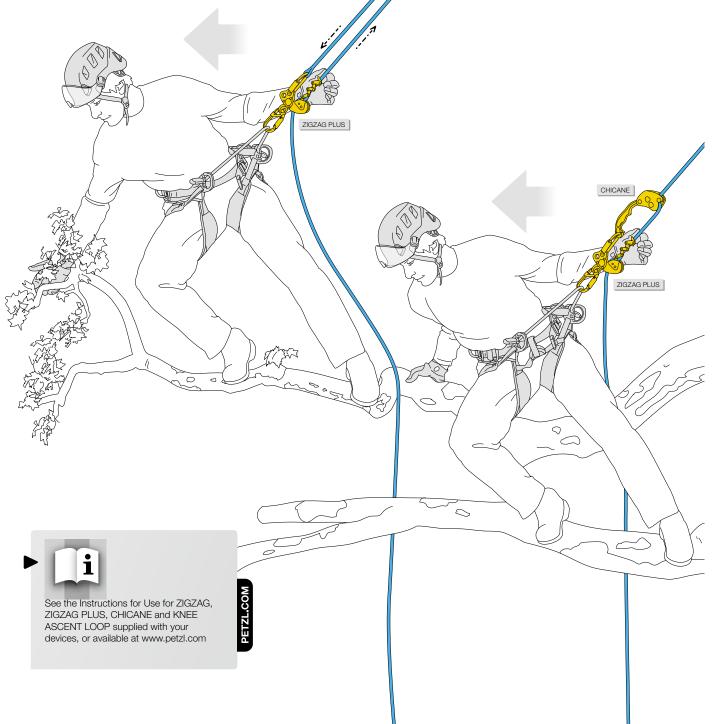

These fields are characterized by structures such as towers, antennas and windmills. The modes of progression are varied, and directly related to the structure itself.

Examples of operations:

- work on high tension lines
- tower construction
- maintenance operations in wind farms...

Technical specifics:

- the user generally progresses using lifeline, cable or rail type permanent fall arrest systems
- lacking these, the user must ensure his/her own safety using personal protective equipment: energy-absorbing lanyard or mobile fall arrester on rope





VOLT® WIND and ABSORBICA-Y MGO 150

VOLT WIND dons with both feet on the ground, thanks to its automatic buckles. Wide, semi-rigid waistbelt and leg loops give excellent support. The LADDER CLIMB attachment point allows ventral attachment of the fall-arrest trolley. The wear protectors on the waistbelt and dorsal point limit wear when moving about inside the wind turbine tower. ABSORBICA-Y MGO 150 is a double lanyard with compact energy absorber, designed for progression on a vertical structure or a lifeline, and when passing intermediate anchors. The arms are elasticized to avoid hindering progression. It is equipped with two MGO large-opening connectors.










Maintenance operations of wind turbines, France © 2019 - Petzl Distribution - Vuedici.org - RES - Parc éolien de Marsanne

Backed-up ascent using a double lanyard with integrated energy absorber

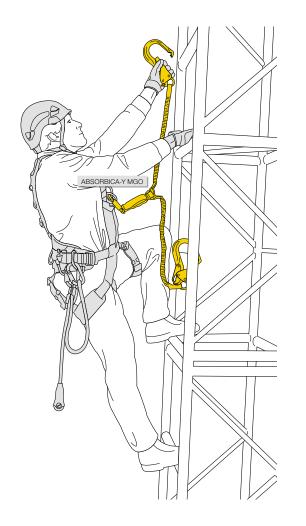



Ascent protected by a fall arrest trolley attached to a rail

The trolley is fixed to the harness's ventral fall arrest attachment point (LADDER CLIMB), distributing the load on the waistbelt and ensuring optimal comfort during progression. In case of a fall, this attachment point moves upward to a sternal position to ensure a vertical post-fall body position.



Work positioning with GRILLON lanyard in double mode use



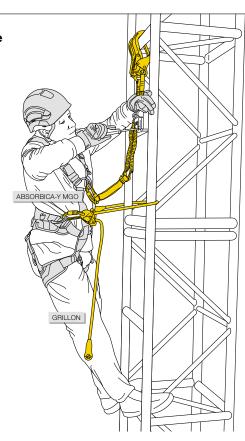






Descending on a GRILLON 20 m lanyard

The GRILLON lanyard is attached to the ventral attachment point of the VOLT harness.

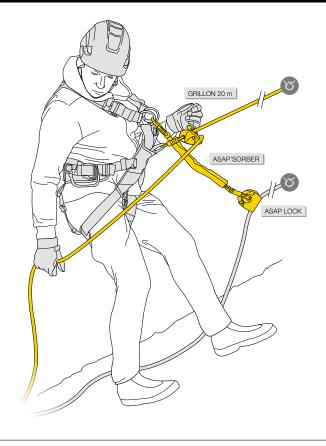

ABSORBICA lanyards and users over 100 kg

In order to remain within the energy absorbing capacity of ABSORBICA lanyards, a user weighing over 100 kg (with equipment) must reduce the height of a potential fall.

The easiest solution to limit the height of a fall is to use a shorter lanyard.

Recommended lanyard length (including connector), based on user weight:

Maximum user weight	Maximum lanyard length to use	Maximum fall height	Examples of adapted lanyards
50 - 100 kg	2 m	4 m	Am'D MICRO ABSORBICA RING JANE 150 cm Am'D SWIVEL
120 kg	1.9 m	3.8 m	Am'D MICRO ABSORBICA-I or SWIVEL ABSORBICA-Y 150 MGO OPEN 60 x2
130 kg	1.8 m	3.6 m	ABSORBICA-Y 150 international version
140 kg	1.6 m	3.2 m	Am'D MICRO ABSORBICA RING JANE 100 cm Am'D SWIVEL

In this type of work situation, the risk of slipping and falling is higher. A safety device must be installed to guard against these hazards.

Examples of operations:

- framing a building under construction
- roof repair or waterproofing
- roof inspection on industrial sites...

Technical specifics:

- when the situation allows, accessing the work area is done using an elevated work platform. The worker secures him/herself with an energy-absorbing lanyard
- lacking collective protection, the worker is required to use a fall arrest system
- fall arrest systems are also required when installing collective protection





VERTEX® HI-VIZ

The VERTEX HI-VIZ helmet is very comfortable, thanks to its six-point textile suspension and CENTERFIT and FLIP&FIT systems, which ensure that the helmet fits securely on the head. This high visibility version features a fluorescent outer shell with phosphorescent clips and reflective bands, for optimal visibility of the worker, day or night. It can be equipped with any of the many accessories that adapt to the user's needs: eye or face shield, nametag holder, nape protector, helmet protector...











Rooftop cleaning of the university library in Luxembourg @ 2019 - Petzl Distribution - Vuedici.org - Voltige - Fonds Belval-Valentiny Hvp Architects


1. Roof access

Installing a rope with releasable anchor; backed up ascent with the ASAP.










2. Long-term use

With individual positioning system and collective protection.

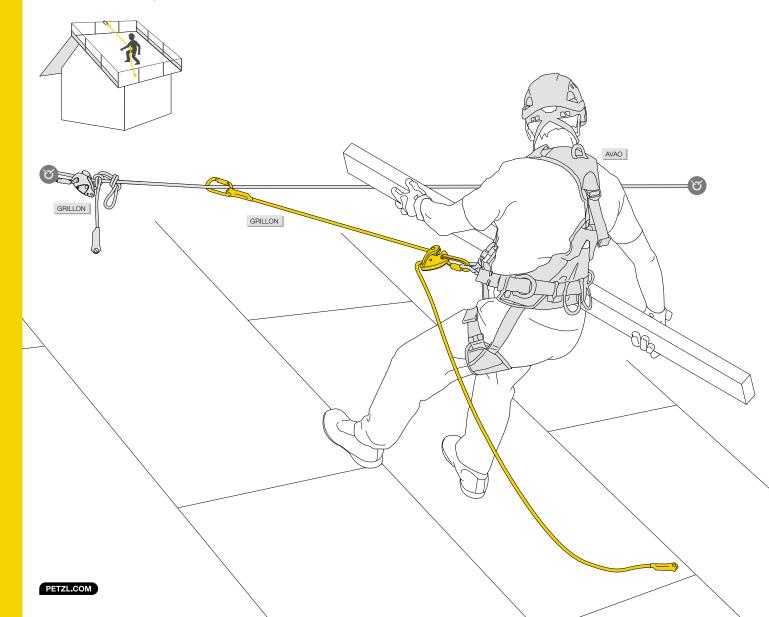




3. Occasional use

With individual fall arrest system.


• Working in the center of the roof (limited access zone)




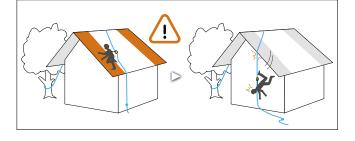

• Working at the edges




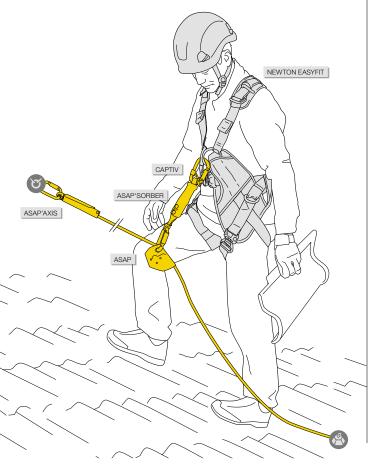

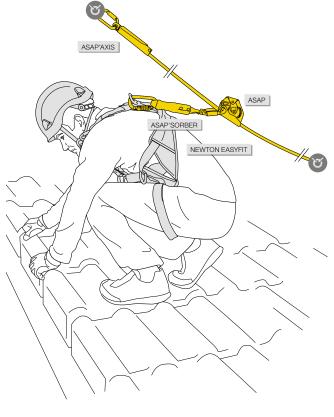



To learn more about using the ASAP on an incline, see technical information available at www.petzl.com

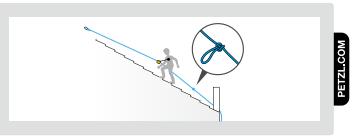

General rescue principles

Inert suspension in a harness, even for a short time, can cause serious physiological harm. In case of an accident, it is important to respond quickly with the appropriate technique.

Self-rescue

On sites where the main access could be cut off by fire, people must be ready to quickly evacuate the building. They have evacuation kits. These kits are either portable or installed permanently on the structure. Where there is no identified anchor possibility, a hook-based system can be used. In both cases, teams must be regularly trained so as not to panic in case of a fire.

On-site rescue

When a worksite is being set up, the company must establish a risk prevention plan (inventory of risk situations):

- 1. It must protect the personnel from falls from height. The solutions chosen, whether collective or individual, must protect the team members while they work.
- 2. In case of an incident, the company must be prepared with rescue systems for accessing, releasing and evacuating the victim. These solutions are established with:
- ready-to-use rescue kits, adaptable to many situations and simple to use
- personal equipment for the worker at height (solution requiring experienced and well-trained teams)

In both cases, the teams undergo regular training so they can respond quickly in case of an accident.


Technical rescue

Technical rescue teams must be able to respond quickly in any situation. They must choose the quickest, most effective way to access the victim.

- When access is easy or possible by motorized means, they can easily transport the rescue equipment
- In more difficult access situations, they may use rope access techniques, from above or below. They thus have lightweight, versatile equipment
- Finally, the helicopter can be a means that is used when victim access is complicated and/or remote, for example in the mountains

Ski lift evacuation


Ski lift evacuation operations follow an evacuation plan. Rescue kits are put together to meet the specific needs of each ski center.



1. Accessing the victim


Accessing the victim can sometimes be complicated. Rope access techniques are used in such a case. When access is possible from above, rescuers use rope descent techniques. If an access rope is in place, rescuers can ascend the rope using handled & ventral rope clamp techniques. In other situations, rescuers are obliged to use climbing techniques to reach the victim.

Example of access from above



Example of access from below



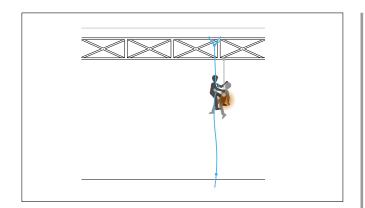


2. Releasing the victim

Raising


This involves using a mechanical advantage pulley system in order to easily raise the victim. A rescuer working alone uses a mechanical advantage system to reduce effort. The disadvantage is that a long rope is required. If there are enough rescuers, a lower mechanical advantage is used to speed up the operation.


Counterbalance technique

This is a counterweight system. The rescuer is on one side, the victim on the other. The rescuer unweights the rope on the victim's side by pulling upward. The victim ascends and the rescuer descends. The advantage of this system is that it is easy to do with little equipment. Engaging the counterweight is the step that demands the most energy. After that, it is important to be careful to keep the system under control. Beware when there is a significant weight difference between the rescuer and the victim.




Example of counterbalance






3. Evacuating the victim

Downward, the evacuation is done with a descender. This is the easiest technique currently in use. When downward evacuation is impossible, the victim is evacuated upward or horizontally. Upward, rescuers use either a counterweight or hauling technique. Horizontally, one or more ropes are tensioned. One rope is used for carriage, another is used as a back-up belay, and another to move the litter.

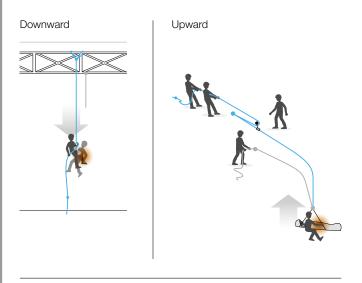



The typical scenario is of a firefighter trapped inside a burning structure. S/he needs to be able to ensure his/her own rescue and thus must have the appropriate equipment.

Technical specifics:

- in this situation, the firefighter must be able to take advantage of any available anchor point inside the building, or as a last resort, a window sill
- the exit generally takes place in an extremely hot, smoke-filled, and hostile environment, adding to the limitations
- the maneuvers must be as simple as possible, for quick action even under intense duress






EXO AP HOOK


EXO AP HOOK is a personal escape system with anchor hook adapted for locations where the possibility of finding an anchor point is uncertain. It has a self-braking system with anti-panic function for quickly moving horizontally, climbing through a window and controlling and stopping a descent. If the user pulls too hard on the handle, the anti-panic function brakes and stops the descent automatically.







Going through a window while maintaining the anchor hook on the window sill. Locking the left leg against the interior wall to control the movement. Re-establishment below the window while holding the free end of the rope. Descending, one hand uses the handle to start the descent, and the other hand holds the rope to control it.

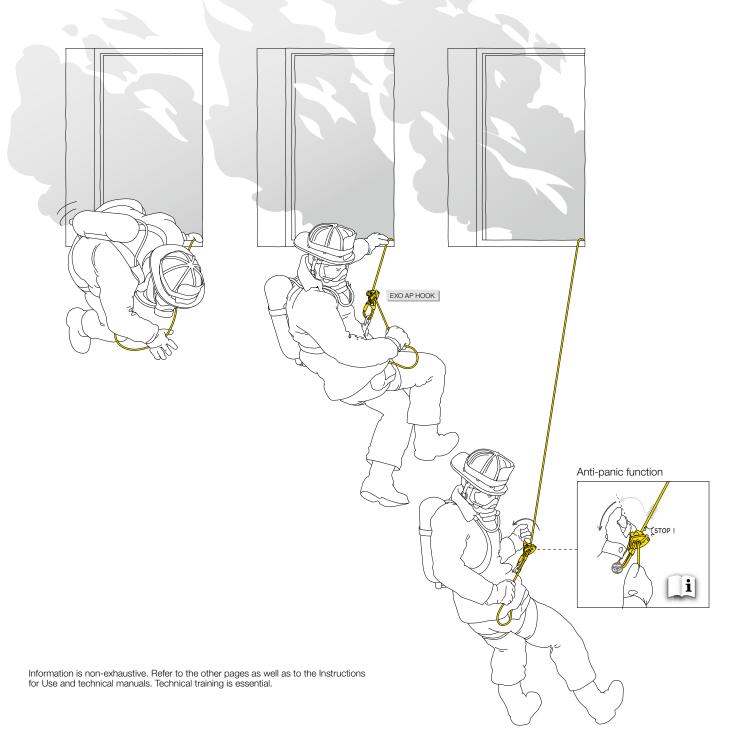


If a victim is not able to self-rescue, the on-site work team has to respond immediately and move him/her to safety.


Examples of operations:

- a team member accesses the victim, unhooks him/her, then lowers the victim unaccompanied
- a team member accesses the victim, releases him/her, then rappels down with the victim
- the victim is suspended on a pre-installed evacuation system that does not require a team member to access him/her directly

Technical specifics:

- unaccompanied evacuation can generally be done using a ready-to-use rescue kit
- accompanied descent requires proper training, as it implies a mastery of advanced rope access techniques
- in all cases, the rescue method should be as rapid as possible, in order to reduce the risk of suspension trauma, especially when the victim is unconscious

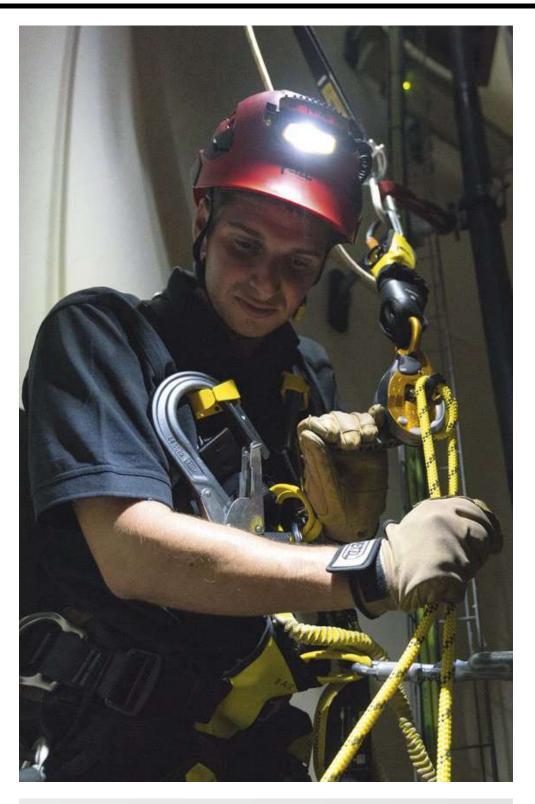




JAG RESCUE KIT

The ready-to-use reversible JAG RESCUE KIT is designed to easily release and lower a victim. It contains a JAG SYSTEM haul kit, a RING OPEN gated ring, an I'D EVAC descender, a CONNEXION FIXE 150 cm anchor strap, a BUCKET bag and an AXIS 11 mm rope with two sewn terminations.



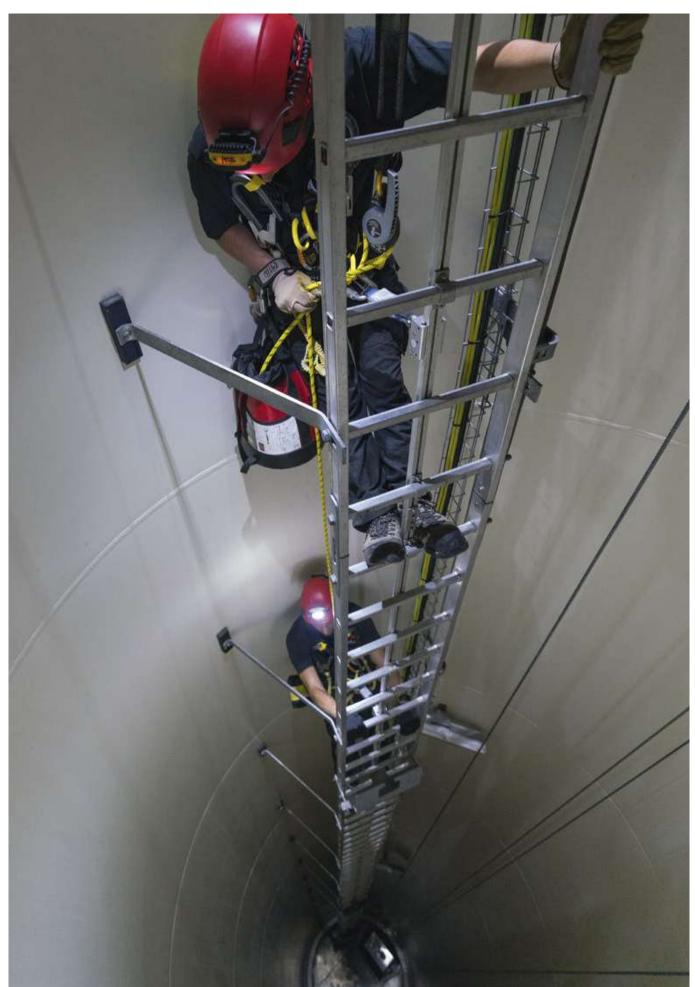


Rescue exercise in a wind turbine shaft, France © 2019 - Petzl Distribution - Vuedici.org - RES - Parc éolien de Marsanne


Release and evacuation of a victim on a CROLL

Operation from below by a team member with his/her own equipment. The rescuer must do a risk assessment before responding and verify (among other things) that the victim's ropes are in good condition. The counterbalance system is used to transfer the victim onto the descender.

The rescuer ascends on the victim's safety line.

- 1. The rescuer transfers him/herself to the RIG descender, tethers to the victim and moves the ASAP up above the victim
- 2. The rescuer puts a second connection in place. S/he can then remove the equipment that is in the victim's way.

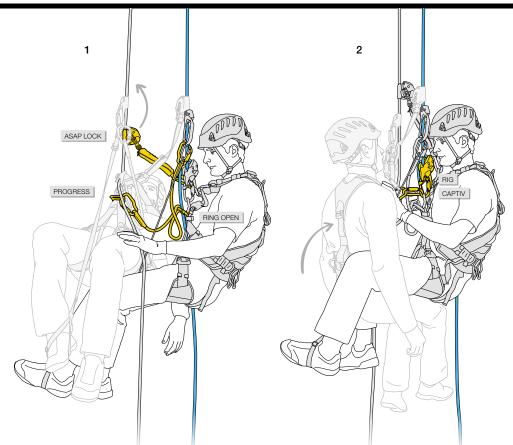

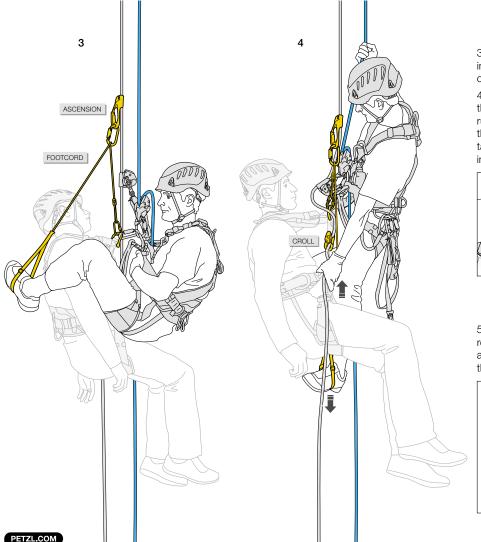

- 3. On the victim's rope, the rescuer installs a foot loop in counterbalance on the ASCENSION handled rope clamp.
- 4. In counterbalance on the foot loop, the rescuer prevents the rope from running through the CROLL and raises the victim. S/he removes the CROLL and takes up as much rope slack as possible in the RIG descender.




5. The rescuer, hanging on the RIG, recovers the ASCENSION. S/he installs a braking carabiner and accompanies the victim to the ground.







Release and rescue using a reversible rescue kit

- Unaccompanied evacuation (when victim doesn't require monitoring or for a free-hanging evacuation):
- 1. Victim suspended by a lanyard, with the energy absorber torn by the fall.
- 2. Hauling (allows the victim to be released).
- 3. Lowering the victim.



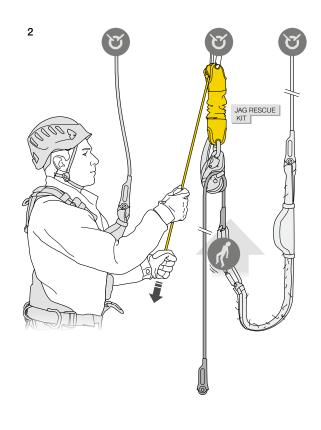

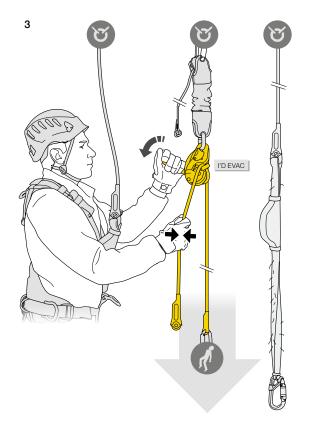



To learn more about using the JAG RESCUE KIT to rescue a victim, see the technical information available at www.petzl.com

Technical rescue teams respond when the situation is especially difficult and requires significant resources to be deployed.

Examples of rescues:

- following a vehicle roll-over into a ravine, the victims are rescued via motorized means
- evacuation of an injured worker from a location that is difficult to access
- helicopter rescue operations in mountainous terrain...

Technical specifics:

- technical rescue teams operate in any terrain. They have complete mastery of all progression and belay techniques on a rope
- when the terrain allows, downward evacuation is preferred because of the gravity-assist
- upward evacuation is a team effort that requires perfect coordination by everyone involved. It demands techniques which are sometimes particularly complex: raising systems, creating a hauling system using lightweight pulleys, counterweight techniques...





MAESTRO

MAESTRO S and MAESTRO L are descenders designed for technical rescue operations. They facilitate the manipulation of heavy loads, in lowering or hauling, and can be used in the primary system or in a back-up belay. This versatility allows rescuers to adapt to any situation they may encounter on the rescue scene.










Using the MAESTRO


The MAESTRO enables controlled lowering of loads up to 250 kg (MAESTRO S) and 280 kg (MAESTRO L).

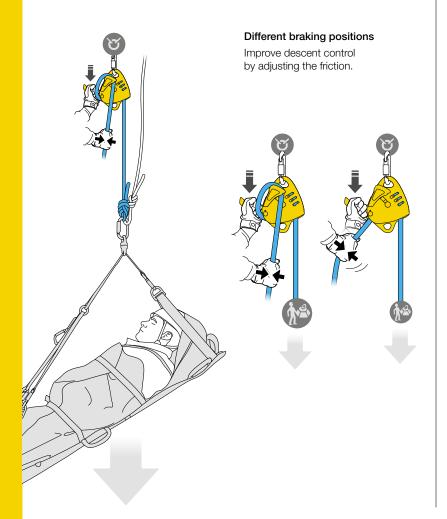


AUTO-LOCK

The AUTO-LOCK system locks the load automatically and returns the handle to the stop position.

The user may then let go of the rope if needed.




Hauling is possible at any time, without manipulating the handle.




Easy conversion to a complex haul system

The MAESTRO has an auxiliary attachment hole for setting up a redirect in a 5:1 haul system.

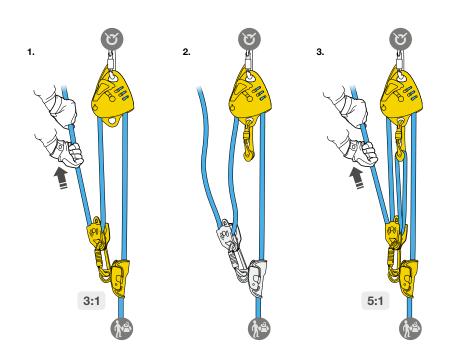









Upward evacuation with a haul line and a belay line

The haul line supports the entire load.

No slack is allowed in the belay rope, so that the load locks instantly in case of haul line failure.

MAESTRO

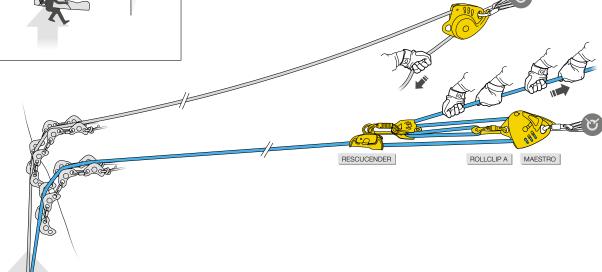




Upward evacuation with two haul lines

Each rope supports half the load

The MAESTRO's excellent pulley efficiency allows the operation to be done using simple haul systems (3:1).

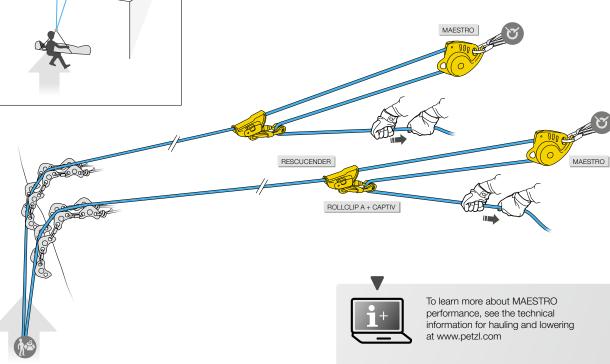

If ski lift equipment fails, the person in charge must evacuate passengers according to the evacuation plan. This evacuation must be done within a predefined time frame, and is generally conducted by the operations staff.

Technical specifics:

- accessing the passengers is done by moving along the cable, from the towers
- these operations are managed simultaneously by multiple autonomous teams, generally composed of:
- a person suspended on the cable who evacuates passengers and whose movements are protected by a team member on the tower
- a person on the ground who receives passengers and guides the movement of the team member on the cable
- the success of these operations hinges largely on the instruction, training and practice of the operations staff (at least once a year)





I'D EVAC

The I'D EVAC self-braking descender is designed for lowering from an anchor. The ergonomic handle is specifically oriented for managing a load from the anchor and offers comfortable descent control. The integrated anti-panic function and anti-error catch limit the risk of an accident due to user error. The AUTO-LOCK system allows the rope to be automatically locked without having to manipulate the handle or tie off the device. The closed auxiliary brake increases the friction as required for the load weight and the rope diameter and provides a constant redirect of the rope.











Ski lift evacuation exercise, Hinterstoder, Austria © 2019 - Petzl Distribution - Lafouche - Hinterstoder

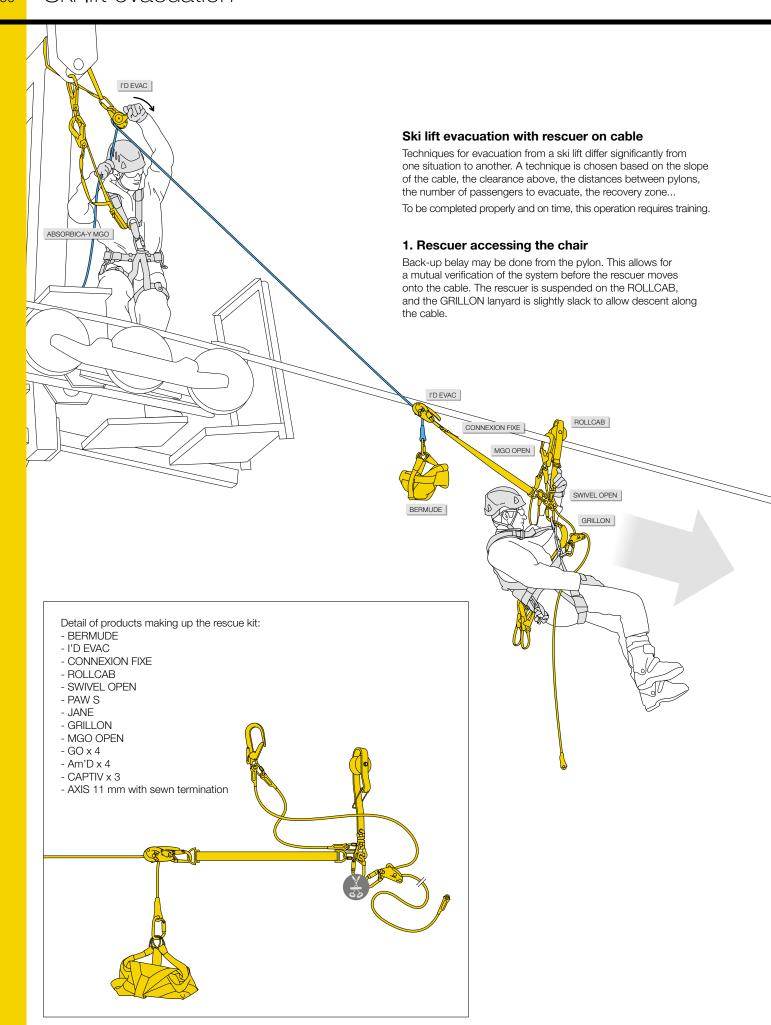



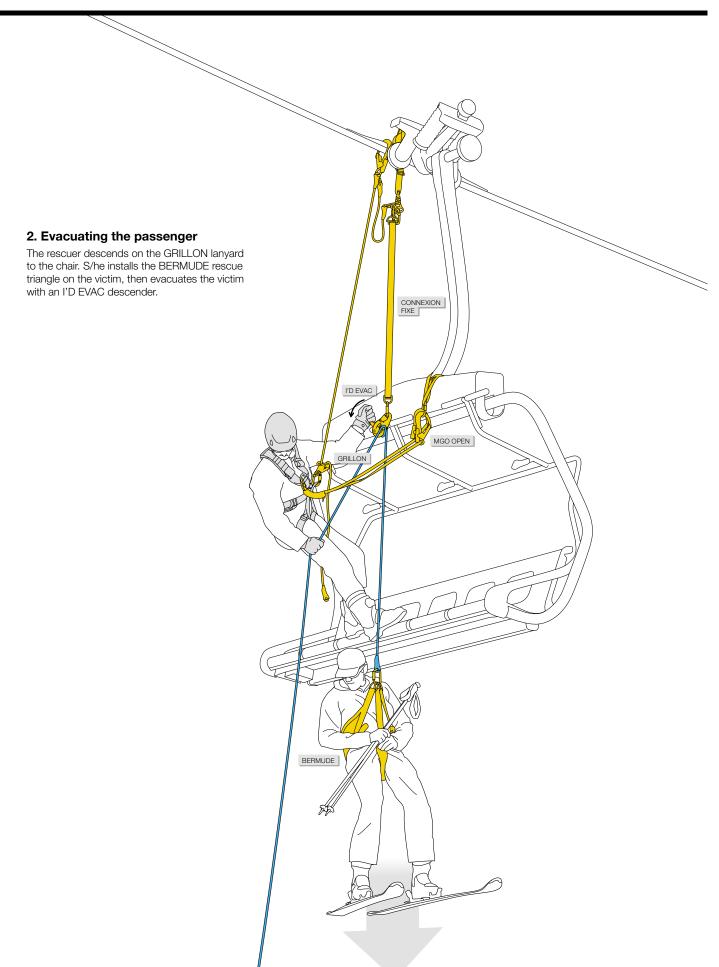



To give each user the best possible fit, Petzl harnesses are adjustable at the waist, shoulders and leg loops. They are equipped with different types of buckles:



Automatic buckles
Automatic buckles are
opened and closed simply
and quickly, even when
wearing gloves, without
loss of adjustment.



Self-locking buckles
These buckles do not require
re-threading to be locked:
they adjust easily in seconds.



General purpose harnesses

Fall arrest harnesses

Fall arrest harnesses with a simple, lightweight design.











Fall arrest and work positioning harnesses

Fall arrest and work positioning harnesses that are comfortable and easily donned.















Harnesses for fall arrest, work positioning and suspension

Versatile and very comfortable harnesses for fall arrest, work positioning and suspension.

















5

Specialized harnesses

Rope access harnesses

Very comfortable harnesses, with integrated ventral rope clamp to facilitate ascending a rope.











Tree care harnesses

Very comfortable harnesses, with attachment bridge for greater freedom of movement in the trees.







Rescue harnesses

Lightweight harnesses suitable for various rescue environments.













Equipment designed for rope rescue (confined spaces, ski lifts...).













These harnesses are designed specifically for fall arrest. In particular, they allow for the attachment of ABSORBICA energy-absorbing lanyards or an ASAP mobile fall arrester.

· Comfort for all work phases

NEWTON harnesses are designed to not interfere with the worker's movements. The anatomical and lightweight design is close-fitting, while giving optimal freedom of movement.

· Easy to use



Harness is easy to open and close

The sternal FAST automatic buckle allows the harness to be opened and closed simply and quickly.



Immediate access to tools

The equipment loops simplify tool organization and the slots allow a TOOLBAG pouch to be added.

Available in international versions

The NEWTON harnesses that are certified to all North American, European and Russian standards have additional features.



Stowage for lanyard connectors

The harnesses have a stowage system for the MGO connectors on fall arrest lanyards on each shoulder strap. In case of a fall, the system releases the MGO connectors and allows the absorber to be deployed.



Easy harness inspection

The sternal and dorsal attachment points are equipped with fall indicators: a red strap appears after a fall to indicate that the harness must be retired.

Great simplicity



NEWTON harnesses have color-coded straps (yellow/black) that allow rapid identification of the upper and lower parts of the harness before donning.

Quick donning



The NEWTON EASYFIT harness is quick-donning, thanks to a vest that helps keep its shape. It is equipped with FAST automatic buckles on the leg loops, allowing the harness to be easily donned with both feet on the ground.

For high visibility



The NEWTON EASYFIT HI-VIZ harness has a fluorescent-colored vest with reflective strips, making the worker highly visible. It makes the worker more visible on a worksite, road or industrial site regardless of the lighting conditions.





NEWTON European version

Fall arrest harness

The NEWTON fall arrest harness is comfortable for work and easy to use. It is certified to European and Russian standards.





NEWTON International version

Fall arrest harness

The NEWTON fall arrest harness is comfortable for work and easy to use. It offers ergonomic stowage of MGO connectors and has fall indicators. It is certified to North American, European and Russian standards.





NEWTON EASYFIT European version

Easy-to-don fall arrest harness

The NEWTON EASYFIT fall arrest harness is easily donned thanks to its EASYFIT design: a vest ensures the harness keeps its shape and the FAST automatic buckles (sternal and leg loop) allow the harness to be donned with both feet on the ground. It is certified to European and Russian







NEWTON EASYFIT International version

Easy-to-don fall arrest harness

The NEWTON EASYFIT fall arrest harness is easily donned thanks to its EASYFIT design: a vest ensures the harness keeps its shape and the FAST automatic buckles (sternal and leg loop) allow the harness to be donned with both feet on the ground. It offers ergonomic stowage of MGO connectors and has fall indicators. It is certified to North American, European and Russian standards.









NEWTON EASYFIT HI-VIZ

Fall arrest harness with high-visibility vest that is easy to don

The NEWTON EASYFIT HI-VIZ fall arrest harness has a fluorescent-colored vest with reflective strips, making the worker highly visible. It is easily donned, thanks to its EASYFIT design. A vest ensures the harness keeps its shape, and the FAST automatic buckles (sternal and leg loop) allow the harness to be donned with both feet on the ground. It offers ergonomic stowage of MGO connectors and has fall indicators. It is certified to North American, European and Russian standards.











These harnesses help provide fall protection for the worker and enable him/her to position him/herself at a workstation, with a GRILLON lanyard, for example. Additionally, they are specifically designed to facilitate vertical progression on a rail or cable (European versions only).

· Quick and easy donning



VOLT and VOLT WIND harnesses are very quick to don. The waistbelt and leg loops are equipped with FAST LT PLUS/FAST LT automatic buckles, allowing the harness to be easily donned while keeping both feet on the ground.

Optimal comfort



Comfortable work positioning

Wide, semi-rigid waistbelt and leg loops give excellent support. The lightweight, breathable construction maximizes air flow.



Ventral attachment point suitable for vertical progression on a rail or cable

The LADDER CLIMB attachment point allows for ventral attachment of the fall-arrest trolley, which distributes the load on the waistbelt and thus ensures optimal comfort. In case of a fall, the attachment point automatically moves upward to a sternal position to ensure a vertical post-fall body position (only on European versions).



Folding side attachment points

Side attachment points can be folded down to prevent them snagging accidentally when not in use.

Easy to use



The harnesses have a stowage system for the MGO connectors on fall arrest lanyards on each shoulder strap. In case of a fall, the system releases the MGO connectors and allows the absorber to be deployed.

· For work on towers and antennas



VOLT harnesses have a wide waistbelt with equipment loops on the back for easy organization of work tools.

• For work inside wind turbine towers



VOLT WIND harnesses have dorsal wear protectors to reduce wear on the straps when moving about inside a wind turbine tower.







VOLT® European version

Fall arrest and work positioning harness with attachment point for vertical progression on rail or cable

The VOLT fall arrest and work positioning harness is very quick to don, thanks to the FAST LT PLUS and FAST LT automatic buckles that allow it to be donned with both feet on the ground. Wide, semi-rigid waistbelt and leg loops give excellent support. Its lightweight, breathable construction maximizes air flow. Its LADDER CLIMB attachment point allows for ventral attachment of the fall-arrest trolley, ensuring optimal comfort during progression. It is certified to European and Russian standards.













VOLT® international version

Fall arrest and work positioning harness

The VOLT fall-arrest and work positioning harness is very quick to put on, thanks to the FAST LT PLUS automatic buckles that allow it to be donned with both feet on the ground. Wide, semi-rigid waistbelt and leg loops give excellent support. Its lightweight, breathable construction maximizes air flow. It features a textile dorsal attachment point designed for connecting a self-retracting fall-arrest system. It is certified to North American and European standards.







VOLT® WIND European version

Fall arrest and work positioning harness for the wind power industry with attachment point for vertical progression on rail or cable

The VOLT WIND fall-arrest and work positioning harness is very quick to put on, thanks to the FAST LT PLUS and FAST LT automatic buckles that allow it to be donned while keeping both feet on the ground. Wide, semi-rigid waistbelt and leg loops give excellent support. Its lightweight, breathable construction maximizes air flow. Its LADDER CLIMB attachment point allows for ventral attachment of the fall-arrest trolley, ensuring optimal comfort during progression. It has wear protectors on the waistbelt and dorsal point to limit wear when moving about inside the wind turbine tower. It is certified to European and Russian standards.







VOLT® WIND international version

Fall arrest and work positioning harness for the wind power industry

The VOLT WIND fall-arrest and work positioning harness is very quick to put on, thanks to the FAST LT PLUS automatic buckles that allow it to be donned while keeping both feet on the ground. Wide, semi-rigid waistbelt and leg loops give excellent support. Its lightweight, breathable construction maximizes air flow. It features a textile dorsal attachment point designed for connecting a self-retracting fall-arrest system. It has wear protectors on the waistbelt and dorsal point to limit wear when moving about inside the wind turbine tower. It is certified to North American and European standards.











Seat for VOLT® harnesses

Seat for VOLT harnesses for greater comfort in suspension

The seat for the VOLT harness attaches to the designated slots on the harness. It provides additional comfort during prolonged suspension.





These harnesses are used for fall protection, for positioning at a workstation, and for working comfortably in suspension.

Comfortable construction



Wide, semi-rigid waistbelt and leg loops give excellent support. The lightweight, breathable construction maximizes air flow.

Convenient adjustment



Easy to adjust

The AVAO harnesses can be adjusted at the waistbelt and shoulder straps. These adjustment points are equipped with self-locking DOUBLEBACK buckles. These do not require re-threading to be locked: the harness adjusts easily in seconds.



Available in easier donning version

The leg loops of AVAO harnesses are equipped with FAST/FAST LT automatic buckles that facilitate donning the harness with both feet on the ground or with large footwear, without loss of adjustment, even when wearing gloves.

· Optimal organization of work tools



AVAO harnesses are equipped with six equipment loops on the sides and at the rear of the waistbelt. They are shaped to facilitate clipping carabiners. Each harness also has slots designed for the CARITOOL tool holder and the TOOLBAG pouch.

· Stowage for lanyard connectors




The harnesses have a stowage system for fall arrest lanyard connectors on each shoulder strap. In case of a fall, this system releases the MGO connector and allows the absorber to be deployed.

• A complete solution, with dorsal attachment point



The AVAO BOD and AVAO BOD FAST full-body harnesses are equipped with a dorsal attachment point for connecting a fall arrest system. In case of a fall on this attachment point, a shorter adjustment of the length between the waistbelt and the leg loops means the load is taken up on the leg loops, allowing the user to remain suspended longer while awaiting rescue.

· A lightweight and flexible solution



Combining a seat harness with a separate chest harness is a more lightweight solution, if the user does not need a dorsal attachment point. It is also a solution for hard-to-fit body types, as it allows combining different seat and chest harness sizes.





AVAO® BOD / AVAO® BOD FAST European version

Comfortable harness for fall arrest, work positioning and suspension

The AVAO BOD fall arrest, work positioning and suspension harness is designed for greater comfort in all situations. Wide, semi-rigid waistbelt and leg loops give excellent support. Its lightweight, breathable construction maximizes air flow. The shoulder straps have a system for stowing the fall arrest lanyard connectors and keeping them within reach. The DOUBLEBACK self-locking buckles at the rear of the harness, between the waistbelt and the leg loops, allow for a shorter adjustment when the dorsal attachment point is used. The harness also facilitates the carrying and organizing of work tools, with multiple gear loops and slots for attaching CARITOOL tool holders and TOOLBAG tool-holder pouches. The harness is fastened by a SCREW-LOCK manual locking carabiner and is certified to European and Russian standards. AVAO BOD features leg loops with DOUBLEBACK self-locking buckles; AVAO BOD FAST has leg loops with FAST LT automatic buckles.











AVAO® BOD / AVAO® BOD FAST international version

Comfortable harness for fall arrest, work positioning and suspension

The AVAO BOD fall arrest, work positioning and suspension harness is designed for greater comfort in all situations. Wide, semi-rigid waistbelt and leg loops give excellent support. Its lightweight, breathable construction maximizes air flow. The shoulder straps have a system for stowing the fall arrest lanyard connectors and keeping them within reach. The DOUBLEBACK self-locking buckles at the rear of the harness, between the waistbelt and the leg loops, allow for a shorter adjustment when the dorsal attachment point is used. The harness also facilitates the carrying and organizing of work tools, with multiple gear loops and slots for attaching CARITOOL tool holders and TOOLBAG tool-holder pouches. The harness has an integrated fall indicator on the dorsal attachment point and is fastened with a TRIACT-LOCK automatic locking carabiner. It is certified to North American and European standards. AVAO BOD features leg loops with DOUBLEBACK self-locking buckles; AVAO BOD FAST has leg loops with FAST automatic buckles.











TOP

Chest harness for seat harness

AVAO® SIT / AVAO® SIT FAST

Comfortable seat harness for work positioning and suspension

buckles; AVAO SIT FAST leg loops have FAST LT automatic buckles.

The TOP chest harness transforms AVAO SIT, AVAO SIT FAST, FALCON, FALCON MOUNTAIN and SEQUOIA SRT seat harnesses into fall arrest harnesses. The foam shoulder straps are widely spaced to reduce neck chafing. When the waistbelt is loaded, they help distribute the load over the shoulders. They also have a system for stowing the fall-arrest lanyard connectors and keeping them within reach.

The AVAO SIT work positioning and suspension seat harness is designed for greater comfort in a variety of situations. Wide, semi-rigid waistbelt and leg loops give excellent support. Its lightweight, breathable construction maximizes air flow. The harness also facilitates the carrying and organizing of work tools, with multiple gear loops and slots for attaching CARITOOL tool holders and TOOLBAG tool-holder pouches. This seat harness is designed to be converted into a fall arrest harness when combined with a TOP chest harness, or into a rope access harness when combined with a TOP CROLL S or L chest harness. The AVAO SIT leg loops have DOUBLEBACK self-locking



































Designed for rope access, these harnesses allow the worker to be protected in the event of a fall and to position him/herself at the workstation. The gated ventral attachment point facilitates rope ascents and makes work in suspension more comfortable.

· Optimal integration of equipment



The gated attachment point allows connection of:
- a CROLL ventral rope clamp on the ventral point for greater efficiency on rope ascents

- a PROGRESS lanyard directly on the ventral attachment point
- a PODIUM seat on the axle of the attachment point, allowing the load to be supported directly by the descender, while guaranteeing mobility at the ventral attachment point

· Optimal organization of work tools



ASTRO harnesses are equipped with six equipment loops on the sides and at the rear of the waistbelt. They are shaped to facilitate clipping carabiners. Each harness also has slots designed for the CARITOOL tool holder and the TOOLBAG pouch.

Ultra-comfortable design



The waistbelt and the leg loops of ASTRO harnesses are semi-rigid and wide in order to limit pressure points and ensure effective support. These two zones are sculpted and lined with breathable foam padding for optimal comfort in suspension and good ventilation. This construction also facilitates harness donning.

· Convenient adjustment



Easy to don

The leg loops of ASTRO harnesses are equipped with FAST/FAST LT automatic buckles that facilitate donning the harness with both feet on the ground or with large footwear, without loss of adjustment, even when wearing gloves.



Easy to adjust


The waistbelt and shoulder straps are equipped with self-locking DOUBLEBACK/DOUBLEBACK PLUS buckles for quick and easy adjustment.

• A complete solution, with dorsal attachment point



ASTRO BOD FAST full-body harnesses are equipped with a dorsal attachment point for attaching a fall arrest system. In case of a fall on this attachment point, a shorter adjustment of the length between the waistbelt and the leg loops means the load is taken up on the leg loops, allowing the user to remain suspended longer while awaiting rescue.

· A lightweight and flexible solution



Combining a seat harness with a separate chest harness is a more lightweight solution, if the user does not need a dorsal attachment point. It is also a solution for hard-to-fit body types, as it allows combining different seat and chest harness sizes.





ASTRO® BOD FAST European version

Ultra-comfortable rope access harness

With an integrated CROLL L ventral rope clamp, the ASTRO BOD FAST harness is designed for greater efficiency and comfort during rope ascents. The gated ventral attachment point allows optimal integration of equipment (ascender, lanyard, seat...). Wide, semi-rigid waistbelt and leg loops give excellent support. They are contoured and lined with breathable foam padding for comfort when suspended. The DOUBLEBACK self-locking buckles at the rear of the harness, between the waistbelt and the leg loops, allow for a shorter adjustment when the dorsal attachment point is used. The harness also facilitates the carrying and organizing of work tools, with multiple gear loops and slots for attaching CARITOOL tool holders and TOOLBAG tool-holder pouches. It is certified to European and Russian standards. The ASTRO BOD FAST European version features leg loops with FAST LT automatic buckles.



































ASTRO® BOD FAST international version

Ultra-comfortable rope access harness

With an integrated CROLL L ventral rope clamp, the ASTRO BOD FAST harness is designed for greater efficiency and comfort during rope ascents. The gated ventral attachment point allows optimal integration of equipment (rope clamp, seat...). Wide, semi-rigid waistbelt and leg loops give excellent support. They are contoured and lined with breathable foam padding for comfort when suspended. The DOUBLEBACK self-locking buckles at the rear of the harness, between the waistbelt and the leg loops, allow for a shorter adjustment when the dorsal attachment point is used. The harness also facilitates the carrying and organizing of work tools, with multiple gear loops and slots for attaching CARITOOL tool holders and TOOLBAG tool-holder pouches. It has a fall indicator on the dorsal attachment point and is certified to North American and European standards. ASTRO BOD FAST international version features leg loops with FAST automatic buckles.



TOP CROLL® S

Chest harness for seat harness, with integrated CROLL S ventral ascender

The TOP CROLL S integrates a CROLL S ventral rope clamp to transform ASTRO SIT FAST, AVAO SIT, AVAO SIT FAST, FALCON, FALCON ASCENT and SEQUOIA SRT harnesses into rope access harnesses. The textile sternal attachment point optimally reduces weight and bulk. The foam shoulder straps are widely spaced to reduce neck chafing. When the waistbelt is loaded, they help distribute the load over the shoulders. The rear connection, on each side of the waistbelt, offers excellent stability.



TOP CROLL® L

Chest harness for seat harness, with integrated CROLL L ventral rope clamp

The TOP CROLL L integrates a CROLL L ventral rope clamp to transform ASTRO SIT FAST, AVAO SIT, AVAO SIT FAST, FALCON, FALCON ASCENT and SEQUOIA SRT harnesses into rope access harnesses. The foam shoulder straps are widely spaced to reduce neck chafing. When the waistbelt is loaded, they help distribute the load over the shoulders.



ASTRO® SIT FAST

Ultra-comfortable seat harness for rope access

The ASTRO SIT FAST rope access seat harness features a gated ventral attachment point that allows optimal integration of equipment (rope clamp, lanyard, seat...). Wide, semi-rigid waistbelt and leg loops give excellent support. They are contoured and lined with breathable foam padding for comfort when suspended. The harness also facilitates the carrying and organizing of work tools, with multiple gear loops and slots for attaching CARITOOL tool holders and TOOLBAG tool-holder pouches. This seat harness is designed to be converted into a full-body harness when combined with a TOP CROLL S or L chest harness. The ASTRO SIT FAST features leg loops with FAST LT automatic buckles.





PODIUM

Seat for prolonged suspension

The PODIUM provides optimal comfort during prolonged suspension. The wide seat offers excellent stability. Rigid sides prevent the webbing straps from cutting into the thighs. The easy-to-use seat has two gear loops and a rear hook, making it easier to store in order to facilitate movement. It connects to ASTRO BOD FAST and ASTRO SIT FAST harnesses with two shackles (find a description of the shackles on page 67).

These harnesses are designed for arborists: they ensure great mobility in the tree and optimally distribute the load between the waistbelt and the leg loops. They also provide excellent lumbar support in the many work phases where the arborist has his/her weight on the harness.

Comfort



The semi-rigid, extra-wide waistbelt ensures excellent support for the user. It is also sculpted and lined with foam padding for improved comfort when suspended.

• Ergonomics



Gated attachment points

The gated attachment points facilitate connection of a ZILLON or MICROFLIP lanyard. They also allow installation of several attachment bridges (adjustable or fixed), as well as accessories like RING attachment rings or SWIVELs, directly on the attachment bridge.



Easy to don


The leg loops of SEQUOIA harnesses are equipped with FAST/FAST LT automatic buckles that facilitate donning the harness with both feet on the ground or with large footwear, without loss of adjustment, even when wearing gloves.

Accessories

Accessories for the SEQUOIA line of harnesses allow each user to adapt the equipment to his/her needs.



For single rope ascent techniques



The SEQUOIA SRT features a ventral attachment point for installing a ZIGZAG mechanical Prusik with the CHICANE and KNEE ASCENT accessories.

For doubled rope ascent techniques



The SEQUOIA harness waistbelt is equipped with a FAST automatic buckle for quick and simple opening and closing, without loss of adjustment, even while wearing gloves.







SEQUOIA SRT

Tree care seat harness for single-rope ascent techniques

The SEQUOIA SRT is a tree care seat harness for single-rope ascent techniques. It has a ventral attachment point that allows a ZIGZAG or ZIGZAG PLUS mechanical Prusik to be installed with the CHICANE and KNEE ASCENT accessories. The extra-wide, semi-rigid waistbelt and leg loops provide comfort for the arborist. It is equipped with DOUBLEBACK PLUS self-locking buckles on the waistbelt and FAST LT PLUS automatic buckles on the leg loops. The gated attachment points allow the user to easily connect a ZILLON or MICROFLIP lanyard, or to install several attachment bridges and accessories directly on the bridge. The harness also facilitates the carrying and organizing of work tools, with multiple equipment loops and slots for attaching CARITOOL tool holders.









SEQUOIA

Tree care seat harness for doubled-rope ascent techniques

The SEQUOIA is a tree care seat harness for doubled-rope ascent techniques. The extra-wide, semi-rigid waistbelt and leg loops provide comfort for the arborist. The waistbelt is equipped with a FAST automatic buckle for quick and simple opening and closing, without loss of adjustment, even while wearing gloves. The leg loops have FAST LT PLUS automatic buckles. The gated attachment points allow the user to easily connect a ZILLON or MICROFLIP lanyard, or to install several attachment bridges and accessories directly on the bridge. The harness also facilitates the carrying and organizing of work tools, with multiple equipment loops and slots for attaching CARITOOL tool holders.



Accessories





Shoulder straps (only for SEQUOIA SRT)


Shoulder straps for SEQUOIA SRT seat harness designed for taking the load from the waistbelt and redistributing it to the shoulders for improved comfort. They connect to the ventral attachment point of the harness and to the two slots at the rear of the waistbelt.



Seat

Wide seat for a comfortable working position during suspension. It has an adjustable width to reduce bulk and facilitate movement within the tree. It connects to the two gated points on the SEQUOIA and SEQUOIA SRT arborist seat harnesses, using the two shackles.





Adjustable attachment bridge

Adjustable attachment bridge for SEQUOIA and SEQUOIA SRT harnesses allows quick and precise adjustment of the position of progression tools installed on the bridge.



Attachment bridge

Attachment bridge for connection to the two gated attachment points of the SEQUOIA and SEQUOIA SRT arborist seat harnesses, to optimize lateral mobility.



The RING connection ring can be used to create multiple anchors or be installed directly onto the SEQUOIA and SEQUOIA SRT harnesses' attachment bridges to improve the arborist's lateral mobility.



Shackles for connecting a seat. Find a description of the shackles on page 67.

































Designed for rescuers, these harnesses are lightweight, for increased mobility and rapid movement during operations. The choice of several models allows adaptation to the different types of environments that can be encountered.

· Comfortable, ultra-lightweight design



Thin, lightweight construction

The semi-rigid, slim waistbelt and leg loops on FALCON harnesses ensure optimal comfort/weight ratio.



Compact, lightweight side attachment points

The textile side attachment points are designed for occasional use and limit bulk and weight.

• Ergonomics



Easy adjustment

The waistbelt and leg loops are equipped with two self-locking DOUBLEBACK buckles for quick and easy adjustment.



Movable leg loops

The foam on the leg loops of the FALCON harness can be adjusted for perfect positioning.

· Optimal organization of equipment and work tools



Equipment loops and slots

FALCON harnesses are equipped with equipment loops on the sides and at the rear of the waistbelt. Each harness also has slots designed for the CARITOOL tool holder and the TOOLBAG pouch.

• For work in suspension



The metal ventral attachment point on the FALCON harness distributes the load between the waistbelt and the leg loops during suspension.

• For efficiency when ascending a rope



The two-part ventral attachment point of the FALCON ASCENT harness increases the efficiency of rope ascents when using a CROLL ventral rope clamp.

For operations using climbing techniques



The textile bridge construction of the FALCON MOUNTAIN harness favors progression with climbing techniques and makes for comfortable walking.







FALCON

FALCON ASCENT

Lightweight seat harness for suspended rescue

FALCON is a lightweight seat harness with a metal ventral attachment point that distributes the load between the waistbelt and the leg loops during suspended rescue. It has a waistbelt and leg loops that are semi-rigid for comfort and equipped with self-locking DOUBLEBACK buckles for quick and easy adjustment. The rear buckle allows a TOP or TOP CROLL chest harness to be attached.

Lightweight seat harness for rescue operations involving rope ascent FALCON ASCENT is a lightweight seat harness featuring a two-part ventral attachment point that fastens with an OMNI carabiner. This attachment point makes it more efficient during rescue operations involving rope ascent. The FALCON ASCENT harness features a semi-rigid waistbelt and leg loops for maximum comfort and self-locking DOUBLEBACK buckles for quick and easy

adjustment. The rear buckle allows a TOP CROLL chest harness to be attached.































CHEST'AIR

Chest harness for seat harnesses

buckle allows a TOP chest harness to be installed.

FALCON MOUNTAIN

The CHEST'AIR chest harness transforms FALCON, FALCON MOUNTAIN, AVAO SIT and SEQUOIA SRT seat harnesses into fall arrest harnesses. Connects simply to the harness ventral attachment point for rapid installation. It adapts easily to all body types with its DOUBLEBACK self-locking buckles on the shoulder straps and ventral strap.

Very lightweight seat harness for rescue operations involving technical climbing FALCON MOUNTAIN is a very lightweight seat harness for rescue operations involving technical climbing. It features a bridge construction that favors progression with climbing techniques and makes it comfortable when walking. It has a waistbelt and leg loops that are semi-rigid for comfort and equipped with self-locking DOUBLEBACK buckles for quick and easy adjustment. The rear

Rescue litter



Tilting device for NEST litter

The STEF tilting device joins the three connection points of the NEST litter and allows it to be easily tilted according to the terrain. It has three Am'D TRIACT-LOCK connectors for automatic locking of the connection points, and a swivel for precise orientation of the litter.

NEST

Litter for confined spaces

The NEST litter was developed in partnership with the French national caving rescue organization. It allows a victim to be transported horizontally, vertically or at an angle. It is easy to manipulate and simplifies installation of a victim. It is suitable for all technical rope rescue, particularly in confined spaces.

Accessory



Bag for NEST litter

The bag for the NEST litter allows it to be transported and stored. The openings at either end allow the handles of the litter to protrude, for easier handling. It is equipped with three handles and a bandolier system for easier transport.

Evacuation triangles

Evacuation triangles are mainly used for rescue on ski lifts and by firefighters.

They allow unequipped people to be evacuated in minimal time.



PITAGOR

Evacuation triangle with shoulder straps

The PITAGOR is an evacuation triangle with shoulder straps that is easy to put on and adjust with the DOUBLEBACK self-locking buckles.



BERMUDE

Evacuation triangle without shoulder straps

The BERMUDE is an evacuation triangle without shoulder straps that is easily put on and adapts without adjustment to different sizes.







Spreader for harnesses

Spreader for full body harnesses or seat harnesses used in conjunction with a chest harness, allowing upright descent (for confined spaces).





CARITOOL

Harness tool holder

The CARITOOL tool holder provides one-handed tool access and storage. It slips onto the harness straps and stays in place, thanks to its stabilizing clip. The gate has a protective feature that limits accidental snagging. It is available in two sizes.







TOOLBAG

Tool pouch

The TOOLBAG tool pouch allows the user to organize his/her tools during suspended work. The cord lock allows the pouch to be closed easily during transport or when moving about. The pouch attaches easily to any type of harness. Available in three sizes: XS, S and L.



RING OPEN

Multidirectional gated ring

See page 106 for details on the RING OPEN gated ring.



Shackles

Shackles for connecting a seat. Connection to the gated attachment point on harnesses ensures optimal integration of equipment.

































			European versions		International versions		
			References	Certifications	References	Certifications	
Fall arrest harr	ness						
NEWTON		NEWTON	C73AAA 1	CE EN 361, EAC	C73AAA 1U	CE EN 361, EAC, ANSI Z359.11,	
			C73AAA 2		C73AAA 2U	CSA Z259.10	
		NEWTON EASYFIT	C73JFA 0	CE EN 361, EAC	C73JFA 0U	CE EN 361,	
			C73JFA 1		C73JFA 1U C73JFN 1U (1)	EAC, ANSI Z359.11, CSA Z259.10	
			C73JFA 2		C73JFA 2U C73JFN 2U (1)		
		NEWTON EASYFIT HI-VIZ	-		C73JFV 1U	CE EN 361, EN ISO 20471, EAC, ANSI Z359.11, ANSI 107,	
				-	C73JFV 2U	CSA Z259.10, CSA Z96-15	
all arrest and	work pos	itioning harnesses					
		VOLT	C072AA00	CE EN 361, CE EN 358, CE EN 813, EAC	C072CA00		
NEW 2020 VOLT			C072AA01		C072CA01	ANSI Z359.11, CSA Z259.10,	
			C072AA02		C072CA02		
		VOLT WIND	C072BA00		C072DA00	CE EN 361, CE EN 358	
			C072BA01		C072DA01		
			C072BA02		C072DA02	_	
Seat for VOLT	1		C072EA00	CE EN 358 (3)	-		
narnesses				.,			
Harnesses for	fall arrest,	work positioning a	C071AA00	CE EN 361, EN 358, EN 813, EAC	C071CA00		
			C071AA01		C071CA01		
			C071AA02		C071CA02	ANSI Z359.11, NFPA 1983 class III, CSA Z259.10, CE EN 361, CE EN 358,	
AVAO BOD		AVAO BOD FAST	C071BA00		C071DA00		
			C071BA03 (1)		C071DA03 (1)	CE EN 813	
			C071BA04 (1)		C071DA04 (1)		
			C071BA05 (1)		C071DA05 (1)		
ТОР			C081AA00 C081AA01 (1)	CE EN 361 (2), EAC	-	-	
		AVAO SIT	C079AA00 C079AA02 (1)	CE EN 358, EN 813, EAC			
AVAO SIT			C079AA01 C079AA03 (1)				
		AVAO SIT FAST	C079BA00		-	-	
			C079BA01				



	Attachment points				Sizes			Maint	
	dorsal	sternal	ventral	side	Size	Waistbelt	Leg loops	Height	Weight
	•	•	-	-	1	70 - 93 cm	47 - 62 cm	165 - 185 cm	1050 g
					2	83 - 120 cm	50 - 65 cm	175 - 200 cm	1080 g
	•		-	-	0	65 - 80 cm	44 - 59 cm	160 - 180 cm	1240 g
		•			1	70 - 93 cm	47 - 62 cm	165 - 185 cm	1300 g
					2	83 - 120 cm	50 - 65 cm	175 - 200 cm	1350 g
	•	•	-	-	1	70 - 93 cm	47 - 62 cm	165 - 185 cm	1360 g
					2	83 - 120 cm	50 - 65 cm	175 - 200 cm	1410 g
			-	•	0	65 - 80 cm	44 - 59 cm	160 - 180 cm	2100 g 2300 g (4)
	•	•			1	70 - 93 cm	47 - 62 cm	165 - 185 cm	2150 g 2350 g (4)
					2	83 - 120 cm	50 - 65 cm	175 - 200 cm	2230 g 2430 g (4)
				•	0	65 - 80 cm	44 - 59 cm	160 - 180 cm	2150 g 2350 g (4)
	•	•	-		1	70 - 93 cm	47 - 62 cm	165 - 185 cm	2200 g 2400 g (4)
					2	83 - 120 cm	50 - 65 cm	175 - 200 cm	2280 g 2480 g (4)
	-	-	-	-	-	-	-	-	1045 g
			•	•	0	65 - 80 cm	44 - 59 cm	160 - 180 cm	2045 g 2215 g (4)
	•	•			1	70 - 93 cm	47 - 62 cm	165 - 185 cm	2090 g 2260 g (4)
					2	83 - 120 cm	50 - 65 cm	175 - 200 cm	2170 g 2340 g (4)
	•		•	•	0	65 - 80 cm	44 - 59 cm	160 - 180 cm	2000 g 2350 g (4)
		•			1	70 - 93 cm	47 - 62 cm	165 - 185 cm	2045 g 2400 g (4)
					2	83 - 120 cm	50 - 65 cm	175 - 200 cm	2125 g 2485 g (4)
	-	•	-	-	-	-	-	160 - 200 cm	660 g
	-	-	•	•	1	70 - 93 cm	47 - 62 cm	165 - 185 cm	1175 g
					2	83 - 120 cm	50 - 65 cm	175 - 200 cm	1190 g
	-		•	•	0	65 - 80 cm	44 - 59 cm	160 - 180 cm	1115 g
		-			1	70 - 93 cm	47 - 62 cm	165 - 185 cm	1130 g
					2	83 - 120 cm	50 - 65 cm	175 - 200 cm	1145 g


































		1	European versions	Inte	rnational versions	
		References	Certifications	References	Certifications	
Rope access harnesses				ı		
riope doocso namesses	,	00004400		C083BA00	ANIOL 7050 11	
V 7		C083AA00	CE EN 361,	C083BA03 (1)	ANSI Z359.11, NFPA 1983 class III,	
ASTRO BOD FAST		C083AA01	EN 358, EN 813,	C083BA01 C083BA04 (1)	CSA Z259.10, CE EN 361,	
	BE		EN 12841 type B, EAC	C083BA02	EN 358, EN 813,	
		C083AA02		C083BA05 (1)	EN 12841 type B	
TOP CROLL S	M	C081BA00	CE EN 361 (2), EN 12841 type B,	_	-	
	11/1		EAC			
TOP CROLL L		C081CA00	CE EN 361 (3), EN 12841 type B, EAC	-	-	
	•	C085AA00				
ASTRO SIT FAST		C085AA01	— CE EN 358, EN 813,	-	-	
		C085AA02	EAC			
PODIUM		S071AA00	-	-	-	
Tree care harnesses						
		C069BA00				
	SEQUOIA SRT	C069BA01				
DEGLIQUA PROPERTIES		C069BA02	CE EN 358, EN 813, EAC	-	-	
SEQUOIA		C069AA00				
	SEQUOIA	C069AA01				
		C069AA02				
Shoulder straps		C069DA00	-	-	-	
Seat		S069AA00	-	-	-	
Adjustable attachment bri	dge	C69R	-	-	-	
	40 cm	C069CA00				
Attachment bridge 45 cm		C069CA01	-	-	-	
	50 cm	C069CA02				
Rescue harnesses						
		C038AA00				
	FALCON	C038AA01	CE EN 358, EN 813, EAC	_	_	
		C038AA03 (1) C038AA02				
FALCON TO		C038AA04 (1)				
	FALCON ASCENT	C038BA00	CE EN 358, EN 813,	-	-	
		C038BA01	EAC CE EN 358, EN 813,			
	FALCON MOUNTAIN	C038CA00	EN 12277 type C,	-	-	
	WOONAN	C038CA01	EAC CE EN 361 (3),			
CHEST'AIR		C98A	EN 12277 type D	-	-	
Litter and evacuation tr	iangles					
NEW 2020 NEST		S061AA00	-	-	-	
NEW 2020 STEF		S059AA00 S059BA00 (5)	-	-	-	
NEW 2020 Bag for NEST litter		S062AA00	-	-	-	
PITAGOR		C80 BR	EN 1497, EN 1498	-	-	
BERMUDE		C80	EN 1498	-	-	
Harness accessories						
LIFT		L54	CE	-	-	
		P042AA00				
CARITOOL		P042AA01	-	-	-	
		S047AA00	-	-	-	
TOOLBAG		S47Y S	-	-	-	
		S47Y L	-	-	-	
RING OPEN		P28	CE EN 362	-	-	
Shackles		C087AA00	-	-	_	



	Attachme	ent points			s	izes		
dorsal	sternal	ventral	side	Size	Waistbelt	Leg loops	Height	Weight
			J.					
				0	65 - 80 cm	44 - 59 cm	160 - 180 cm	1855 g / 2480 g (4)
•	•	•	•	1	70 - 93 cm	47 - 62 cm	165 - 185 cm	1900 g / 2530 g (4)
				2	83 - 120 cm	50 - 65 cm	175 - 200 cm	1980 g / 2620 g (4)
-	•	-	-	-	-	-	160 - 200 cm	515 g
-	•	-	-	-	-	-	160 - 200 cm	600 g
				0	65 - 80 cm	44 - 59 cm	160 - 180 cm	1025 g
-	-	•	•	1	70 - 93 cm	47 - 62 cm	165 - 185 cm	1040 g
				2	83 - 120 cm	50 - 65 cm	175 - 200 cm	1055 g
-	-	-	-	-	-	-	-	1060 g
				0	65 - 80 cm	44 - 59 cm	-	1580 g
-	-	•	•	1	70 - 93 cm	47 - 62 cm	-	1630 g
				2	83 - 120 cm	50 - 65 cm	-	1700 g
				0	65 - 80 cm	44 - 59 cm	-	1480 g
-	-	-	•	1	70 - 93 cm	47 - 62 cm	-	1530 g
				2	83 - 120 cm	50 - 65 cm	-	1600 g
-	-	-	-	-	-	-	-	190 g
-	-	-	-	-	-	-	-	920 g
-	-	-	-	-	-	-	-	220 g
				S				65 g
-	-	-	-	М	-	-	-	70 g
				L				75 g
				0	65 - 80 cm	44 - 59 cm	-	840 g
-	-	•	•	1	70 - 93 cm	47 - 62 cm	-	855 g
				2	83 - 120 cm	50 - 65 cm	-	885 g
	-	•	•	1	70 - 93 cm	47 - 62 cm	-	765 g
-	-	•		2	83 - 120 cm	50 - 65 cm	-	795 g
	-	•	•	1	70 - 93 cm	47 - 62 cm	-	810 g
				2	83 - 120 cm	50 - 65 cm	-	840 g
-	•	-	-	-	-	-	160 - 200 cm	495 g
-	-	-	-	-	-	-	-	13100 g
-	-	-	-	-	-	-	-	640 g
-	-	-	-	-	-	-	-	1860 g
-	-	-	-	-	-	-	-	1290 g
-	-	-	-	-	-	-	-	795 g
 -	-	-	-	-	-	-	-	520 g
-	-	-	-	S	_	-	-	35 g
_	-		-	L		_		75 g
-	-	-	-	XS (1.3 I)	-	-	-	105 g
-	-	-	-	S (2.5 I)	-	-	-	170 g
-	-	-	-	L (5 I)	-	-	-	240 g
-	-	-	-	-	-	-	-	70 g
-	-	-	-	-	-	-	-	20 g





































Comfortable helmets

Helmets with webbing suspension for optimal comfort.











Lightweight helmets

Lightweight, compact helmet with hybrid construction liner (EPP and EPS foams).









Protective eye and face shields

Protective eye and face shields for VERTEX and STRATO helmets.







Protector for VIZIR and VIZIR SHADOW







Accessories





Nape protector







Storage bag

Fransparent stickers













Seffective stickers



Hats and balaclava

Hats and balaclava for protection against rain and cold.













Essential for work at height and certain industrial activities, helmets give the user effective protection from falling objects, or if the person him/herself falls. Thanks to a very secure fit on the head, Petzl helmets are comfortable to wear in any situation. With a complete line of entirely modular accessories, they meet the diverse needs of professionals.

· Excellent fit on the head



CENTERFIT adjustment

The CENTERFIT adjustment system allows the helmet to be perfectly centered on the head. The headband is easy to adjust by simultaneously rotating the two side adjustment wheels, even while wearing gloves.



FLIP&FIT system

The FLIP&FIT system immediately positions the headband in a low position, to ensure that the helmet fits securely on the head. The headband folds into the shell for easy storage and transport.

• DUAL chinstrap strength is adjustable, to adapt to any work situation



The DUAL chinstrap allows the worker to adjust chinstrap strength in order to adapt the helmet to different environments: work at height (EN 12492) or on the ground (EN 397). The clip has two positions, corresponding to the following two uses:

- higher strength to limit the risk of the helmet coming off in a fall (strength > 50 daN)
- lower strength to limit the risk of strangulation, by releasing if snagged when user is at ground level (strength < 25 daN)

Solution for different	protection needs		ts with external shell		ts with xternal shell
				W	
		VERTEX	STRATO	VERTEX VENT	STRATO VENT
PENETRATION IMPACT PROTECTION	Protection against falling objects				•
VENTILATION	Ventilation holes allow airflow through the helmet		-		•
ELECTRICAL PROTECTION	Protection against electrical hazards		•		-
MOLITEN METAL PROTECTION	Protection against molten metal splash		•	•	-
LATERAL DEFORMATION	Protection against lateral deformation		•		•



• Modular accessories

Extensive line of protective eye and face shields, headlamps and accessories

- eye shields, face shields for protection against electric arc hazards, specific shields for tree care
- headlamps for lighting
- nametag holder, nape protector, helmet protectors, chinstraps



































· Multiple choices

















Available in assorted colors

VERTEX helmets are available in seven standard colors; STRATO helmets are available in four colors.

VERTEX and STRATO helmets are also available in two HI-VIZ versions, with a fluorescent outer shell (yellow or orange), phosphorescent clips and reflective bands, for optimal visibility of the worker, day or night.


Multiple certifications

Depending on the model, Petzl helmets meet the requirements for the following certifications:

- European EN 397, EN 12492 and EN 50365
- American ANSI Z89.1
- Canadian CSA Z94.1
- Russian EAC
- Australian AS/NZS 1801

• Easy to install, very modular

All Petzl helmets can be adapted to additional needs for protection or lighting in just a few seconds, thanks to the EASYCLIP system and a variety of inserts.





The EASYCLIP system allows quick installation of a protective shield. EASYCLIP is easy to install and is compatible with all Petzl helmets and shields. It comes with every protective eye and face shield.

• Petzl Custom service for helmets





CUSTOM

- Petzl Custom service can:
 personalize the helmet with a logo and reflective stickers
- pre-mount Petzl eye and face shields and accessories of your choice onto the helmet, for a ready-made solution, with each helmet delivered in an individual transport pouch Available for orders of minimum 20 helmets.

Comfortable construction



VERTEX helmets have a six-point webbing suspension system, conforming to the shape of the head for maximum comfort. Shock absorption is achieved through deformation of the external shell.

• Lightweight construction



The liner of STRATO helmets is designed in two parts: EPP (expanded polypropylene) and EPS (expanded polystyrene), for reduced weight. Shock absorption is achieved through deformation of the liner.







Comfortable helmet

The VERTEX helmet is very comfortable, thanks to its six-point textile suspension and CENTERFIT and FLIP&FIT systems, which guarantee that the helmet fits securely on the head. The adjustable-strength chinstrap makes it ideal for both work at height and on the ground. The unventilated outer shell protects against electrical hazards, molten metal splash and flames. With its potential for integration of a Petzl headlamp, hearing protection, and multiple accessories, it is an entirely modular helmet, thus meeting the specific additional needs of professionals.



VERTEX® HI-VIZ

Comfortable high-visibility helmet

The high visibility version features a fluorescent outer shell with phosphorescent clips and reflective bands, for optimal visibility of the worker, day or night.





VERTEX® VENT

Comfortable ventilated helmet

The VERTEX VENT helmet is very comfortable, thanks to its six-point textile suspension and CENTERFIT and FLIP&FIT systems, which guarantee that the helmet fits securely on the head. The adjustable-strength chinstrap makes it ideal for both work at height and on the ground. It has ventilation holes with sliding shutters to allow airflow through the helmet. With its potential for integration of a Petzl headlamp, hearing protection, and multiple accessories, it is an entirely modular helmet, thus meeting the specific additional





The high visibility version features a fluorescent outer shell with phosphorescent clips and reflective bands, for optimal visibility of the worker, day or night.



STRATO

Lightweight helmet

The STRATO helmet is very lightweight and comfortable, thanks to its CENTERFIT and FLIP&FIT systems, which quarantee that the helmet fits securely on the head. The adjustable-strength chinstrap makes it ideal for both work at height and on the ground. The unventilated outer shell protects against electrical hazards, molten metal splash and flames. With its potential for integration of a Petzl headlamp, hearing protection, and multiple accessories, it is an entirely modular helmet, thus meeting the specific additional needs of professionals.



STRATO HI-VIZ

Lightweight high-visibility helmet

The high visibility version features a fluorescent outer shell with phosphorescent clips and reflective bands, for optimal visibility of the worker, day or night.



STRATO VENT

Lightweight ventilated helmet

The STRATO VENT helmet is very lightweight and comfortable, thanks to its CENTERFIT and FLIP&FIT systems, which ensure that the helmet fits securely on the head. The adjustable-strength chinstrap makes it ideal for both work at height and on the ground. It has ventilation holes that allow airflow through the helmet. With its potential for integration of a Petzl headlamp, hearing protection, and multiple accessories, it is an entirely modular helmet, thus meeting the specific additional needs of professionals.



STRATO VENT HI-VIZ

Lightweight, ventilated high-visibility helmet

The high visibility version features a fluorescent outer shell with phosphorescent clips and reflective bands. for optimal visibility of the worker, day or night.





































Protective eye and face shields





VIZIR

Eye shield with EASYCLIP system for VERTEX and STRATO helmets

The VIZIR eye shield protects the eyes against projectile hazards. It is easy to install on VERTEX and STRATO helmets with the EASYCLIP attachment system. It also has scratch-resistant and anti-fog coatings.



VIZIR SHADOW

Tinted eye shield with EASYCLIP system for VERTEX and STRATO helmets

The VIZIR SHADOW eye shield provides eye protection against projectile hazards. It is easy to install on VERTEX and STRATO helmets with the EASYCLIP attachment system. It has a level 2.5 solar protection filter, and anti-scratch and anti-fog treatments.



Protector for VIZIR and VIZIR SHADOW

The protector for VIZIR and VIZIR SHADOW protects the eye shields from scratches. It is installed directly on the VIZIR and VIZIR SHADOW eye shields. It allows a Petzl headlamp to be worn, thanks to a mounting slot on the protector.



VIZEN.

Face shield for protection against electric arc hazards, with EASYCLIP system for VERTEX and STRATO helmets

The VIZEN face shield protects against electric arc hazards. This full-coverage shield offers face and eye protection while preserving peripheral vision. It is easily installed on VERTEX and STRATO helmets, thanks to the EASYCLIP attachment system. It also has scratch-resistant and anti-fog coatings.



VIZEN MESH

Face shield for tree care for VERTEX and STRATO helmets, with EASYCLIP system

The VIZEN MESH face shield protects against flying wood chips and shavings. This full-coverage shield offers complete face protection while ensuring good visibility. It is easily installed on VERTEX and STRATO helmets, thanks to the EASYCLIP attachment system.



Mounting clips for welding mask

Mounting clips allow a Bollé welding mask to be installed.



Accessories





Nametag holder for VERTEX® and STRATO helmets

The nametag holder for VERTEX and STRATO helmets allows quick identification of the worker. It is easy to install and provides effective rain protection for business cards.





Nape protector for VERTEX® and STRATO helmets

The nape protector for VERTEX and STRATO helmets provides effective sun and rain protection for the nape of the neck. Fluorescent colors give the worker optimal visibility, night and day. Available in two colors.





Protector for VERTEX® helmet



The protector for the VERTEX helmet is easy to install and protects the shell from soiling and splash.





Protector for STRATO helmet



The protector for the STRATO helmet is easy to install and protects the shell from soiling and splash.





Storage bag for VERTEX® and STRATO helmets

Storage bag to protect VERTEX and STRATO helmets during storage and transport. Thanks to a closed interior compartment, accessories are also protected.







This chinstrap allows the chinstrap of VERTEX and STRATO helmets to be changed or replaced. It allows the worker to modify chinstrap strength in order to adapt the helmet to different environments: work at height or on the ground. Available in two colors and in a long version.









Accessories



Headband with comfort foam for VERTEX® and STRATO helmets

Headband with comfort foam for VERTEX and STRATO helmets (pack of 5)

Ready to install headband with comfort foam (standard or absorbent), to extend the life of a VERTEX or STRATO helmet.



Comfort foam for VERTEX® and STRATO helmets

Comfort foam (standard or absorbent), ready to install on headband of a VERTEX or STRATO helmet, to prolong its life.



Upper foam for STRATO helmet
Upper foam installs on the liner of the STRATO helmet, to extend its life. It is comfortable, absorbent and machine-washable.



Transparent stickers for VERTEX® and STRATO helmets

Transparent stickers allow VERTEX and STRATO helmets to be personalized using a permanent marker or laser printer.



Reflective stickers for VERTEX®

Reflective stickers for increased visibility of VERTEX helmets.



Reflective stickers for STRATO

Reflective stickers for increased visibility of STRATO helmets.









LINFR

Breathable cap for wicking perspiration

LINER is a breathable cap for wicking perspiration and drying quickly. The seamless fitted design makes it comfortable to wear under a helmet, without getting in the way.

Buff® is a trademark and property of Original Buff



BEANIE

Protective cap for cold and wind

BEANIE is a cap that protects the head on cold and windy days. The design, specific to each zone, optimizes thermal insulation and regulates moisture. The seamless fitted design and side vents make it comfortable to wear under a helmet, without getting in the way.



BALACLAVA

Balaclava for protection against cold and wind

BALACLAVA protects the head, the face and the neck on cold, windy days, The design, specific to each zone, optimizes thermal insulation and regulates moisture. The seamless fitted design and multiple side vents make it comfortable to wear under a helmet, without getting in the way.



		Certifications	Weight
Eye and face shields			
VIZIR	A015AA00	CE EN 166, 1BT, ANSI Z87.1, EAC	80 g
VIZIR SHADOW	A015BA00	CE EN 166, 1BT, CE EN 172, 5-2,5, ANSI Z87.1, EAC	80 g
Protector for VIZIR and VIZIR SHADOW	A015CA00	-	75 g
VIZEN	A014AA00	CE EN 166, 1BT8, CE EN 170, 2C-1,2, GS ET-29, Class 1, ANSI Z87.1, EAC	180 g
VIZEN MESH	A021AA00	CE EN 1731, S, ANSI Z87.1, EAC	117 g
Mounting clips for welding mask	A017AA00	-	-

		Color	Version	Weight
Accessories				
Nametag holder for VERTEX and STRATO helmets	A018AA00	-	-	45 g
Nape protector for VERTEX and STRATO helmets	A019AA00	yellow	-	55 g
Nape protector for VENTEX and STRATO heimets	A019AA01	orange		33 g
Protector for VERTEX helmet	A012AA00	-	-	60 g
Protector for STRATO helmet	A012BA00	-	-	60 g
Storage bag for VERTEX and STRATO helmets	A022AA00	-	-	175 g
	A010FA00	yellow / black	standard	
DUAL chinstrap for VERTEX and STRATO helmets	A010FA01	black	standard	34 g
	A010FA02	yellow / black	long	
Headband with comfort foam for VERTEX	A010HA00	_	standard	30 g
and STRATO helmets	A010JA00	-	absorbent	30 g
Comfort foam for VERTEX and STRATO helmets	A010KA00		standard	15 g
Comfort foam for VERTEX and STRATO Heimets	A010LA00	_	absorbent	10 9
Upper foam for STRATO helmet	A020EA00	-	absorbent	15 g
Transparent stickers for VERTEX and STRATO	A10100	-	-	-
Reflective stickers for VERTEX	A010MA00	-	-	10 g
Reflective stickers for STRATO	A020FA00	-	-	10 g

		Size	Head circumference	Weight
Hats and balaclava				
LINER	A016AA00	M-L	56-59 cm	15.0
LINEN	A016AA01	L-XL	59-63 cm	15 g
BEANIE	A016BA00	M-L	56-59 cm	05.0
DEAINIE	A016BA01	L-XL	59-63 cm	25 g
BALACLAVA	A016CA00	M-L	56-59 cm	60 g
DALACLAVA	A016CA01	L-XL	59-63 cm	60 g



































		European certifications	U.S. certifications	Canadian certification	Russian certification	Australian certification	P	IMPACT ROTECTIO	ON		RATION	
							EN 397	EN 12492	ANSI Z89.1	EN 397	ANSI Z89.1	
Comfortable	helmets					·						
	A010AA00											
	A010AA01											
	A010AA02	CE,										
W.	A010AA03	EN 397, EN 50365	ANSI Z89.1 Type I Class E	CSA Z94.1 Type I Class E	EAC	AS/NZS 1801	•	•	•	•	•	
VERTEX	A010AA04	EN 30303										
	A010AA05											
	A010AA06											
VERTEX	A010DA00	CE, EN 397,	ANSI Z89.1		EAC	AS/NZS 1801	•	_	_	_	_	
HI-VIZ	A010DA01	EN 50365	Type I Class E	-	EAC	A5/NZ5 1601	•	•	•	•	•	
	A010CA00											
	A010CA01											
-	A010CA02	٥٢										
W	A010CA03	CE, EN 12492,	ANSI Z89.1 Type I Class C	-	EAC	-	•	•	•	•	•	
VERTEX VENT	A010CA04	EN 397										
	A010CA05											
	A010CA06											
VERTEX VENT	A010EA00	CE,	ANSI Z89.1		F40			_	_	_		
HI-VIZ	A010EA01	EN 12492, EN 397	Type I Class C	-	EAC	-	•	•	•	•	•	
Lightweight h	elmets											
	A020AA00											
	A020AA01	CE, EN 397 (1),	ANSI Z89.1 Type I Class E	_	EAC	_	•	•	•	•	•	
STRATO	A020AA02	EN 50365 (2)	Type I Class E		27.0							
STRATO	A020AA03											
STRATO	A020CA00	CE, EN 397 (1),	ANSI Z89.1	_	EAC	_		•		•	•	
HI-VIZ	A020CA01	EN 50365 (2)	Type I Class E	-	LAU	-						
	A020BA00											
Sa T	A020BA01	CE,	ANSI Z89.1 Type I Class C		EAC		•					
A A	A020BA02	EN 12492	Type I Class C	-	EAC	-						
STRATO VENT	A020BA03											
STRATO VENT	A020DA00	CE,	ANSI Z89.1		EAC			_				
HI-VIZ	A020DA01	EN 12492	Type I Class C	-	EAU		•				•	



8	CHINSTRA ETRENGTI EN 12492	ANSI	VENTILATION EN	EN PF	LECTRICAROTECTIC	DN 	MOLTEN METAL PROTECTION	RESIS	AME TANCE	LATERAL DEFORMATION	TEMPE	DW RATURE	HIGH VISIBILITY	Head circumference	Weight	
EN 397 (3)	(4)	Z89.1	EN 12492	397	EN 50365	ANSI Z89.1	EN 397	EN 397	Z89.1	EN 397	EN 397	ANSI Z89.1	ANSI Z89.1	I		
•	•	•	-	•	•	•	•	•	•	•	•	•	-	53-63 cm	490 g	7
•	•	•	-	•	•	•	•	•	•	•	•	•	•	53-63 cm	495 g	
•	•	•	•	-	-	-	•	•	•	•	•	•	-	53-63 cm	490 g	
•	•	•	•	-	-	-	•	•	•	•	•	•	•	53-63 cm	495 g	
•	•	•	-	•	•	•	•	•	•	•	•	•	-	53-63 cm	435 g	
•	•	•	-	•	•	•	•	•	•	•	•	•	•	53-63 cm	445 g	1
•	•	•	•	-	-	-	-	-	-	•	•	•	-	53-63 cm	415 g	(E
•	•	•	•	-	-	-	-	-	-	•	•	•	•	53-63 cm	425 g	


































⁽¹⁾ meets all requirements of the EN 397 standard, except the requirement for internal vertical clearance. (2) partly meeting the CE EN 397 standard. (3) lower strength (< 25 daN) limits risk of strangulation, by releasing if snagged when user is at ground level. (4) higher strength (> 50 daN) limits risk of helmet coming off in a fall.

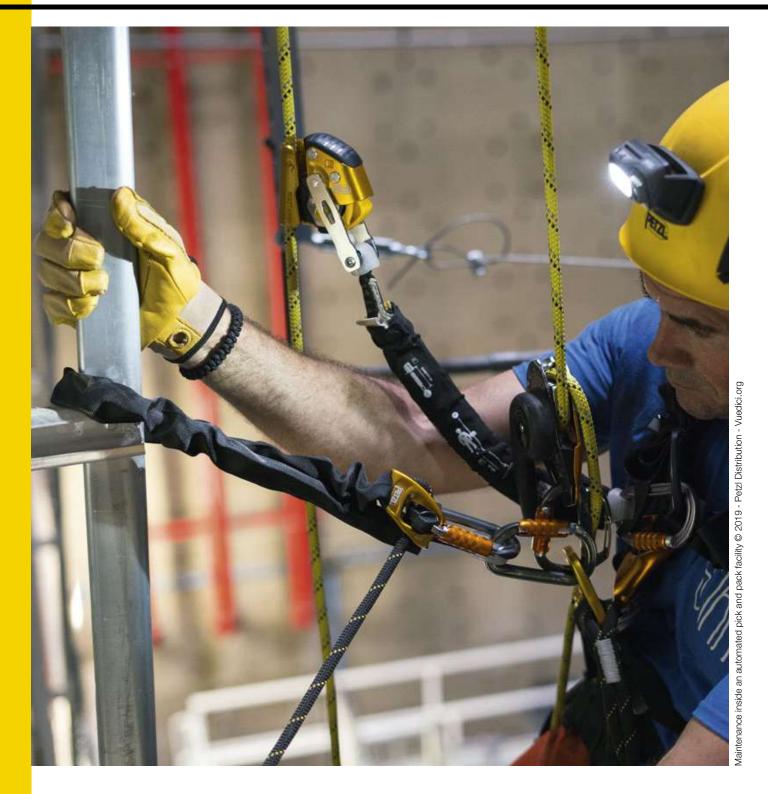

Depending on the model, the ends of Petzl lanyards are equipped with plastic sheaths, or with STRINGs. These items help keep the connector positioned on the major axis, and facilitate clipping. They also protect the ends from abrasion due to repeated rubbing.






Plastic sheath


STRING



General purpose lanyards

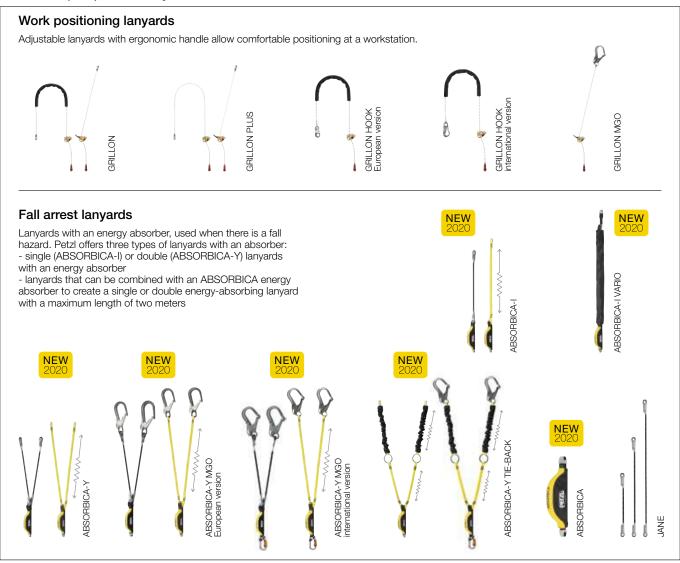

Specialized lanyards

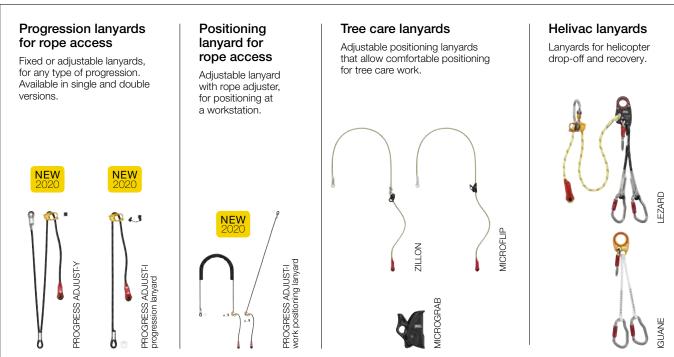



































Positioning lanyards allow the user to position him/herself precisely at a workstation, with feet supported on the structure. They can adapt to different anchoring configurations.

Versatile



Double mode use

The GRILLON lanyard can be used in double mode (on the harness side attachment points) when the user works with weight on his/her feet. This type of attachment ensures better load distribution on the belt. The user precisely adjusts his/her position by pressing on the lanyard's pivoting cam.



Single mode use

When the anchor is located above the user, the GRILLON lanyard is connected to the harness ventral attachment point, so that the load is comfortably distributed between the belt and leg loops. The user adjusts his/her position by operating the handle, while holding the free end of the lanyard.

· Easy handling



Sewn terminations with plastic sheaths

Sewn terminations increase strength (compared to a knotted termination) while reducing bulk. These plastic sheaths protect the stitching from abrasion and facilitate handling by holding the connector in position.

· Differentiation of lanyard lengths



Lanyard length is immediately identified by a color-coded label at the connector end.

Petzl Custom service for work positioning lanyards





CUSTOM

Petzl Custom service allows you to choose:

- type of lanyard: standard or high-strength rope
- lanyard color
- lanyard length
- type of lanyard-end connectors and harness connector

The assembly of various components of your choice offers a ready-made solution specific to the user.

Without connector



GRILLON lanyards are sold without connectors, so that they can be combined with any type of connector, depending on the user's requirements.

With HOOK connector



GRILLON HOOK lanyards are equipped with a HOOK auto-locking connector, ideal for connections using the harness side attachment points.

With MGO connector



GRILLON lanyards, in combination with an MGO auto-locking connector, are ideal for connection to metal structures or to large-diameter cables and bars.





GRILLON

Adjustable lanyard for work positioning

The GRILLON adjustable lanyard is used to make work positioning systems, to complement a fall-arrest system. Its length can be very easily and precisely adjusted as necessary for comfortable positioning at the workstation. Depending on the configuration, it can be used in single or double mode. GRILLON is available in seven lengths (2, 3, 4, 5, 10, 15 and 20 m), and also in black. It is certified to North American, European and Russian standards.









GRILLON PLUS

GRILLON MGO

Adjustable work positioning lanyard with high abrasion resistance

The GRILLON PLUS lanyard is used to make work positioning systems, to complement a fall-arrest system. Its length can be very easily and precisely adjusted as necessary for comfortable positioning at the workstation. The aramid fiber rope provides excellent abrasion resistance. Depending on the configuration, it can be used in single or double mode. GRILLON PLUS is available in two lengths: 2 and 3 m, and is certified to North American, European and Russian standards.







GRILLON HOOK European version

Adjustable work positioning lanyard with HOOK connector

The GRILLON HOOK adjustable lanyard is used to make work positioning systems, to complement a fall-arrest system. Its length can be very easily and precisely adjusted as necessary for comfortable positioning at the workstation. Its HOOK connector is ideal for using the lanyard in double mode on the harness side attachment points. GRILLON HOOK European version is available in four lengths (2, 3, 4 and 5 m) and is certified to European and Russian standards.





GRILLON HOOK international version

Adjustable work positioning lanyard with HOOK connector

Adjustable work positioning lanyard with MGO connector

The GRILLON MGO lanyard is used to make work positioning systems, to complement a all-arrest system. Its length can be very easily and precisely adjusted as necessary for comfortable positioning at the workstation. Connector with large gate opening is ideal for connection to metal structures or to large-diameter cables and bars. GRILLON MGO is available in two lengths: 2 and 3 m, and is certified to North American and European standards.

The GRILLON HOOK adjustable lanyard is used to make work positioning systems, to complement a fall-arrest system. Its length can be very easily and precisely adjusted as necessary for comfortable positioning at the workstation. Its HOOK connector is ideal for using the lanyard in double mode on the harness side attachment points. GRILLON HOOK international version is available in four lengths (2, 3, 4 and 5 m) and is certified to North American and European


































These lanyards are used when there is a fall hazard and are connected to the sternal or dorsal attachment point on the harness. The integrated absorber provides energy absorption in a fall and thus limits the impact force on the user.

Progressive energy absorption adapted to the user's weight



In case of a fall, the tearing of the energy absorber webbing limits the impact force on the user. The lanyards are designed for users who weigh between 50 and 130 kg. The progressive tearing of the webbing reduces the deceleration on lightweight users.

Compact and abrasion resistant energy absorber



The energy absorber is very compact, to avoid hindering the user's movements, or interfering with handling. A durable fabric pouch helps protect the energy absorber from abrasion and potential contaminants.

· Different connectors depending on the type of structure



MGO or MGO OPEN large-opening connectors

MGO and MGO OPEN connectors allow for connection to metal structures or to large-diameter cables and bars. Lanyards without connectors can be equipped with MGO OPEN 60 or 110 connectors that can be re-used if the lanyard is damaged.



Classic connectors


Lanyards without connectors can be equipped with classic aluminum (OK, Am'D and Bm'D) or steel connectors (OXAN TRIACT-LOCK). They enable connection to lifelines or to single anchor points.

· Available in several lengths, with or without a connector

ABSORBICA lanyards are available in two lengths:


- 80 cm of rope
- 150 cm of elasticized webbing, to avoid hindering progression
 They are available with or without a connector, according to user needs.


For progression on a lifeline without passing intermediate anchors



ABSORBICA-I single lanyards are designed especially for protection on a horizontal lifeline or on an elevated platform.

For progression on a vertical structure or a lifeline, and when passing intermediate anchors





The ABSORBICA-Y lanyards with two arms allow for continuous protection, by successively detaching and re-attaching the two arms.





ABSORBICA-I

Single lanyard with integrated energy absorber

ABSORBICA-I is a single lanyard with compact energy absorber designed for progression on a horizontal lifeline (rope or cable) or on an elevated platform, without passing intermediate anchors. It has several installation options on the harness and can be used with different types of connectors. It is available in two lengths: 80 or 150 cm versions (without connectors). The 150 cm version has an elasticized arm, to avoid hindering progression. Depending on the connectors used, ABSORBICA-I is certified to American, European and Russian standards.

ABSORBICA-I VARIO

Adjustable single lanyard with integrated energy absorber

ABSORBICA-I VARIO is an adjustable single lanyard with compact energy absorber designed for progression on a horizontal lifeline (rope or cable) or on an elevated platform, without passing intermediate anchors. It features the VARIO adjustment system, allowing the lanyard length to be adjusted in order to reduce potential fall height. Depending on the connectors used, ABSORBICA-I VARIO is certified to American, European and Russian standards.



ABSORBICA-Y

Double lanyard with integrated energy absorber

ABSORBICA-Y is a double lanyard with compact energy absorber, designed for progression on a vertical structure or a horizontal lifeline, and when passing intermediate anchors. It has several installation options on the harness and can be used with different types of connectors. It is available in two lengths: 80 or 150 cm versions (without connectors). The 150 cm version has elasticized arms, to avoid hindering progression. Depending on the connectors used, the ABSORBICA-Y is certified to American, European, and Russian standards.



Double lanyard with integrated energy absorber and MGO connectors

ABSORBICA-Y MGO is a double lanyard with compact energy absorber, designed for progression on a vertical structure or a horizontal lifeline, and when passing intermediate anchors. It is available in two lengths: 80 or 150 cm versions (without connectors). The 150 cm version has elasticized arms, to avoid hindering progression. With two MGO large-opening connectors, it is certified to European and Russian standards.



Double lanyard with integrated energy absorber and MGO connectors

ABSORBICA-Y MGO is a double lanyard with compact energy absorber, designed for progression on a vertical structure or a horizontal lifeline, and when passing intermediate anchors. It is available in two lengths: 80 or 150 cm versions (without connectors). The 150 cm version has elasticized arms, to avoid hindering progression. Equipped with two large-opening MGO connectors and a Bm'D connector with a CAPTIV positioning bar, it is certified to American, European and Russian standards.



ABSORBICA-Y TIE-BACK

Double lanyard with integrated intermediate tie-back rings and energy absorber

The ABSORBICA-Y TIE-BACK is a double lanyard with integrated intermediate tie-back rings and compact energy absorber. It is designed for vertical progression on very large structures and when passing intermediate anchor points. The TIE-BACK system allows the lanyard end to be reconnected to the intermediate tie-back ring to fit around structures with a very large cross-section. The arms are elasticized to avoid hindering progression. It is available with or without connectors and is certified to American, European and Russian standards.



































Fall arrest lanyards - assembly required



MGO OPEN

Auto-locking directional connector with large gate opening, and a gated connection point

See page 105 for details on the MGO OPEN 60 connector.

JANE

Non-adjustable dynamic rope lanyard

Non-adjustable dynamic rope lanyard combines with an ABSORBICA energy absorber to create an I or Y energy-absorbing lanyard that helps hold the connector in position, with abrasion protection for the ends.

RING OPEN

Multidirectional gated ring

See page 106 for details on the RING OPEN gated ring.

ABSORBICA

Compact energy absorber

ABSORBICA is a compact energy absorber, for use in combination with a JANE lanyard to make a fall arrest lanyard. Equipped with tear-webbing inside a pouch that opens on each end, the absorber is protected from abrasion, while allowing for regular inspection. It has two options for installation on the harness, according to the frequency of manipulation.

Progression lanyards for rope access



PROGRESS ADJUST-Y

Double adjustable progression lanyard

PROGRESS ADJUST-Y is a double adjustable progression lanyard that enables continuous connection for all types of progression (rope ascent, moving along a traverse line...). Thanks to the ADJUST rope adjuster, the length of the adjustable arm can be quickly and easily adjusted. The TANGA accessory and the plastic sheath help hold the connectors in a good position for easy clipping.

PROGRESS ADJUST-I

Single adjustable progression lanyard

PROGRESS ADJUST-I is a single adjustable progression lanyard that allows, when combined with another lanyard, continuous connection for all types of progression (rope ascent, moving along a traverse line...). Thanks to the ADJUST rope adjuster, the length can be quickly and easily adjusted. Reversible, the ADJUST rope adjuster can be placed on the anchor or on the harness ventral attachment point. The CAPTIV ADJUST and STUART accessories help hold the connectors in a good position for easy clipping.



PROGRESS ADJUST lanyards adjust very quickly and precisely, thanks to the ADJUST rope adjuster, which releases with a simple turn and handles easily, thanks to its ergonomic shape.



PROGRESS

Progression lanyard

The PROGRESS progression lanyard allows continuous connection during rope ascents. The connectors are held in the correct position for ease of clipping.



Positioning lanyard for rope access



Tree care lanyards

PROGRESS ADJUST-I

Adjustable positioning lanyard

When combined with a fall-arrest device, the PROGRESS ADJUST-I adjustable positioning lanyard enables comfortable positioning at a workstation when the user has support for his/her feet. Thanks to the ADJUST rope adjuster, the length can be quickly and easily adjusted. The CAPTIV ADJUST and STUART accessories help hold the connectors in a good position for easy clipping. Depending on the configuration, it can be used in single or double mode. The PROGRESS ADJUST-I positioning lanyard is available in three lengths (2, 3 and 5 m).

















































Replacement cam-loaded rope clamp for MICROFLIP Replacement rope clamp for MICROFLIP, featuring an ergonomic cam and integrated cam spring.

ZILLON

Adjustable work positioning lanyard for tree care

The ZILLON work positioning lanyard for tree care adjusts easily with only one hand, even when loaded. It is designed for use in double mode on the harness side attachment points, or in single mode on the ventral attachment point with the hand on the free end. Yellow color for excellent visibility. ZILLON lanyard ropes are also available individually.



Easily adjusted with one hand, thanks to the progressive locking/unlocking action of the device.



Pulley mounted on sealed ball bearings allows slack to be taken up easily.





Reinforced adjustable positioning lanyard for tree care work

MICROFLIP is a reinforced adjustable lanyard designed for positioning in tree care work. Its cable core reduces the risk of severing the lanyard and facilitates moving about on the trunk. Yellow color for excellent visibility. MICROFLIP lanyard ropes are also available individually.



Helivac lanyards



LEZARD

Helivac lanyard with securing of the drop-off/recovery phases

The LEZARD lanyard is designed for helivac at altitude. It allows the drop-off/recovery phases to be secured thanks to an adjustable arm that can be instantly ejected to free the victim, the rescuer and the helicopter if the latter needs to suddenly leave its stationary position. Handling the LEZARD helivac lanyard is easy thanks to the instant identification of the color-coded attachment elements and the very quick and precise adjustment of the adjustable arm with the ADJUST rope adjuster.



IGUANE

Helivac lanyard for ground drop-off/recovery

The IGUANE lanyard is designed for ground helivac. Manipulation is easy thanks to the instant identification of the attachment elements by color coding. Lanyard available in two lengths.



The lower ends are equipped with STRING, allowing the carabiner to be held in position and protecting the webbing from wear.

Lanyard-end connectors



VERTIGO TWIST-LOCK

Carabiner for progression lanyard

See page 105 for details on the VERTIGO TWIST-LOCK carabiner.



EASHOOK OPEN

Connector with gated connection point for double lanyard and work positioning lanyard See page 105 for details on the EASHOOK OPEN carabiner.




MGO OPEN

Auto-locking directional connector with large gate opening, and a gated connection point

See page 105 for details on the MGO OPEN 60 connector.



				Lengths			Certifications	Weight
Work positioning lany	yards and la	anyards for	rope access or	tree care				
	L052AA00 / 04 / 05 / 06	01 / 02 / 03 /	2 m/3 m/4	Adjustable to m / 5 m / 10 m / 15	m / 20 m			480 - 1875 (
GRILLON	L052AA07 /	08 (black)		ustable to 2 m / 3 m	, 20		Z359.3, CSA Z259.11 (1), 358, EN 12841 type C, EAC	480 - 1875 (
GRILLON PLUS	L052EA00 /		Adiu	ustable to 2 m / 3 m		OE EIN S	556, EN 12641 type C, EAC	435 - 515 g
GRILLON HOOK	L052BA00 /		,			CE EN S	358, EN 12841 type C, EAC	635 - 875 g
European version GRILLON HOOK			- Adjustable	e to 2 m / 3 m / 4 m /	/ 5 m		Z359.3, CSA Z259.11 (1),	
international version	L052CA00 /						358, EN 12841 type C, ÉAC Z359.3, CSA Z259.11 (1),	770 - 1010 (
GRILLON MGO	L052DA00 /	01	Adjı	ustable to 2 m / 3 m			358, EN 12841 type C, EAC	1220 - 1300
NEW 2020 PROGRESS ADJUST-Y	, L044AA00			fixed arm, 65 cm, adjustable up to 95 c	:m		CE EN 358, EAC	245 g
	L044BA00		1 arm	n adjustable up to 1 n	n			175 g
NEW 2020	L044BA01		1 arm :	n adjustable up to 2 n	n	CE	EN 358, ANSI Z359.3,	300 g
PROGRESS ADJUST-I	L044BA02		1 arm	adjustable up to 3 n	n		CSA Z259.11, EAC	370 g
	L044BA03		1 arm	n adjustable up to 5 n	n			510 g
PROGRESS	L44A			short arm, 30 cm fixed arm, 65 cm			CE EN 354, EAC	150 g
ZILLON	L22A 025 / 0	040 / 055	Adjustab	ole to 2.5 m / 4 m / 5.	5 m		CE EN 358	570 - 900 g
MICROFLIP	L33 025 / 04	40 / 055	Adjustab	ole to 2.5 m / 4 m / 5.	5 m		CE EN 358, EAC	750 - 1355
MICROGRAB	B53A			-		CE EN 358 (2), EN 567, EAC, NFPA 1983 Technical Use		150 g
		Cor	nnectors	Lengths without	Length	s with	Certifications	Weight
				connectors	conne	ctors		
Fall arrest lanyards					90 - 13	30 cm		
NEW 2020	L011AA00		-	80 cm	(depending on the	he connectors)		270 g
ABSORBICA-I	L013AA01		-	150 cm	160 - 2 (depending on the			320 g
NEW 2020 ABSORBICA-I VARIO	L016AA00		-	100-150 cm	200	cm	CE EN 355 (4), ANSI Z359.13 12 feet (5), EAC	280 g
NEW 2020	L012AA00			80 cm	90 - 13 (depending on the			370 g
ABSORBICA-Y	L014AA01		-	150 cm	160 - 2 (depending on the			430 g
NEW 2020	L012CA00		Ends:	80 cm	110	cm	CE EN 355 (4),	1290 g
ABSORBICA-Y MGO European version	L014CA01	2	x MGO	150 cm	200	cm	EAC (4),	1350 g
NEW 2020	L012BA00			80 cm	110	cm	ANSI Z359.13 12 feet,	1850 g
ABSORBICA-Y MGO international version	L014BA01		Ends: GO - Bm'D	150 cm	180	cm	ANSI Z359.12, CE EN 355, EAC	1910 g
							LAO	
NEW 2020	L015AA00		-	450	160 - 2 (depending on the		CE EN 355 (4),	550 g
ABSORBICA-Y TIE-BACK	L015BA00		Ends:	150 cm	180	cm	ANSI Z359.13 12 feet (5), EAC	2030 g
	LOTOBAGO	2 x M	GO - Bm'D		100			2000 g
NEW 2020 ABSORBICA	L010AA00		-	22 cm	200	cm	CE EN 355, EAC	140 g
	L50 60		-	60 cm	-			110 g
JANE	L50 100		-	100 cm	-		CE EN 354, EAC	130 g
	L50 150		-	150 cm	-			185 g
		Cor	nnectors	L	engths		Certifications	Weight
Helivac lanyards								
	L01		GO TWIST-LOCK IGO WIRE-LOCK	2 x 35 c 1 ejectable arm	m fixed arms, , adjustable to	95 cm	CE	880 g
Helivac lanyards LEZARD	L01 L001AA00	- 1 x VERT		1 ejectable arm		95 cm	CE CE EN 354	880 g 390 g





































Mobile fall arresters

Installed on a safety rope, mobile fall arresters will lock in case of a shock load or sudden acceleration.



• For protection against falls

Mobile fall arrester can be combined (or not) with an ASAP'SORBER or ASAP'SORBER AXESS energy absorber.





• For protection against falls, with locking function

Mobile fall arrester with locking function, used with an ASAP'SORBER or ASAP'SORBER AXESS energy absorber.



Absorbers for mobile fall arresters

Energy absorbers may only be used with an ASAP or ASAP LOCK mobile fall arrester. They limit the impact force transmitted to the user in case of a fall.





Ropes for mobile fall arresters

Ropes with sewn terminations for use with ASAP or ASAP LOCK mobile fall arresters.




















Installed on a safety rope, the ASAP and ASAP LOCK mobile fall arresters connect to the harness fall-arrest attachment point. They follow the user in his or her movements, and, in case of a shock load or sudden acceleration, they lock and stop the fall.


· Constant fall protection



Integrated locking

In case of a sudden movement due to a fall, slide or uncontrolled descent, the ASAP and ASAP LOCK mobile fall arresters lock on the rope and stop the worker's fall, even if s/he grabs the device with his/her hands.

Effective in any situation



These mobile fall arresters work equally well on vertical or angled ropes, to adapt to any


· Simple to use



Rapid installation

These mobile fall arresters may be quickly and easily installed anywhere on the rope by simply retracting the locking wheel.

No user action required



The ASAP and ASAP LOCK mobile fall arresters follow the worker in all his/her movements, without the need for any manual operation. S/he can therefore focus completely on the task.

Compatible with all Petzl energy absorbers



To meet different user needs, the mobile fall arresters are compatible with all of the energy absorbers in the line: ASAP'SORBER (20 and 40) and ASAP'SORBER AXESS.

· For protection against falls

Depending on the use, the ASAP mobile fall arrester can be combined (or not) with an ASAP'SORBER energy-absorber.

· For protection against falls, with locking function

The ASAP LOCK has a locking function allowing users to reduce the potential fall distance. Additionally, it is drop-resistant when passing intermediate anchors. It is used with an ASAP'SORBER energy-absorber.













































ASAP®

Mobile fall arrester

With its unique locking system, the ASAP sets the standard in fall protection for workers at height. In normal use, the device moves freely along the rope without any manual intervention and follows the user in all his/her movements. In case of a shock load or sudden acceleration, the ASAP locks on the rope and stops the user. Depending on the use, the ASAP may also be combined with an ASAP'SORBER or ASAP'SORBER AXESS energy absorber to work at a distance from the rope.



ASAP® LOCK

Mobile fall arrester with locking function

The ASAP LOCK mobile fall arrester is designed to facilitate handling during rope ascents. In normal use, the device moves freely along the rope without any manual intervention and follows the user in all his/her movements. In case of a shock load or sudden acceleration, the fall arrester locks on the rope and stops the user. The integrated locking function allows the user to immobilize the device in order to reduce the potential fall distance. The connection arm makes the system drop-resistant when passing intermediate anchors. The ASAP LOCK is used with an ASAP'SORBER or ASAP'SORBER AXESS energy absorber to work at a distance from the rope.



Maintenance inside an automated pick and pack facility © 2019 - Petzl Distribution - Vuedici.org

Absorbers for mobile fall arresters



ASAP'SORBER

Energy absorber for ASAP or ASAP LOCK

The ASAP'SORBER energy absorber may only be used with an ASAP or ASAP LOCK mobile fall arrester. It allows the user to work at a distance from the rope, in order to protect it during certain work phases. Equipped with tear-webbing inside a pouch that opens on each end, the absorber is protected from abrasion, while allowing for regular inspection. It is available in two lengths, to provide the best balance between distance from the rope and reduced fall distance.



ASAP'SORBER AXESS

Energy absorber for ASAP or ASAP LOCK for a maximum load of 250 kg

The ASAP'SORBER AXESS energy absorber may only be used with the ASAP or ASAP LOCK mobile fall arrester. It allows the user to work at a distance from the rope, in order to protect it during certain work phases. Equipped with tear-webbing inside a pouch that opens on each end, the absorber is protected from abrasion, while allowing for regular inspection. It can be used in two-person rescue situations for a maximum load of 250 kg.

Ropes for mobile fall arresters



ASAP'AXIS 11 mm

Low stretch kernmantel rope with sewn termination and integrated energy dissipater for ASAP or ASAP LOCK

The ASAP'AXIS 11 mm low stretch kernmantel rope with sewn termination and integrated energy dissipater is designed for use with an ASAP or ASAP LOCK mobile fall arrester. The energy dissipater is integrated in the rope and meets the requirements for the European EN 353-2 standard for fall protection. The standard diameter ensures a good grip for easier handling. The EverFlex technology guarantees great flexibility and consistent performance over time. The sewn termination features the STUART accessory that helps keep the connector in position and facilitates handling. Rope available in six lengths.



RAY 12 mm

Static rope with sewn termination for ASAP or ASAP LOCK

The RAY 12 mm static rope with sewn termination is designed for use with an ASAP or ASAP LOCK mobile fall arrester. The standard diameter ensures a good grip for easier handling. It has low stretch when put under tension, allowing it to meet the requirements of the ANSI Z359.15 American fall protection standard. The sewn termination with protective sheath helps keep the connector in position and facilitates handling. Rope available in five lengths.



			Certifications	Weight
obile fall arresters				
NEW 2020 NSAP	B070AA00	a Bm'D or OXA and a RAY 12 r CE EN 12841 1 when used with An ASAP'SORE CE EN 353-2 when used with An ASAP'SORE EAC when used with	·	295 g
SAP LOCK	B071BA00	a Bm'D or OXA and a RAY 12 r CE EN 12841 1 when used with an OK TRIACT- When used with an OK TRIACT- with a sewn ter EAC when used with	type A n an ASAP'SORBER or ASAP'SORBER AXESS energy absorber, LOCK carabiner, and an EN 1891 type A, 10-13 mm rope. n an ASAP'SORBER or ASAP'SORBER AXESS energy absorber, LOCK carabiner, and an ASAP'AXIS 11 mm or AXIS 11 mm rope	425 g
		Length	Certifications	Weight
bsorbers for mobile fall a	rresters			
4				
NEW 2020	L71AA00	20 cm	ANSI Z359.13 6 feet — CE EN 355	125 g
NEW 2020 NSAP'SORBER	L71AA00	20 cm 40 cm		125 g
			- CE EN 355	
NSAP'SORBER	L71AA01	40 cm	— CE EN 355 EAC ANSI Z359.13 6 feet	145 g
NSAP'SORBER	L71AA01	40 cm	CE EN 355 EAC ANSI Z359.13 6 feet CE EN 355	145 g 205 g Weight
NEW 2020 NSAP'SORBER NXESS	L71AA01	40 cm	CE EN 355 EAC ANSI Z359.13 6 feet CE EN 355	145 g 205 g Weight
NEW 2020 NSAP'SORBER NSAP'SORBER NXESS	L71AA01 L071CB00	40 cm 40 cm	CE EN 355 EAC ANSI Z359.13 6 feet CE EN 355	145 g 205 g Weight
NEW 2020 NSAP'SORBER NXESS	L71AA01 L071CB00 ters R074DA00 R074DA01 R074DA02	40 cm 40 cm Length 10 m 20 m 30 m	CE EN 355 EAC ANSI Z359.13 6 feet CE EN 355	145 g 205 g Weight
NEW 2020 NSAP'SORBER NSAP'SORBER NSAP'SORBER NSAP'SORBER NSAP'SORBER NSAP'SORBER NSAP'SORBER	L71AA01 L071CB00 ters R074DA00 R074DA01 R074DA02 R074DA03	40 cm 40 cm Length 10 m 20 m 30 m 40 m	CE EN 355 EAC ANSI Z359.13 6 feet CE EN 355 Certifications	145 g 205 g Weight per meter
NEW 2020 ASAP'SORBER	L71AA01 L071CB00 ters R074DA00 R074DA01 R074DA02 R074DA03 R074DA04	40 cm 40 cm Length 10 m 20 m 30 m 40 m 50 m	CE EN 355 EAC ANSI Z359.13 6 feet CE EN 355 Certifications	145 g 205 g Weight per meter
NEW 2020 ASAP'SORBER	L71AA01 L071CB00 ters R074DA00 R074DA01 R074DA02 R074DA03 R074DA04 R074DA05	40 cm 40 cm Length 10 m 20 m 30 m 40 m 50 m 60 m	CE EN 355 EAC ANSI Z359.13 6 feet CE EN 355 Certifications	145 g 205 g Weight per meter
NEW 2020 ASAP'SORBER	L71AA01 L071CB00 ters R074DA00 R074DA01 R074DA02 R074DA03 R074DA04 R074DA05 R091AA00	40 cm 40 cm Length 10 m 20 m 30 m 40 m 50 m 60 m 25 ft	CE EN 355 EAC ANSI Z359.13 6 feet CE EN 355 Certifications	145 g 205 g Weight per meter
NEW 2020 NSAP'SORBER NSAP'SORBER NSAP'SORBER NSAP'SORBER NSAP'SORBER NSAP'SORBER NSAP'AXIS NSAP'AXIS NSAP'AXIS	L71AA01 L71AA01 L071CB00 ters R074DA00 R074DA01 R074DA02 R074DA03 R074DA04 R074DA05 R091AA00 R091AA01	40 cm 40 cm Length 10 m 20 m 30 m 40 m 50 m 60 m 25 ft 50 ft	CE EN 355 EAC ANSI Z359.13 6 feet CE EN 355 Certifications CE EN 1891 type A	145 g 205 g Weight per meter
NEW 2020 NSAP'SORBER NSAP'SORBER NSAP'SORBER NSAP'SORBER NSAP'SORBER NSAP'SORBER NSAP'AXIS NSAP'AXIS NSAP'AXIS	L71AA01 L071CB00 ters R074DA00 R074DA01 R074DA02 R074DA03 R074DA04 R074DA05 R091AA00	40 cm 40 cm Length 10 m 20 m 30 m 40 m 50 m 60 m 25 ft	CE EN 355 EAC ANSI Z359.13 6 feet CE EN 355 Certifications	145 g 205 g Weight per meter






































To facilitate connection and disconnection, Petzl connectors have features that simplify their use.



Avoids the risk of snagging

To ensure optimal efficiency, all Petzl carabiners use the Keylock system: the body/gate interface does not have a hook that could snag on anchors, ropes, harness gear loops...



Visual locking indicator

To facilitate equipment checks, SCREW-LOCK manual locking carabiners have a red band that is visible only when the carabiner is not locked.



Lightweight carabiners

Aluminum carabiners designed for workers at height.









Ultra-lightweight carabiners

Compact aluminum carabiners for workers at height looking to reduce weight to a minimum.







High-strength carabiners

Carabiners suitable for difficult environments, primarily used for setting up anchors and for connecting to metal structures.







NEW



Lanyard-end connectors

Connectors designed for lanyard ends.









Special carabiners

Aluminum carabiners designed for specific uses: with groups, for additional braking with a descender, and for harness fastening.













Semi-permanent connectors

Connectors designed for semi-permanent connection of equipment.











Connector positioning accessories

Accessories that keep the carabiner correctly positioned in devices and at the end of a lanyard.



















Lightweight carabiners

· Design facilitates handling



Fluid interior design


Fluid interior design limits the risk of having a catch point and facilitates rotation of the carabiner.



Optimal strength/weight ratio


The H cross-section ensures an optimal strength/weight ratio and protects the markings from abrasion.

- Multiple locking systems depending on the intensity of use:
- for frequent handling:



TRIACT-LOCK automatic system:


Unlocking is accomplished by raising, then turning the sleeve.



BALL-LOCK automatic system:

Unlocking is accomplished by pressing on the green indicator, then turning the sleeve. The green visual indicator is visible only when the gate is locked.

- for occasional handling:



SCREW-LOCK manual system:

This system is suitable for harsh environments where contaminants (mud, ice) could cause an automatic locking system to jam. The red visual indicator is visible when the carabiner is unlocked.

For connecting to equipment having a large cross-section



The OK carabiner has a symmetrical oval shape for optimal loading of devices with a large cross-section, such as pulleys, rope clamps or mobile fall arresters.

For connection to equipment such as descenders or positioning lanyards



The Am'D carabiner has an asymmetric D shape that is ideal for attaching equipment such as descenders or positioning lanyards.

· For connection of multiple items



The WILLIAM has an asymmetrical pear shape, with a large capacity for attaching multiple elements, and a large gate opening to facilitate their installation.













































Lightweight oval carabiner

The lightweight OK carabiner is made of aluminum. It has an oval shape that allows optimal loading of devices with a large cross-section, such as pulleys, rope clamps, and mobile fall arresters. Its fluid interior design and Keylock system facilitate handling. It is available in three locking systems: automatic TRIACT-LOCK or BALL-LOCK, or the manual SCREW-LOCK. OK can be used with the CAPTIV bar to promote loading of the carabiner on the major axis, to limit the risk of rotation and to keep it integrated with the device.





Am'D

Lightweight asymmetrical carabiner

The Am'D lightweight asymmetrical carabiner is made of aluminum. It has a D shape particularly suited for connection to various equipment such as descenders or positioning lanyards. Its fluid interior design and Keylock system facilitate handling. The Am'D carabiner is available in three locking systems: automatic TRIACT-LOCK or BALL-LOCK system, or the manual SCREW-LOCK system. Am'D may be used with a CAPTIV positioning bar to favor loading of the carabiner along the major axis, to limit the risk of it flipping and to keep it integrated with the device.



WILLIAM

Lightweight asymmetrical large-capacity carabiner

The lightweight WILLIAM large-capacity asymmetrical carabiner is made of aluminum. It has a pear shape that is useful for easily connecting multiple items. Its fluid interior design and Keylock system facilitate handling. The WILLIAM carabiner is available in three locking systems: automatic TRIACT-LOCK or BALL-LOCK, or the manual SCREW-LOCK. WILLIAM can be used with the CAPTIV bar to favor positioning of the carabiner along the major axis, to limit the risk of it flipping and to keep it integrated with the device.

Ultra-lightweight carabiners



Sm'D

Ultra-lightweight asymmetrical carabiner

The compact Sm'D asymmetrical aluminum carabiner is recommended for workers at height looking to reduce weight to a minimum. The D shape makes it especially suitable for attaching devices. It is available in two locking systems (automatic TRIACT-LOCK system or manual SCREW-LOCK system), or without a locking system.

High-strength carabiners



OXAN

High-strength oval carabiner

OXAN is a high-strength steel carabiner designed for use in difficult environments. The oval, symmetrical shape allows optimal loading of the carabiner when setting up anchors or connecting to metal structures. It is available in two locking systems: automatic TRIACT-LOCK system or manual SCREW-LOCK system. OXAN TRIACT-LOCK is available in European or international versions. OXAN can be used with the CAPTIV bar to favor positioning of the carabiner along the major axis, to limit the risk of it flipping and to keep it integrated with the device.



The oval, symmetrical shape allows optimal loading of the carabiner when setting up anchors.

Usage with the CAPTIV positioning bar favors loading of the carabiner along the major axis, limits flipping and keeps it attached to the device or lanyard.



VULCAN

High-strength asymmetrical carabiner with large capacity

VULCAN is a high-strength steel carabiner designed for use in harsh environments. The large-capacity asymmetrical shape is ideal for setting multiple anchors. The VULCAN carabiner is available in two locking systems: automatic TRIACT-LOCK system or manual SCREW-LOCK system. VULCAN TRIACT-LOCK is available in European or international versions. VULCAN can be used with the CAPTIV bar to promote loading of the carabiner on the major axis, to limit the risk of rotation and to keep it integrated with the device.



CAPTIV COMPATIBLE

Bm'D

Lightweight asymmetrical high-strength carabiner

The Bm'D lightweight asymmetrical carabiner is made of aluminum. It has a D shape particularly suited for connection to various equipment such as descenders or positioning lanyards. Its fluid interior design and Keylock system facilitate handling. The Bm'D carabiner has the TRIACT-LOCK automatic locking system. The sleeve is reinforced for greater front and lateral gate strength. Bm'D may be used with a CAPTIV positioning bar to promote loading of the carabiner on the major axis, to limit the risk of rotation and to keep it integrated with the device.



The sleeve is reinforced for greater front and lateral gate strength.



Lanyard-end connectors



VERTIGO TWIST-LOCK

Connector for progression lanyard

The VERTIGO TWIST-LOCK connector is designed for use on progression lanyards. The excellent grip and automatic locking system facilitate handling when passing intermediate anchors. The large opening and the Keylock system allow the connector to be easily connected. VERTIGO TWIST-LOCK may be used with a CAPTIVO positioning bar to promote loading of the carabiner on the major axis, to limit the risk of rotation and to keep it integrated with the device.





FASHOOK OPEN

Connector with gated connection point for double lanyard and work positioning

The EASHOOK OPEN connector is designed for use at the ends of a double lanyard or work positioning lanyard. The gated connection point allows for direct attachment of the connector to the lanyards If the lanyard is damaged, the connector can thus be reused. The excellent grip and automatic locking system facilitate handling when passing intermediate anchors.













MGO OPEN

Auto-locking directional connector with large gate opening, and a gated connection point

MGO OPEN is an auto-locking directional connector with a large gate opening for connection to metal structures or to large-diameter cables and bars. It has a gated connection point for attachment to different types of lanyards. If the lanyard is damaged, the connector can thus be reused. MGO OPEN is available in two versions: 60 and 110 mm.

Special carabiners





Am'D PIN-LOCK

Asymmetrical aluminum carabiner, unlocks with a tool

The Am'D PIN-LOCK asymmetrical aluminum carabiner is designed for use with groups. It secures the connection of the user, thanks to its PIN-LOCK system, which can only be opened by the operator with a special unlocking tool. Am'D PIN-LOCK may be used with a CAPTIV positioning bar to promote loading of the carabiner on the major axis, to limit the risk of rotation and to keep it integrated with the device.









FREINO Z

Carabiner with friction spur for descenders

The FREINO Z carabiner has a friction spur for adding or adjusting friction during the descent. It is easy to use and compatible with I'D S, I'D L, I'D EVAC and RIG self-braking descenders. When rotated, it makes the descender loss-proof when being transferred from the equipment loop to the ventral attachment point or anchor. The FREINO Z has the TRIACT-LOCK automatic locking system.







OMNI

Multidirectional semi-circle carabiner

Multidirectional semi-circle OMNI carabiner for fastening the FALCON ASCENT harness and for attaching a CROLL ventral rope clamp. It is available in two locking systems: automatic TRIACT-LOCK system or manual SCREW-LOCK system.











Semi-permanent connectors



RING OPEN

Multidirectional gated ring

The RING OPEN gated ring is designed for the semi-permanent connection of equipment. Its round shape ensures optimal functioning in all directions. It has a large opening that allows installation of ropes with sewn terminations.



DFI TA

Triangular steel quick link

When closed with a wrench, this steel quick link becomes a semi-permanent anchor ring.



GO

Oval steel quick link

When closed with a wrench, this steel quick link becomes a semi-permanent anchor ring.



DEMI ROND

Semi-circle aluminum alloy quick link

When closed with a wrench, this aluminum quick link is used to fasten harnesses that have two attachment points that must be joined with a connector.

Connector positioning accessories



CAPTIV

Connector positioning bar (pack of 10)

The CAPTIV positioning bar promotes loading of the carabiner on the major axis, limits the risk of rotation and keeps it integrated with the device or lanyard. CAPTIV is compatible with OK, Am'D, WILLIAM, OXAN, VULCAN, Bm'D carabiners and the ROLLCLIP A pulley carabiner.





CAPTIVO

Positioning bar for the VERTIGO TWIST-LOCK connector (pack of 10)

The CAPTIVO positioning bar secures the connector to the lanyard, promotes loading of the connector on the major axis and limits the risk of rotation. CAPTIVO is only compatible with the VERTIGO TWIST-LOCK connector.





CAPTIV ADJUST

Carabiner positioning bar combined with an ADJUST rope adjuster

The CAPTIV ADJUST positioning bar promotes loading of the carabiner on the major axis and helps hold the ADJUST rope adjuster in the proper position to reduce the risk of accidental release. It helps keep the lanyard and rope adjuster integrated with the carabiner, reducing the risk of losing them. CAPTIV ADJUST is compatible with OK, Am'D, Bm'D and OXAN carabiners.





STUART

Connector positioning accessory (pack of 10)

STUART helps keep the connector in the correct position and facilitates clipping. It is compatible with most auto-locking connectors.



TANGA

Connector positioning ring (pack of 10)

The TANGA positioning ring helps hold the connector in the correct position.





STRING

Accessory for maintaining connector orientation and protecting carabiner attachment loop (pack of 10)

STRING helps maintain the proper orientation of the connector and protects the carabiner attachment loop from wear. It is available in two sizes.



		Locking	References		Image: Control of the	◆ () •	\$	Certifications	Weight
Lightweight	t cara	biners							
		TRIACT-LOCK	M33A TL / TLN (1)	22 mm					75 g
OK	0	BALL-LOCK	M33A BL	23 mm	25 kN	8 kN	7 kN	CE EN 362, EAC	75 g
		SCREW-LOCK	M33A SL / SLN (1)	22 mm					70 g
		TRIACT-LOCK	M34A TL / TLN (1) / TLY (2)	24 mm					75 g
Am'D		BALL-LOCK	M34A BL / BLY (2)	25 mm	27 kN	8 kN	7 kN	CE EN 362, EAC,	75 g
		SCREW-LOCK	M34A SL / SLN (1)	25 mm				NFPA 1983 Technical Use	70 g
		TRIACT-LOCK	M36A TL / TLN (1) / TLY (2)	27 mm		8 kN			90 g
WILLIAM		BALL-LOCK	M36A BL / BLY (2)	27 mm	27 kN		8 kN	CE EN 362, EAC,	90 g
		SCREW-LOCK	M36A SL / SLN (1)	28 mm				NFPA 1983 Technical Use	85 g
Ultra-lightw	veiaht	carabiners							
J		TRIACT-LOCK	M39A TL / TLN (1)	18 mm				CE EN 362, CE EN 12275 type B, EAC	55 g
Sm'D	ก	SCREW-LOCK	M39A SL / SLN (1)	20 mm	23 kN	8 kN	7 kN	CE EN 362, CE EN 12275 type B, EAC	45 g
	v	Non-locking	M39A S / SN (1)	23 mm				CE EN 12275 type B	40 g
High-streng	ath oc	arabinara -	()						
nign-streng	jiii Ga	TRIACT-LOCK	M72A TL	22 mm				CE EN 362, EAC,	195 g
OXAN	0	European version TRIACT-LOCK international version	M72A TLA / TLN (1)	20 mm	38 kN	16 kN	15 kN	NFPA 1983 Technical Use CE EN 362, EAC, ANSI Z359.12, NFPA 1983 Technical Use, CSA Z259.12	230 g
		SCREW-LOCK	M72A SL / SLN (1)	22 mm				CE EN 362, EAC, NFPA 1983 Technical Use	185 g
		TRIACT-LOCK European version	M073BA00	28 mm				CE EN 362, EAC, NFPA 1983 General Use	245 g
NEW 2020 VULCAN		TRIACT-LOCK international version	M073CA00 / 01 (1)	26 mm	48 kN	16 kN	18 kN	CE EN 362, EAC, ANSI Z359.12, NFPA 1983 General Use, CSA Z259.12	265 g
1020/ 1		SCREW-LOCK	M073AA00 / 01 (1)	29 mm				CE EN 362, EAC, NFPA 1983 General Use	235 g
Bm'D	1	TRIACT-LOCK	M032AA00 / 01 (1)	18 mm	32 kN	16 kN	10 kN	CE EN 362, EAC, ANSI Z359.12, NFPA 1983 Technical Use, CSA Z259.12	105 g
Lanyard-en	d cor	nnectors							
VERTIGO TWIST-LOCK	0	TWIST-LOCK	M40A RLA	25 mm	25 kN	10 kN	8 kN	CE EN 362	100 g
EASHOOK OPEN	8	Automatic	M043AA00 / 01 (1)	25 mm	25 kN	-	10 kN	CE EN 362, EAC	160 g
MGO OPEN 60	Q	Automatic	MGOO 60	63 mm	00.111		00.111	05 511000 510	490 g
MGO (NEW 2020) OPEN 110	Q	Automatic	M080AA00	110 mm	23 kN	-	23 kN	CE EN 362, EAC	930 g
Special car	abine	rs							
Am'D PIN-LOCK	0	PIN-LOCK	M34A PL (x 1) M34AB PL (x 10)	25 mm	27 kN	8 kN	7 kN	CE EN 362, CE EN 12275, EAC	80 g
NEW 2020 FREINO Z		TRIACT-LOCK	M042BA00	18 mm	23 kN	8 kN	8 kN	CE EN 362, NFPA 1983 Technical Use, EAC	75 g
OMNI		TRIACT-LOCK	M37 TL / M37TLN	22 mm	20 kN	15 kN	7 kN	CE EN 362	90 g
	(<u> </u>	SCREW-LOCK	M37 SL / M37SLN	22 111111	20 KIN	13 KIN	/ KIN	OL LIN 302	85 g
Semi-perma	anent	connectors							
RING OPEN	0	Gated ring	P28	11 mm	23 kN	23 kN	-	CE EN 362	70 g
DELTA	\cap	Quick link	P11	12 mm					150 g
DELTA		Quick link	P11 8, P11 8B, P11 8BN (1)	10 mm	05	101		05 511 000 1	85/95 g
GO	0	Quick link	P15	16 mm	25 kN	10 kN	-	CE EN 362 type Q	60 g
DEMI ROND		Quick link	P18	10 mm					55 g

⁽¹⁾ Black connectors (2) Gold connectors


































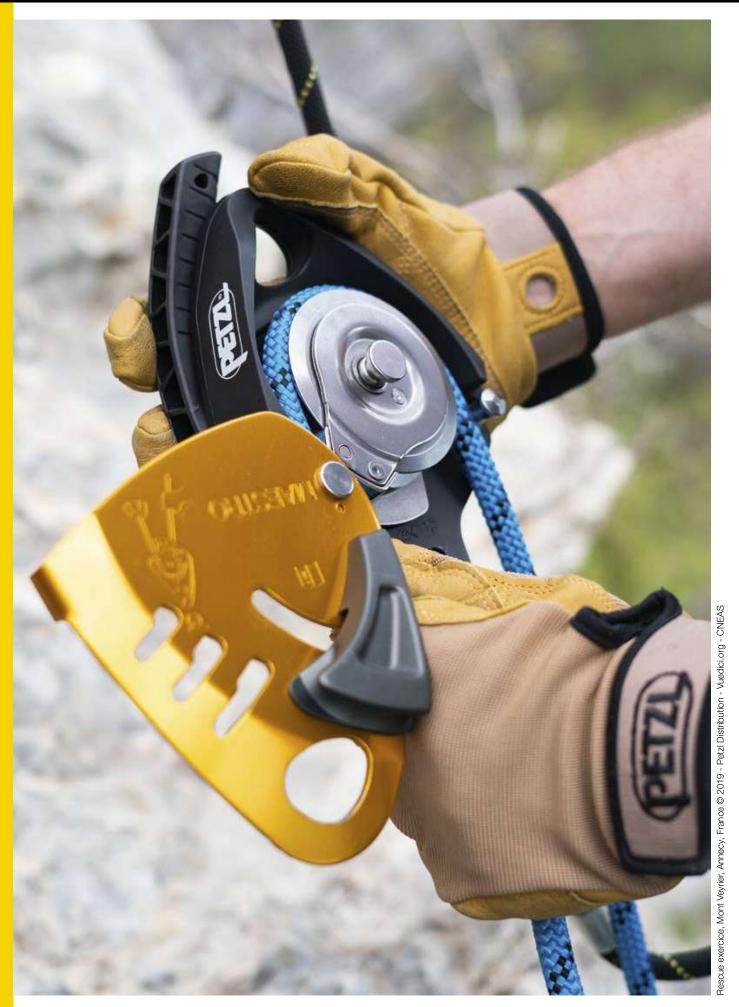



Self-braking descenders

Self-braking descenders with ergonomic handle and AUTO-LOCK system allow a comfortably controlled descent and easy positioning at the workstation. These devices are designed for work at height, rope access, and technical rescue and evacuation.



SQ











Open auxiliary brake



Closed auxiliary brake



Descenders for technical rescue

Descenders with integrated progress-capture pulley and AUTO-LOCK system to facilitate lowering and hauling of heavy loads.











Mechanical Prusiks allow the user to move around efficiently in a tree while benefiting from the handling of a classic Prusik pulley system.



JGZAG.










KNEE ASCENT CLIP







Descenders with a simple design, using the friction between the rope and the device to brake a descent. The speed of the descent is regulated by varying the grip on the free end of the rope.



HUT







Personal escape system

Rescue device that allows a single person to get him/herself out of a building or structure in case of an emergency. It has a multi-purpose anchor hook adapted for locations where the possibility of finding an anchor point is uncertain.












Self-braking descenders

Easy to use, self-braking descenders adapt to any situation encountered during work at height, rope access work, or technical rescue: descending, work positioning, short rope ascents, belaying with climbing techniques.

· Easy to use



AUTO-LOCK system

The AUTO-LOCK system allows users to easily position themselves at a workstation without having to manipulate the handle or tie off the device: as soon as the user releases the handle, the rope is automatically locked in the device.



Installing the rope

The device has a safety gate on the moving side plate that allows the rope to be installed easily while the device remains connected to the harness.



Comfortable, controlled descent

The ergonomic handle allows unlocking the rope and comfortably controlling the descent. Two descent modes are possible: on the side plate or in the V-shaped friction channel

Versatile




Self-braking descenders are versatile and can be used for both descents and short rope ascents.

• Wear resistance



The stainless steel wear plate improves durability by reinforcing the rope friction zone.

• With anti-panic function and anti-error catch



Designed for work at height, rope access, and technical rescue and evacuation, these devices are equipped with an anti-panic function and an anti-error catch, limiting the risk of an accident due to user error. They are also compatible with auxiliary brakes, in order to increase the braking friction for descents with heavy loads.

· Compact and lightweight



The RIG descender is compact and lightweight, and designed for experienced rope access workers.





I'D® S

Self-braking descender with anti-panic function for work at height and rope access work

The self-braking I'D S descender is primarily designed for work at height and rope access work. It has an ergonomic handle that allows comfortable descent control. The integrated anti-panic function and anti-error catch limit the risk of an accident due to user error. The AUTO-LOCK system allows users to easily position themselves at the workstation without having to manipulate the handle or tie off the device. Once locked, the rope can be taken up without having to manipulate the handle. The safety gate allows the rope to be installed with the device remaining connected to the harness. I'D S is compatible with 10 to 11.5 mm ropes and allows handling of loads up to 250 kg.







Self-braking descender with anti-panic function for rescue

The I'D L self-braking descender is primarily designed for rescue. It has an ergonomic handle that allows comfortable descent control. The integrated anti-panic function and anti-error catch limit the risk of an accident due to user error. The AUTO-LOCK system allows users to position themselves without having to manipulate the handle or tie off the device. Once locked, the rope can be taken up without having to manipulate the handle. The safety gate allows the rope to be installed with the device remaining connected to the harness. I'D L is compatible with 12.5 to 13 mm ropes and allows handling of loads up to 280 kg.







I'D® EVAC

Self-braking descender with anti-panic function for lowering from an anchor

The I'D EVAC self-braking descender is primarily designed for lowering from an anchor. The ergonomic handle is specifically oriented for managing a load from the anchor and offers comfortable descent control. The integrated anti-panic function and anti-error catch limit the risk of an accident due to user error. The AUTO-LOCK system allows the rope to be automatically locked without having to manipulate the handle or tie off the device. Once locked, the rope can be taken up without having to manipulate the handle. The safety gate allows the rope to be installed with the device remaining connected to the anchor. I'D EVAC is compatible with 10 to 11.5 mm ropes and allows handling of loads up to 250 kg.



Accessories

Open auxiliary brake for l'D®

Open auxiliary brake for I'D S, I'D L and I'D EVAC self-braking descenders

The open auxiliary brake is designed for I'D self-braking descenders. It is used to add friction depending on the load and rope diameter, and allows the rope to be inserted or removed at any time.





Closed auxiliary brake for l'D®

Closed auxiliary brake for I'D S, I'D L and I'D EVAC self-braking descenders

The closed auxiliary brake is designed for I'D self-braking descenders. It is used to add friction depending on the load and rope diameter and provides a constant redirect of the rope.





RIG

Compact self-braking descender for rope access, designed for experienced users

RIG is a compact self-braking descender for rope access, designed for experienced users. It has an ergonomic handle that allows comfortable descent control. The AUTO-LOCK system allows users to easily position themselves at the workstation without having to manipulate the handle or tie off the device. Once locked, the rope can be taken up without having to manipulate the handle. The safety gate allows the rope to be installed with the device remaining connected to the harness.







Descenders for technical rescue

These descenders offer the versatility required for technical rescue operations: descent, hauling, handling heavy loads, use in the primary system or in a back-up belay...

MAESTRO S

Ø 10.5 to 11.5 mm



· Easy rope installation



Rope installation is quick and easy, thanks to the markings on the device.

· Comfortable, controlled descent, even with heavy loads



The ergonomic handle and integrated braking allow for comfortably controlled




The faceted sheave creates additional friction zones for the rope and thus provides extra friction for lowering heavy loads.

MAESTRO L

Ø 12.5 to 13 mm




· Excellent hauling efficiency



The integrated progress-capture pulley with very large diameter sheave mounted on sealed ball bearings rotates in only one direction for excellent hauling efficiency. The lower connection point can be used to create different types of hauling systems.

AUTO-LOCK system: automatically locks the rope





The AUTO-LOCK system allows automatic locking of the rope when the handle is not in use. Once locked, the rope can be taken up without having to manipulate the handle.































MAESTRO® S

Descender with integrated progress-capture pulley for loads up to 250 kg, compatible with 10.5 to 11.5 mm ropes

MAESTRO S is a descender designed for technical rescue operations. It facilitates manipulation of heavy loads, for lowering or hauling, and may be used in both the primary system or in a back-up belay. This versatility allows rescuers to adapt to any situation they may encounter on the rescue scene. The ergonomic handle and integrated braking allow for comfortably controlled descent. Shifting from lowering position to hauling position is immediate, without the need to transfer the load. The integrated progress-capture pulley has a large diameter sheave mounted on sealed ball bearings, ensuring excellent hauling efficiency. The AUTO-LOCK system automatically locks the rope when the handle is not in use. Once locked, the rope can be taken up without having to manipulate the handle. The MAESTRO S descender is compatible with 10.5 to 11.5 mm ropes and allows handling of loads up to 250 kg.



MAESTRO® L

Descender with integrated progress-capture pulley for loads up to 280 kg, compatible with 12.5 to 13 mm ropes

MAESTRO L is a descender designed for technical rescue operations. It facilitates manipulation of heavy loads, for lowering or hauling, and may be used in both the primary system or in a back-up belay. This versatility allows rescuers to adapt to any situation they may encounter on the rescue scene. The ergonomic handle and integrated braking allow for comfortably controlled descent. Shifting from lowering position to hauling position is immediate, without the need to transfer the load. The integrated progress-capture pulley has a large diameter sheave mounted on sealed ball bearings, ensuring excellent hauling efficiency. The AUTO-LOCK system automatically locks the rope when the handle is not in use. Once locked, the rope can be taken up without having to manipulate the handle. The MAESTRO L descender is compatible with 12.5 to 13 mm ropes and allows handling of loads up to 280 kg.

Mechanical Prusiks for tree care

Mechanical Prusiks allow arborists to optimize their movement within a tree. They are user-friendly and intuitive to use. To meet a variety of needs, they can be used on doubled rope and single rope.

· Intuitive to use



The technique is identical to that of a classic Prusik pulley system, offering immediate usability. The device locks automatically once the friction chain is extended.

· For efficient movement



Smooth, precise rope feed

The release lever is mounted on a spring, for great precision when moving around. Adjusting the pressure on this lever controls the speed of movement.



Slack easily taken up

The pulley is mounted on sealed ball bearings to allow the slack to be taken up easily when moving around. The widely spaced side plates also contribute to smooth rope glide.

Versatile



Use on doubled ropes

ZIGZAG and ZIGZAG PLUS allow use on doubled ropes.



Use on a single rope

They can also be used on a single rope, thanks to the CHICANE accessory, which offers more friction on the descent, and the KNEE ASCENT assemblies, which facilitate ascents.

Standard version



The lower attachment hole is fixed to ensure alignment of the device with the axis of the worker and to optimize grip.

· Version with high-efficiency swivel



The lower attachment hole with high-efficiency swivel ensures stable and correct positioning of the mechanical Prusik and optimal rope glide through the device.









ZIGZAG®

Mechanical Prusik for tree care

The ZIGZAG mechanical Prusik allows the user to move around efficiently in a tree using classic Prusik pulley system technique. The friction chain provides precision and fluidity when moving around. The pulley is mounted on sealed ball bearings to allow the slack to be taken up easily. Can be used on either doubled ropes or a single rope, providing great versatility. The lower attachment hole is fixed to ensure alignment of the device with the axis of the worker and to optimize grip.















ZIGZAG® PLUS

Mechanical Prusik with high-efficiency swivel, for tree care

The ZIGZAG PLUS mechanical Prusik allows the user to move around efficiently in a tree using classic Prusik pulley system technique. The friction chain provides precision and fluidity when moving around. The pulley is mounted on sealed ball bearings to allow the slack to be taken up easily. Can be used on either doubled ropes or a single rope, providing great versatility. The lower attachment hole with highefficiency swivel ensures stable and correct positioning of the mechanical Prusik and optimal rope glide through the device.



Accessories



Auxiliary brake for mechanical Prusik on single ropes, for tree care

The CHICANE auxiliary braking device allows ZIGZAG and ZIGZAG PLUS mechanical Prusiks to be used on single ropes. It provides continuous additional friction on descents. The excellent compatibility of the CHICANE and mechanical Prusik as an assembled unit ensures smooth rope glide through the brake during ascents. The ergonomic handle provides excellent grip and facilitates movement while limb walking. Thanks to the openable side plate, installation is guick and easy.



KNEE ASCENT LOOP

Knee ascender assembly with foot loop to facilitate ascents on a single rope,

The KNEE ASCENT LOOP assembly facilitates the arborist's ascent when using the ZIGZAG or ZIGZAG PLUS mechanical Prusik on a single rope. It contains an upper strap, a CROLL L rope clamp, a lower strap with foot loop and an XS size TOOLBAG tool pouch. The system is entirely adjustable and adapts to all shapes and sizes. All components are available separately.




KNEE ASCENT CLIP

Knee ascender assembly with connector for boot, facilitating single rope ascents,

The KNEE ASCENT CLIP assembly facilitates the arborist's ascent when using the ZIGZAG or ZIGZAG PLUS mechanical Prusik on a single rope. It contains an upper strap, a CROLL L rope clamp, a lower strap with connector that attaches to the sewn webbing on the top of the arborist's boot, and an XS size TOOLBAG tool pouch. The system is entirely adjustable and adapts to all shapes and sizes. All components are available separately.





Standard descenders





HUIT

Figure-8 descender

Figure-8 descender, compact and lightweight. Square shape helps reduce rope twist.

RACK

Variable friction descender with brake bars

The design and configuration of the RACK bars make it easy to set up and insert the rope. Compact and lightweight, the device allows the user to adjust the amount of friction during the descent, to adapt to changing conditions.


Personal escape system



EXO® AP HOOK

Personal escape system with anchor hook

EXO AP HOOK is a personal escape system with HOOK anchor hook adapted for locations where the possibility of finding an anchor point is uncertain. It has a self-braking system with anti-panic function for quickly moving horizontally, climbing through a window and controlling and stopping a descent. If the user pulls too hard on the handle, the anti-panic function brakes and stops the descent automatically. EXO AP HOOK also includes a rope that resists wear and high temperatures, an Am'D connector with CAPTIV positioning bar, as well as a bag for transporting and attaching the system directly to the harness. Other rope lengths and other types of connectors (EASHOOK...) available by special order.



If the user pulls too hard on the handle, the anti-panic function brakes and stops the descent automatically.



The anchor hook may be used around a structure, fixed with a locking hitch.





CLISTOM

Petzl Custom service allows you to choose:

- type of rope: standard
- or high-strength rope
- rope color
- rope length
- type of rope-end connectors and harness connector

The assembly of various components of your choice offers a ready-made solution specific to the user, delivered in a transport pouch or bag adapted to the length of the rope.

Because of the unique shape of the anchor hook, special Petzl training for the EXO AP HOOK is mandatory.



		Certifications	Rope diameter compatibility	Maximum working load	Weight
Self-braking descenders					
I'D S	D020AA00 (yellow) D020AA01 (black)	EN 341 type 2 class A (1), CE EN 12841 type C (2), CE EN 15151-1 (3), ANSI Z359.4 (4), NFPA 1983 Technical Use (5), EAC	10 to 11.5 mm	Descending a heavy load up to 250 kg	600 g
I'D L	D020BA00 (red) D020BA01 (black)	EN 341 type 2 class A (6), CE EN 12841 type C (7), ANSI Z359.4 (8), NFPA 1983 General Use (9), EAC	12.5 to 13 mm	Descending a heavy load up to 280 kg	600 g
I'D EVAC	D020CA00 (yellow) D020CA01 (black)	EN 341 type 2 class A (1), CE EN 12841 type C (2), ANSI Z359.4 (4), NFPA 1983 Technical Use (5), EAC	10 to 11.5 mm	Descending a heavy load up to 250 kg	615 g
RIG	D021AA00 (yellow) D021AA01 (black)	CE EN 12841 type C, EN 341 type 2 class A, CE EN 15151-1 (3), NFPA 1983 Technical Use, EAC	10 to 11.5 mm	Descending a heavy load up to 200 kg	400 g
Open auxiliary brake for I'D	D020DA00	-	-	-	20 g
Closed auxiliary brake for I'D	D020EA00	-	-	-	20 g
Rescue descenders					
MAESTRO S	D024AA00	CE (10), EN 341 type 2 class A, NFPA 1983 Technical Use, EAC	10.5 to 11.5 mm	Descending a heavy load up to 250 kg	1100 g
NEW 2020 MAESTRO L	D024BA00	CE (10), EN 341 type 2 class A, NFPA 1983 General Use, EAC	12.5 to 13 mm	Descending a heavy load up to 280 kg	1100 g
Mechanical Prusiks for tre	e care				
ZIGZAG	D022AA00	CE	11.5 to 13 mm	140 kg	365 g
ZIGZAG PLUS	D022BA00	CE	11.5 to 13 mm	140 kg	425 g
CHICANE	D022CA00	CE (with ZIGZAG or ZIGZAG PLUS mechanical Prusik)	11.5 to 13 mm	140 kg	255 g
KNEE ASCENT LOOP	D022DA00	-	11.5 to 13 mm	-	280 g
KNEE ASCENT CLIP	D022EA00	-	11.5 to 13 mm		285 g
Standard descenders					
HUIT 8	D02	-	8 to 13 mm (single and double rope)	100 kg	100 g
RACK	D11	-	9 to 13 mm (single rope) 8 to 11 mm (double rope)	100 kg	470 g
Personal escape system					
EXO AP HOOK	D30AB 015	NFPA 1983 Escape Use	7.5 mm (EXO rope only)	140 kg	1470 g






































⁽¹⁾ EN 341 type 2 class A when used with a PARALLEL 10.5 mm or AXIS 11 mm rope (2) EN 12841 type C when used with a 10 to 11.5 mm EN 1891 A rope (3) EN 15151-1 when used with a 10 to 11 mm rope (4) ANSI Z359.4 when used with a 10 to 11.5 mm rope (5) NFPA 1983 Technical Use when used with a 10 to 11.5 mm rope (6) EN 341 type 2 class A when used with a VECTOR 12.5 mm rope

⁽⁷⁾ EN 12841 type C when used with a 12.5 to 13 mm EN 1891 A rope (8) ANSI Z359.4 when used with a 12.5 to 13 mm rope (9) NFPA 1983 Technical Use when used with a 12.5 to 13 mm rope (10) CE based on the requirements of EN 12278, EN 567, EN 12841 type B and EN 15151 standards (more information in the Instructions for Use and in technical tips at www.petzl.com)

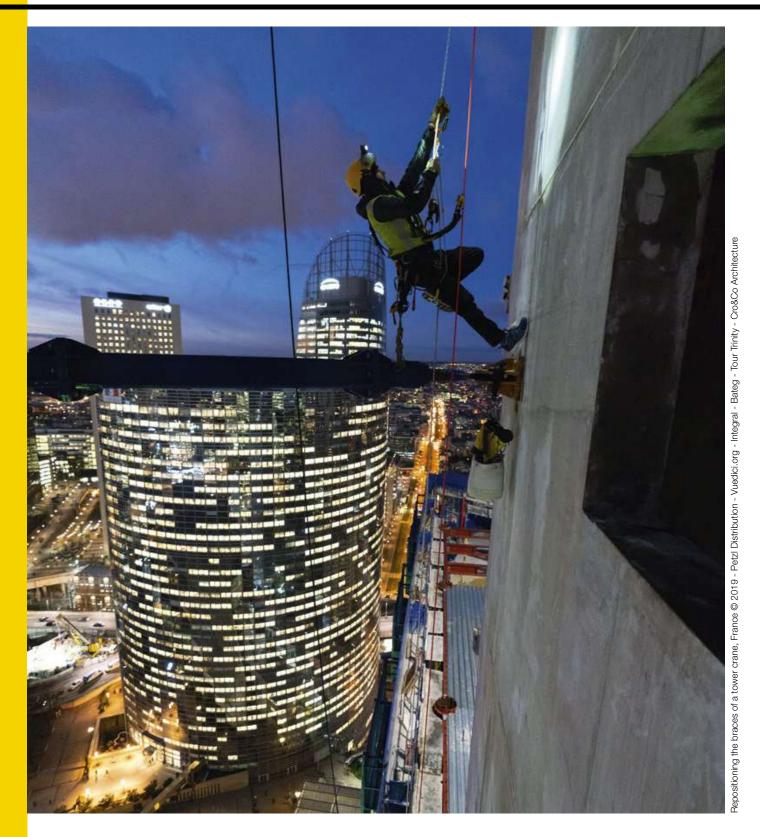



Optimal locking

Petzl's frame-loaded rope clamps are designed to function optimally under any conditions (wet, frozen, dirty ropes, for example). They are therefore equipped with a special stainless steel cam. Its unique design, the shape of its teeth and its self-cleaning slot allow optimal grip on the rope without damaging it, while reducing the effort required to slide the device up the rope.



Rope clamps for progression

Frame-loaded rope clamps are easy to install and specially designed for rope ascents (handled rope clamps, ventral rope clamps and foot-mounted rope clamps).



























Versatile rope clamp

Rope clamp that can be used to ascend a fixed rope, or as progress capture in a hauling system.







Backup rope clamp

Ultra-compact, lightweight rope clamp allows occasional rope ascents and hauling system set-ups.







Cam-loaded rope clamp

Rope clamp designed for use in haul systems as a tractor or progress capture device.















Rope clamps for progression



ASCENSION

Handled rope clamp for rope ascents

The ASCENSION handled rope clamp is designed for rope ascents and features an overmolded grip and ergonomic upper part for a comfortable and powerful grip when pulling with one or two hands. The ASCENSION handled ascender has a wide lower hole for easily attaching two carabiners for a lanyard and foot loop.



The overmolded dual-density grip has an area for the index finger and a wide, supportive base to keep the hand from slipping. Ergonomic upper part maximizes power when pulling with two hands



PROGRESS ADJUST-Y

Double adjustable progression lanyard

Find a description of the PROGRESS ADJUST-Y lanyard on page 90.

PROGRESS

Progression lanyard

Find a description of the PROGRESS lanyard on page 90.



FOOTAPE

Adjustable webbing foot loop

The adjustable FOOTAPE foot loop is used with an ASCENSION or BASIC rope clamp for rope ascents. A height-adjustable elastic keeps the foot in the loop, regardless of shoe type.

FOOTCORD

Adjustable cord foot loop

The adjustable FOOTCORD foot loop is used with an ASCENSION or BASIC rope clamp for rope ascents. Its 100 % Dyneema construction increases durability. A height-adjustable elastic keeps the foot in the loop, regardless of shoe type.

LOOPING

Four-step etrier

The LOOPING four-step etrier attaches to an ASCENSION rope clamp for rope ascents or directly onto an anchor for progression in overhangs.







SECUR

Ventral rope clamp

Designed for rope ascents, the CROLL ventral rope clamp is simple to use, thanks to its pinch opening system, which is totally integrated in the clamp to avoid any involuntary snagging. The attachment holes ensure efficient positioning during ascents. It is available in two versions to adapt to different rope diameters.































Shoulder straps for positioning the CROLL ventral rope clamp

SECUR shoulder straps position the CROLL ventral rope clamp and attach to AVAO SIT, FALCON, FALCON ASCENT and SEQUOIA SRT harnesses.



ASCENTREE

Double-handled rope clamp for tree care

Handled rope clamp designed for doubled rope ascents, the ASCENTREE has ergonomic handles allowing a comfortable and powerful grip when pulling. Catch/cam unit is totally integrated to prevent any involuntary snagging.



PANTIN®

Foot-mounted rope clamp

The PANTIN foot-mounted rope clamp is used with the CROLL, ASCENSION or ASCENTREE rope clamps to make rope ascents faster and less tiring. It is available in right- and left-foot versions.



Catch available as accessory to keep the rope in the device during rope ascents.

Versatile rope clamp



BASIC

Compact, versatile rope clamp

The BASIC rope clamp is very compact, making it easy to grip. The large lower hole allows lanyard and foot loop carabiners to be easily connected.

Backup rope clamp



TIBLOC

Backup rope clamp

Extremely compact and lightweight, the TIBLOC is a backup rope clamp for ascending ropes or setting up hauling systems.

Cam-loaded rope clamp



RESCUCENDER

Openable cam-loaded rope clamp

Simple to use and ergonomic, the RESCUCENDER is an openable cam-loaded rope clamp designed for use in haul systems as a tractor or progress capture device.



Openable guided cam allows easy installation or removal of the rope clamp at any point on the rope.



The safety catches are equipped with indicators that show when they are unlocked.



			Certifications	Rope diameter compatibility	Weight
Rope clamps for production of the ASCENSION	ogression	B17ALA (left-handed, black/yellow) B17ALN (left-handed, black) B17ARA (right-handed, black/yellow) B17ARN (right-handed, black)	CE EN 567 CE EN 12841 type B NFPA 1983 Technical Use EAC	8 to 13 mm	165 g
FOOTAPE		C47A	-	-	65 g
FOOTCORD	-	C48A	-	-	40 g
LOOPING		C25	-	-	145 g
CROLL S		B16BAA	CE EN 567 CE EN 12841 type B EAC NFPA 1983 Technical Use	8 to 11 mm	85 g
CROLL L		B016AA00	CE EN 567 CE EN 12841 type B EAC NFPA 1983 Technical Use	8 to 13 mm	140 g
SECUR	W	C74A	-	-	135 g
ASCENTREE		B19AAA	CE	8 to 13 mm	330 g
PANTIN	T	B02CLA (left foot) B02CRA (right foot)	The PANTIN is not an item of PPE	8 to 13 mm	85 g
Catch for PANTIN	0	B02210 (for left foot PANTIN) B02200 (for right foot PANTIN)	-	-	25 g
Versatile rope clam BASIC	P	B18BAA	CE EN 567 CE EN 12841 type B EAC	8 to 11 mm	85 g
Backup rope clamp		B01BN	CE EN 567 EAC	8 to 11 mm	35 g
Cam-loaded rope of RESCUCENDER	lamp	B50A	CE EN 567 CE EN 12841 type B NFPA 1983 Technical Use EAC	9 to 13 mm (1) 10 to 13 mm (2)	260 g



Two factors determine a pulley's efficiency:

- Sheave size: the larger the sheave diameter, the higher the efficiency
- Bushings and bearings:
- self-lubricating bushings are efficient, but they must be regularly maintained sealed ball bearings are very efficient, and they do not require any maintenance





High-efficiency pulleys

Versatile, high-performance pulleys adapted for intensive use.



RO



ARTNER







Pulley-carabiners

Pulley-carabiners with excellent efficiency.













Pulleys with an integrated progress capture system may be used to replace a traditional pulley/rope clamp set-up in hauling systems.









High-performance pulleys designed for use with a Prusik friction hitch to build a lightweight progress capture system. The shape of the side plates allows the knot to be released when it stops against the pulley.



V



IINDER



Z Z

Single pulleys

Lightweight, versatile pulleys designed for situations that do not require a high level of efficiency (redirecting the rope...).





W W



Transport pulleys

Pulleys for movement along a rope or cable. Extremely quick and easy to install, these pulleys have fixed side plates and ensure perfect stability with their two in-line sheaves.



ANDEM



ANDEM



Specialized pulleys

Specialized pulleys are designed for particular applications requiring passage of knots or movement along a mechanical lift cable.



OOTENAY







Haul kit

Ready-to-use kit, designed to easily pick off and lower - or simply pick off - a victim.















High-efficiency pulleys



PRO

Very high-efficiency drop-resistant pulley

Openable even when attached to the anchor, the PRO pulley is designed for maximum simplicity when setting up hauling or load deviation systems. The side plate that locks under load, the large-diameter sheave and the very high efficiency sealed ball bearings make a pulley that is well suited for handling heavy loads.



PARTNER

Ultra-compact, high-efficiency pulley

The PARTNER is an ultra compact, extremely lightweight pulley. It is designed for daily tasks and on-site rescue.



RESCUE

High strength, very high efficiency pulley

The very high efficiency RESCUE pulley is designed for intensive use by rescue professionals.

Pulley-carabiners



ROLLCLIP A

Pulley-carabiner that facilitates installation of the rope when pulley is connected to the anchor

ROLLCLIP A is a pulley-carabiner with the gate opening on the pulley end, to facilitate rope installation when the pulley is fixed to the anchor. It is available with an automatic TRIACT-LOCK locking system, or without a locking system. ROLLCLIP A may be used with a CAPTIV positioning bar to promote loading of the carabiner on the major axis, to limit the risk of rotation and to keep it integrated with the device.



The ROLLCLIP A pulley can be used as a directional point when combined with the RESCUCENDER rope clamp.



ROLLCLIP Z

Pulley-carabiner that facilitates installation on anchors and devices

ROLLCLIP Z is a pulley-carabiner with the gate opening on the non-pulley end, to facilitate installation on anchors and devices. It is available in two locking systems: automatic TRIACT-LOCK system or manual SCREW-LOCK system.



The ROLLCLIP Z pulley can be used for tree care to attach the ZIGZAG descender to the attachment bridge on the SEQUOIA harness, for improved lateral mobility.



Progress capture pulleys





PRO TRAXION

Very efficient drop-resistant progress capture pulley



The PRO TRAXION progress capture pulley is designed to allow rope installation while the pulley is connected to the anchor. With its large diameter sheave and great efficiency, it is particularly suitable for hauling heavy loads. The side plate locks when loaded and prevents opening of the pulley during use. The lower connection point can be used to create different types of hauling systems.





MICRO TRAXION

High-efficiency, ultra-compact progress capture pulley

MICRO TRAXION is an ultra-compact, extremely light progress capture pulley that is exceptionally efficient. The cam can be locked in the open position so the device can be used as a simple pulley.



Prusik pulleys



MINI

Highly efficient and lightweight Prusik pulley

The MINI compact pulley offers a lightweight solution for making progress-capture haul systems.





GEMINI

Highly efficient and lightweight double Prusik pulley

GEMINI is a compact double pulley for making progress-capture haul systems of high mechanical advantage.





MINDER

High strength, very high efficiency Prusik pulley

MINDER is a high-strength pulley designed for rescue professionals, for making progress-capture haul systems.





TWIN

High strength, very high efficiency double Prusik pulley

TWIN is a high-strength double pulley designed for rescue professionals. It can be used to make progress-capture haul systems of high mechanical advantage.



Single pulleys



MOBILE

Versatile ultra-compact pulley

Compact and extremely lightweight, the MOBILE pulley is designed for a variety of uses.





FIXE

Versatile compact pulley

Versatile and compact, the FIXE pulley allows quick installation onto the rope.



Transport pulleys





TANDEM® / TANDEM® SPEED

Double pulleys for Tyroleans

TANDEM and TANDEM SPEED are designed for Tyroleans and can accept up to three connectors to facilitate maneuvers. TANDEM is used on a rope. TANDEM SPEED can also be used on a cable because of its wear-resistant sheaves mounted on sealed ball bearings.

Specialized pulleys



KOOTENAY Knot-passing pulley

KOOTENAY is a knot-passing pulley that allows passage of joining knots. The large diameter sheave mounted on sealed ball bearings ensures excellent efficiency.



ROLLCAB

Roller for movement along cable

ROLLCAB is a roller designed for movement and evacuation along mechanical lift cables.

Haul kit



JAG SYSTEM

Haul kit

The JAG SYSTEM haul kit is for pickoffs, making a releasable anchor, or tensioning a system, thanks to its 4:1 mechanical advantage and excellent efficiency (sheaves with sealed ball bearings). The collapsed kit is highly compact, allowing it to be used even when the distance to the anchor is very short. The JAG SYSTEM haul kit is quick and easy to deploy: it is ready to use thanks to the flexible cover that prevents any risk of tangling. The haul end is color-coded for instant identification. It is available in three lengths: 1, 2 and 5 meters.



JAG TRAXION

High-efficiency double progress capture pulley

The JAG TRAXION double progress capture pulley is designed for use with the JAG pulley to make a 4:1 haul system. Sealed ball bearing sheaves for excellent efficiency.



JAG

High-efficiency double pulley

The JAG double pulley is designed for use with the JAG TRAXION double progress capture pulley to make a 4:1 haul system. Sealed ball bearing sheaves for excellent efficiency.



			Certifications	Rope diameter compatibility	Sheave diameter	Ball bearings	Efficiency	Maximum working load	Weight
High-efficie	ncy pulle	ys							
PRO		P46	CE EN 12278, NFPA 1983 Technical Use, EAC	7 to 13 mm	38 mm	•	95 %	2.5 kN x 2 = 5 kN	205 g
PARTNER		P52A	CE EN 12278	7 to 11 mm	25 mm	•	91 %	2.5 kN x 2 = 5 kN	56 g
RESCUE		P50A P50AN	CE EN 12278, NFPA 1983 General Use	7 to 13 mm	38 mm	•	95 %	4 kN x 2 = 8 kN	185 g
Pulley-caral	oiners								
ROLLCLIP A	00	P74 TL	CE EN 362, EN 12275, EN 12278, EAC	7 to 13 mm	18 mm	•	85 %	2 kN x 2 = 4 kN	115 g
	4 4	P74	CE EN 12275, EN 12278, EAC						105 g
ROLLCLIP Z	00	P75 TL	CE EN 362, EN 12278, EAC	7 to 13 mm	18 mm	•	85 %	2 kN x 2 = 4 kN	110 g
	AA	P75 SL	CE EN 362, EN 12278, EAC						105 g
Progress ca	pture pul	leys	05 =						
PRO TRAXION		P51A	CE EN 567, NFPA 1983 Technical Use, EAC	8 to 13 mm	38 mm	•	95 %	Pulley: 2.5 kN x 2 = 5 kN Rope clamp: 2.5 kN	265 g
MICRO TRAXION		P53	CE EN 567, EAC	8 to 11 mm	25 mm	•	91 %	Pulley: 2.5 kN x 2 = 5 kN Rope clamp: 2.5 kN	85 g
Prusik pulle	ys								
MINI		P59A	CE EN 12278, NFPA 1983 Technical Use	7 to 11 mm	25 mm	•	91 %	2.5 kN x 2 = 5 kN	80 g
GEMINI	(P66A	CE EN 12278, NFPA 1983 Technical Use	7 to 11 mm	25 mm	•	91 %	2 x 1.5 kN x 2 = 6 kN	135 g
MINDER		P60A	CE EN 12278, NFPA 1983 General Use	7 to 13 mm	51 mm	•	97 %	4 kN x 2 = 8 kN	295 g
TWIN		P65A	CE EN 12278, NFPA 1983 General Use	7 to 13 mm	51 mm	•	97 %	2 x 3 kN x 2 = 12 kN	450 g
Single pulle	ys								
MOBILE		P03A	CE EN 12278	7 to 13 mm	21 mm	-	71 %	2.5 kN x 2 = 5 kN	75 g
FIXE		P05W P05WN	CE EN 12278	7 to 13 mm	21 mm	-	71 %	2.5 kN x 2 = 5 kN	90 g
Transport p	ulleys								
TANDEM	(4)	P21	CE EN 12278	rope ≤ 13 mm	21 mm	-	71 %	10 kN	195 g
TANDEM SPEED		P21 SPE	CE EN 12278	rope ≤ 13 mm cable ≤ 12 mm	27.5 mm	•	95 %	10 kN	270 g
Specialized	pulleys								
KOOTENAY		P67	CE EN 12278	8 to 19 mm	76 mm	•	-	5 kN x 2 = 10 kN	1390 g
ROLLCAB	1	P47	CE EN 1909	cable ≤ 55 mm	55 mm	-	-	5 kN	1470 g
Haul kit									
JAG SYSTEM	1 m 2 m 5 m	P044AA00 P044AA01 P044AA02	EAC	-	-	•	-	6 kN	610 g 805 g 1460 g
JAG TRAXION	9	P54	CE EN 567, NFPA 1983 Technical Use	8 to 11 mm	25 mm	•	91 %	2 x 1.5 kN x 2 = 6 kN	145 g
JAG	0	P45	CE EN 12278, NFPA 1983 Technical Use	8 to 11 mm	25 mm	•	91 %	2 x 1.5 kN x 2 = 6 kN	120 g




































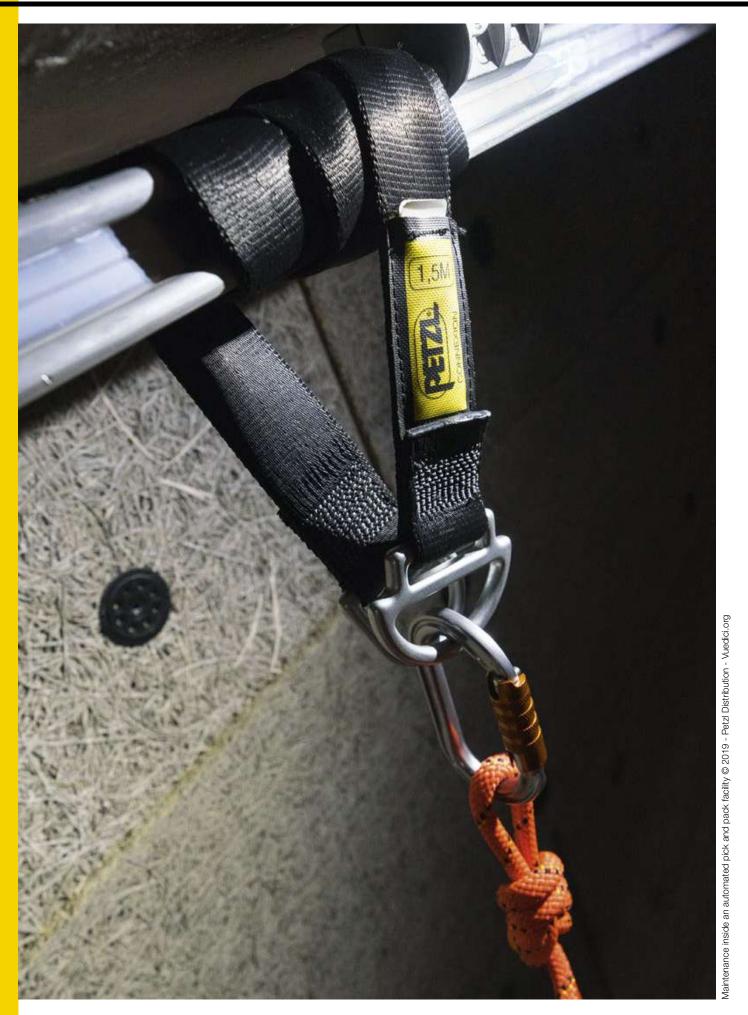



Rock and concrete anchors

Elements that allow installation of temporary or permanent fixed anchors.



COEUR STEEL

COLLINOX





COEUR HCR

BAT'INOX


















Swivels provide a solution to the problems of twisting and tangling ropes, especially when hauling.

Rigging plates allow the workstation to be organized and increase the number of anchoring options.

The rings allow multiple anchors to be organized.
























Slings designed for installation of easily transportable temporary anchors, offering adjustability, or a choice of lengths.


















Quick adjustment anchors



Temporary horizontal lifeline













Rock and concrete anchors



COEUR BOLT STEEL / STAINLESS / HCR

Anchors comprised of a COEUR hanger, a nut and a bolt (pack of 20)

Different steels suited to various environments

Petzl anchors (hangers and bolts) use different types of steels to adapt the anchor to the environment in which it is used:

- Standard steel, designed for interior uses or non-permanent installations: COEUR BOLT STEEL
- 316L high quality stainless steel, designed for typical exterior uses: COEUR BOLT STAINLESS
- HCR 904 (High Corrosion Resistance) stainless steel, designed for ultra-corrosive environments: **COEUR BOLT HCR**


Hangers (COEUR STEEL, COEUR STAINLESS and COEUR HCR) and bolts (BOLT STEEL, BOLT STAINLESS and BOLT HCR) are also available separately (pack of 20).




COEUR PULSE

Removable 12 mm anchor with locking function

The COEUR PULSE is a 12 mm removable stainless steel anchor that can be installed and removed very simply and rapidly, without tools. The locking function limits the risk of involuntary removal.



Simple, rapid installation and removal, without tools.



Manual screw-lock function limits the risk of involuntary removal.



COLLINOX

Forged stainless steel glue-in bolt (pack of 10)



AMPOULE COLLINOX

Resin glue for COLLINOX (pack of 10)



BAT'INOX

Forged stainless steel glue-in bolt (pack of 10)



AMPOULE BAT'INOX

Resin glue for BAT'INOX (pack of 10)



Rigging equipment



MICRO SWIVEL

Compact gated swivel

The compact, gated MICRO SWIVEL is designed for attachment to a locking carabiner. It helps prevent twisting of lanyards and allows correct positioning of devices. Its design without bearings allows it to turn freely when not loaded and to stop moving when loaded in order to hold the devices in position.





SWIVEL OPEN

Gated swivel with sealed ball bearings

The SWIVEL OPEN gated swivel features a large opening and thus can be attached to a wide range of products (pulleys, lanyards...). It reduces the bulk and weight of component systems and solves the twisting and tangling problems of ropes and lanyards. Sealed ball bearings offer excellent performance and reliability.



SWIVEL

Ball bearing swivel

Available in two sizes, the SWIVEL prevents the rope from twisting when the load is turning. Sealed ball bearings offer excellent performance and reliability.





PAW

Rigging plate

Available in three sizes, the PAW rigging plate is for organizing the workstation and creating multi-anchor systems.







RING

Connection ring

The RING connection ring can be used to create multiple anchors or be installed directly onto the SEQUOIA and SEQUOIA SRT harnesses' attachment bridges to improve the arborist's lateral mobility.



RING OPEN

Multidirectional gated ring

See page 106 for details on the RING OPEN multidirectional gated ring.



Anchor straps



ANNEAU

Open loop sling

ANNEAU is an open loop sling available in four lengths, color-coded for easy identification of length.





ST'ANNEAU

Dyneema webbing sling

ST'ANNEAU is a lightweight alternative to classic slings, available in three lengths, with color coding for easy identification of length.





PUR'ANNEAU

Very lightweight sling in high-modulus polyethylene

PUR'ANNEAU is a very lightweight sling with exceptional durability, thanks to its high-modulus polyethylene construction. It is particularly supple, for easy handling. Available in three lengths, color-coded for easy identification of length.









Anchor straps (cont)



CONNEXION FIXE

Anchor strap

CONNEXION FIXE is a durable anchor strap with two forged steel attachment points. It offers several configurations for setting up an anchor: directly on an anchor point or around a suitable structure. It is available in three lengths (100, 150 and 200 cm).



CONNEXION VARIO

Adjustable anchor strap

CONNEXION VARIO is a durable and adjustable anchor strap equipped with two forged steel attachment points. It offers several configurations for setting up an anchor: directly on an anchor point or around a suitable structure. The strap length is adjustable, thanks to an adjustment buckle. A system keeps the remaining webbing stowed. It is available in two versions (30 to 200 cm and 200 to 400 cm).



TREESBEE

Friction saver for tree care, designed for ropes with spliced terminations

The TREESBEE anchor strap is used to improve rope glide at the anchor while protecting the tree from abrasion. It is designed for ropes with spliced terminations (the splice goes through the small ring).

TREESBEE SCREWLINK

Friction saver for tree care, designed for ropes with sewn terminations

The TREESBEE SCREWLINK anchor strap is used to improve rope glide at the anchor while protecting the tree from abrasion. It is designed for ropes with sewn terminations (the link opens to let the sewn termination through).

Quick adjustment anchors



GRILLON anchor

Quick-adjustment anchor

The adjustable GRILLON anchor can be used to quickly set a fixed anchor point. The length of rope required to set it is easily adjusted with the integrated self-locking device. The removable protective sheath allows smoother rope glide while protecting the rope from abrasive surfaces. It is available in four lengths.

PROGRESS ADJUST-I anchor

Lightweight quick-adjust anchor

Lightweight and compact, the PROGRESS ADJUST-I adjustable anchor can be used to quickly set up a fixed anchor point. The rope length, required to set it up, is easily adjusted with the ADJUST rope adjuster. The removable protective sheath protects the rope, while enhancing rope glide. It is available in three lengths (2, 3 and 5 m).

Temporary horizontal lifeline



GRILLON lifeline

Temporary horizontal lifeline

GRILLON allows a horizontal lifeline to be installed quickly when there is a large work area to cover. The integrated self-locking device allows easy adjustment of length, depending on the distance between two anchor points. It is available in four lengths to adapt to any situation.



					Shear str	on ath	Pull out strongth	
		Certificati	ons	Diameter	in 50 MPa c		in 50 MPa concrete	Weight
Rock and concrete anch	ors							
	P36BA 10	-		10 mm	23 kN	1	15 kN	110 g
COEUR BOLT STEEL	P36BA 12	EN 959)	12 mm	25 kN	1	18 kN	135 g
COELID DOLT STAINLESS	P36BS 10	EN OEG)	10 mm	05 LA	1	15 kN	110 g
COEUR BOLT STAINLESS	P36BS 12	EN 959)	12 mm	25 kN	N	15 kN	135 g
COEUR BOLT HCR	P36BH 12	EN 959)	12 mm	25 kN	1	15 kN	145 g
COEUR STEEL	P36AA 10	EN 795		10 mm	_		_	65 g
	P36AA 12	EN 795 A, E	N 959	12 mm				60 g
COEUR STAINLESS	P36AS 10	EN 795 A, E	N 959	10 mm	-		-	65 g
COEUR HCR	P36AS 12 P36AH 12	EN 795 A, E	N OFO	12 mm 12 mm				60 g
COEUR PULSE	P37S 12	CE EN 79		12 mm	 25 kN	J		140 g
COLLINOX	G100AA00	EN 959		10 mm	25 kN			95 g
AMPOULE COLLINOX	G101AA00	-	<u></u>	-	-	•		14 g
BAT'INOX	G102AA00	EN 959)	14 mm	25 kN	1	15 kN	250 g
AMPOULE BAT'INOX	G103AA00	-		-	-		-	20 g
				Certification	_	l ,	Prophing strangeth	Wainht
				Certification	5		Breaking strength	Weight
Rigging equipment								
MICRO SWIVEL	P58 XSO			CE, EAC				75 g
SWIVEL OPEN	P58 SO		-	EAC, NFPA 1983 Te				130 g
SWIVEL S SWIVEL L	P58 S P58 L		-	EAC, NFPA 1983 Te				95 g
SWIVELL	P63 S / P63 SN	(black)	UE,	EAC, NFPA 1983 G	lerierai Ose		JO KIN	150 g 55 g (S)
PAW S / M / L	P63 M / P63 MN	, ,		E, NFPA 1983 Gen	eral Use		23 kN 36 kN 36 kN	210 g (M)
.,, =	P63 L / P63 LN (black)						350 g (L)	
	C04620 C04630		- CE		23 kN		40 g (S)	
RING S / L							70 g (L)	
				Certifications	Leng	ıth	Breaking strength	Weight
							3 2 2 3 2	
Anchor straps								
Anchor straps	C40A 60, C40 6	` '		CE EN 566	60 c			60 g
ANNEAU	C40A 80, C40 8	30N (black)		CE EN 566, CE EN 795 B,	80 c	m	22 kN	80 g
•	C40A 80, C40 8	30N (black)			80 c	m	22 kN	80 g 100 g
•	C40A 80, C40 8 C40A 120, C40 C40A 150	30N (black)		E EN 795 B,	80 c 120 c	m cm cm	22 kN	80 g 100 g 135 g
ANNEAU	C40A 80, C40 8 C40A 120, C40 C40A 150 C07 24	30N (black)	(CE EN 795 B, EAC,	80 c 120 c 150 c 24 c	m cm cm		80 g 100 g 135 g 10 g
•	C40A 80, C40 8 C40A 120, C40 C40A 150	30N (black)	(E EN 795 B,	80 c 120 c	m cm cm m		80 g 100 g 135 g
ANNEAU	C40A 80, C40 8 C40A 120, C40 C40A 150 C07 24 C07 60	30N (black)	(CE EN 795 B, EAC,	80 c 120 c 150 c 24 c 60 c	m cm cm m m		80 g 100 g 135 g 10 g 20 g
ANNEAU	C40A 80, C40 8 C40A 120, C40 C40A 150 C07 24 C07 60 C07 120	30N (black)		CE EN 795 B, EAC,	80 c 120 d 150 d 24 c 60 c	m cm m m m m m m m m m m m m	22 kN	80 g 100 g 135 g 10 g 20 g 40 g
ANNEAU ST'ANNEAU	C40A 80, C40 8 C40A 120, C40 C40A 150 C07 24 C07 60 C07 120 G006AA00	30N (black)		CE EN 795 B, EAC, CE EN 795 B	80 c 120 c 150 c 24 c 60 c 120 c	m cm m m m cm m m cm cm	22 kN	80 g 100 g 135 g 10 g 20 g 40 g 18 g
ANNEAU ST'ANNEAU PUR'ANNEAU	C40A 80, C40 8 C40A 120, C40 C40A 150 C07 24 C07 60 C07 120 G006AA00 G006AA01	30N (black)		CE EN 795 B, EAC, CE EN 795 B	80 c 120 d 150 d 24 c 60 c 120 d	m cm m m m m m cm m cm m cm m cm	22 kN	80 g 100 g 135 g 10 g 20 g 40 g 18 g 32 g
ANNEAU ST'ANNEAU PUR'ANNEAU	C40A 80, C40 8 C40A 120, C40 C40A 150 C07 24 C07 60 C07 120 G006AA00 G006AA01 G006AA02	30N (black)		DE EN 795 B, EAC, DE EN 795 B DE EN 795 B DE EN 795 B	80 c 120 d 150 d 24 c 60 c 120 d 180 d	m cm m m m cm m cm cm cm cm cm cm cm	18 kN	80 g 100 g 135 g 10 g 20 g 40 g 18 g 32 g 48 g
ANNEAU ST'ANNEAU PUR'ANNEAU	C40A 80, C40 8 C40A 120, C40 C40A 150 C07 24 C07 60 C07 120 G006AA00 G006AA01 G006AA02 G010AA00 G010AA01 G010AA02	30N (black)	(NFPA A	DE EN 795 B, EAC, DE EN 795 B DE EN 795 B DE EN 795 B, 1983 General Use, NSI Z359.18,	80 c 120 c 150 c 24 c 60 c 120 c 180 c 150 c 200 c	m cm m m m cm m cm cm cm cm cm cm cm cm	22 kN 22 kN	80 g 100 g 135 g 10 g 20 g 40 g 18 g 32 g 48 g 355 g
ANNEAU ST'ANNEAU PUR'ANNEAU NEW 2020 CONNEXION FIXE	C40A 80, C40 8 C40A 120, C40 C40A 150 C07 24 C07 60 C07 120 G006AA00 G006AA01 G006AA02 G010AA00 G010AA01 G010AA02 G011AA00	30N (black)	(NFPA A	DE EN 795 B, EAC, DE EN 795 B DE EN 795 B DE EN 795 B, 1983 General Use,	80 c 120 c 150 c 24 c 60 c 120 c 180 c 150 c 200 c 30-200	m cm	22 kN 22 kN 22 kN	80 g 100 g 135 g 10 g 20 g 40 g 18 g 32 g 48 g 355 g 415 g 475 g 810 g
ANNEAU ST'ANNEAU PUR'ANNEAU NEW 2020 CONNEXION FIXE NEW 2020 CONNEXION VARIO	C40A 80, C40 8 C40A 120, C40 C40A 150 C07 24 C07 60 C07 120 G006AA00 G006AA01 G006AA02 G010AA00 G010AA01 G010AA02 G011AA00 G011AA01	30N (black)	(NFPA A CS	DE EN 795 B, EAC, DE EN 795 B DE EN 795 B DE EN 795 B, 1983 General Use, NSI Z359.18, SA Z259.15-17	80 c 120 c 150 c 24 c 60 c 120 c 60 c 120 c 180 c 150 c 200 c 30-200 200-40	m cm	22 kN 22 kN 22 kN 22 kN	80 g 100 g 135 g 10 g 20 g 40 g 18 g 32 g 48 g 355 g 415 g 475 g 810 g 950 g
ANNEAU ST'ANNEAU PUR'ANNEAU NEW2020 CONNEXION FIXE NEW2020 CONNEXION VARIO TREESBEE	C40A 80, C40 8 C40A 120, C40 8 C40A 150 C07 24 C07 60 C07 120 G006AA00 G006AA01 G006AA02 G010AA00 G010AA01 G010AA01 G011AA00 G011AA00 C04110	30N (black)	(NFPA A CS	DE EN 795 B DE EN 795 B DE EN 795 B DE EN 795 B DE EN 795 B, 1983 General Use, NSI 2359.18, SA 2259.15-17 DE EN 795 B	80 c 120 c 150 c 24 c 60 c 120 c 60 c 120 c 180 c 180 c 200 c 200 c 200 c 110 c	m cm cm m m cm cm cm cm cm cm cm cm cm c	22 kN 22 kN 22 kN 22 kN 23 kN	80 g 100 g 135 g 10 g 20 g 40 g 18 g 32 g 48 g 355 g 415 g 475 g 810 g 950 g 240 g
ANNEAU ST'ANNEAU PUR'ANNEAU NEW 2020 CONNEXION FIXE NEW 2020 CONNEXION VARIO	C40A 80, C40 8 C40A 120, C40 C40A 150 C07 24 C07 60 C07 120 G006AA00 G006AA01 G006AA02 G010AA00 G010AA01 G010AA02 G011AA00 G011AA01	30N (black)	(NFPA A CS	DE EN 795 B, EAC, DE EN 795 B DE EN 795 B DE EN 795 B, 1983 General Use, NSI Z359.18, SA Z259.15-17	80 c 120 c 150 c 24 c 60 c 120 c 60 c 120 c 180 c 150 c 200 c 30-200 200-40	m cm	22 kN 22 kN 22 kN 22 kN 23 kN	80 g 100 g 135 g 10 g 20 g 40 g 18 g 32 g 48 g 355 g 415 g 475 g 810 g 950 g
ANNEAU ST'ANNEAU PUR'ANNEAU NEW 2020 CONNEXION FIXE NEW 2020 CONNEXION VARIO TREESBEE	C40A 80, C40 8 C40A 120, C40 8 C40A 150 C07 24 C07 60 C07 120 G006AA00 G006AA01 G006AA02 G010AA00 G010AA01 G010AA01 G011AA00 G011AA00 C04110	30N (black)	(((((((((((((((((((DE EN 795 B DE EN 795 B DE EN 795 B DE EN 795 B DE EN 795 B, 1983 General Use, NSI 2359.18, SA 2259.15-17 DE EN 795 B	80 c 120 c 150 c 24 c 60 c 120 c 60 c 120 c 180 c 180 c 200 c 200 c 200 c 110 c	m cm	22 kN 22 kN 22 kN 22 kN 23 kN 15 kN	80 g 100 g 135 g 10 g 20 g 40 g 18 g 32 g 48 g 355 g 415 g 475 g 810 g 950 g 240 g
ANNEAU ST'ANNEAU PUR'ANNEAU NEW 2020 CONNEXION FIXE NEW 2020 CONNEXION VARIO TREESBEE	C40A 80, C40 8 C40A 120, C40 8 C40A 150 C07 24 C07 60 C07 120 G006AA00 G006AA01 G006AA02 G010AA00 G010AA01 G010AA02 G011AA00 G011AA01 C04110 C04110 M	50N (black) 120 N (black)	NFPA A CS	DE EN 795 B DE EN 795 B DE EN 795 B DE EN 795 B DE EN 795 B, 1983 General Use, NSI Z359.18, SA Z259.15-17 DE EN 795 B DE EN 795 B DE EN 795 B	80 c 120 c 150 c 24 c 60 c 120 c 60 c 120 c 180 c 180 c 200 c 200 c 200 c 110 c	m cm	22 kN 22 kN 22 kN 22 kN 23 kN 15 kN	80 g 100 g 135 g 10 g 20 g 40 g 18 g 32 g 48 g 355 g 415 g 475 g 810 g 950 g 240 g 295 g
ANNEAU ST'ANNEAU PUR'ANNEAU NEW 2020 CONNEXION FIXE NEW 2020 CONNEXION VARIO TREESBEE TREESBEE SCREWLINK	C40A 80, C40 8 C40A 120, C40 8 C40A 150 C07 24 C07 60 C07 120 G006AA00 G006AA01 G006AA02 G010AA00 G010AA01 G010AA02 G011AA00 G011AA01 C04110 C04110 M	on (black) 120 N (black)	NFPA A CS	DE EN 795 B DE EN 795 B DE EN 795 B DE EN 795 B DE EN 795 B, 1983 General Use, NSI Z359.18, SA Z259.15-17 DE EN 795 B DE EN 795 B DE EN 795 B	80 c 120 c 150 c 24 c 60 c 120 c 60 c 120 c 180 c 180 c 200 c 200 c 200 c 110 c	m cm cm cm cm cm cm cm cm cm ccm ccm cc	22 kN 22 kN 22 kN 22 kN 23 kN 15 kN	80 g 100 g 135 g 10 g 20 g 40 g 18 g 32 g 48 g 355 g 415 g 475 g 810 g 950 g 240 g 295 g
ANNEAU ST'ANNEAU PUR'ANNEAU NEW 2020 CONNEXION FIXE NEW 2020 CONNEXION VARIO TREESBEE TREESBEE SCREWLINK	C40A 80, C40 8 C40A 120, C40 8 C40A 150 C07 24 C07 60 C07 120 G006AA00 G006AA01 G006AA02 G010AA01 G010AA02 G011AA00 G011AA01 C04110 C04110 M	orizontal lifeling	NFPA A CS	DE EN 795 B DE EN 795 B DE EN 795 B DE EN 795 B DE EN 795 B, 1983 General Use, NSI Z359.18, SA Z259.15-17 DE EN 795 B DE EN 795 B DE EN 795 B	80 c 120 c 150 c 24 c 60 c 120 c 60 c 120 c 180 c 180 c 200 c 200 c 200 c 110 c	m cm cm cm cm cm cm cm cm cm ccm ccm cc	22 kN 22 kN 22 kN 22 kN 23 kN 15 kN	80 g 100 g 135 g 10 g 20 g 40 g 18 g 32 g 48 g 355 g 415 g 475 g 810 g 950 g 240 g 295 g Weight
ANNEAU ST'ANNEAU PUR'ANNEAU NEW 2020 CONNEXION FIXE NEW 2020 CONNEXION VARIO TREESBEE TREESBEE SCREWLINK Quick-adjust anchors an	C40A 80, C40 8 C40A 120, C40 8 C40A 150 C07 24 C07 60 C07 120 G006AA00 G006AA01 G006AA02 G010AA00 G011AA00 G011AA01 C04110 C04110 M d temporary h L052AA00, L053 L052AA02	orizontal lifeling	(NFPA A CS	DE EN 795 B, EAC, DE EN 795 B DE EN 795 B DE EN 795 B, 1983 General Use, NSI Z359.18, SA Z259.15-17 DE EN 795 B	80 c 120 c 150 c 24 c 60 c 120 c 60 c 120 c 180 c 180 c 200 c 200 c 200 c 110 c	m cm cm cm cm cm cm cm cm cm ccm ccm cc	22 kN 22 kN 22 kN 22 kN 23 kN 15 kN ength 2 m 3 m 4 m	80 g 100 g 135 g 10 g 20 g 40 g 18 g 32 g 48 g 355 g 415 g 475 g 810 g 950 g 240 g 295 g Weight 480 g 560 g 640 g
ANNEAU ST'ANNEAU PUR'ANNEAU NEW 2020 CONNEXION FIXE NEW 2020 CONNEXION VARIO TREESBEE TREESBEE SCREWLINK	C40A 80, C40 8 C40A 120, C40 8 C40A 150 C07 24 C07 60 C07 120 G006AA00 G006AA01 G006AA02 G010AA00 G011AA00 G011AA01 C04110 C04110 M d temporary h L052AA00, L053 L052AA02 L052AA03	orizontal lifeling	(NFPA A CS	DE EN 795 B DE EN 795 B DE EN 795 B DE EN 795 B DE EN 795 B, 1983 General Use, NSI Z359.18, SA Z259.15-17 DE EN 795 B DE EN 795 B DE EN 795 B	80 c 120 c 150 c 24 c 60 c 120 c 60 c 120 c 180 c 180 c 200 c 200 c 200 c 110 c	m cm cm cm cm cm cm cm cm cm ccm ccm cc	22 kN 22 kN 22 kN 22 kN 23 kN 15 kN ength 2 m 3 m 4 m 5 m	80 g 100 g 135 g 10 g 20 g 40 g 18 g 32 g 48 g 355 g 415 g 475 g 810 g 950 g 240 g 295 g Weight 480 g 560 g 640 g 720 g
ANNEAU ST'ANNEAU PUR'ANNEAU NEW 2020 CONNEXION FIXE NEW 2020 CONNEXION VARIO TREESBEE TREESBEE SCREWLINK Quick-adjust anchors an	C40A 80, C40 8 C40A 120, C40 C40A 150 C07 24 C07 60 C07 120 G006AA00 G006AA01 G006AA02 G010AA01 G010AA02 G011AA01 C04110 C04110 M d temporary h L052AA00, L052 L052AA02 L052AA03 L052AA04	orizontal lifeling	(NFPA A CS	DE EN 795 B, EAC, DE EN 795 B DE EN 795 B DE EN 795 B, 1983 General Use, NSI 2359.18, SA 2259.15-17 DE EN 795 B	80 c 120 c 150 c 24 c 60 c 120 c 60 c 120 c 180 c 180 c 200 c 200 c 200 c 110 c	m em	22 kN 22 kN 22 kN 22 kN 23 kN 15 kN ength 2 m 3 m 4 m 5 m	80 g 100 g 135 g 10 g 20 g 40 g 18 g 32 g 48 g 355 g 415 g 475 g 810 g 950 g 240 g 295 g Weight 480 g 560 g 640 g 720 g 1075 g
ANNEAU ST'ANNEAU PUR'ANNEAU NEW 2020 CONNEXION FIXE NEW 2020 CONNEXION VARIO TREESBEE TREESBEE SCREWLINK Quick-adjust anchors an	C40A 80, C40 8 C40A 120, C40 C40A 150 C07 24 C07 60 C07 120 G006AA00 G006AA01 G006AA02 G010AA01 G010AA02 G011AA00 G011AA01 C04110 C04110 M d temporary h L052AA00, L052 L052AA03 L052AA04 L052AA05	orizontal lifeling	(NFPA A CS	DE EN 795 B, EAC, DE EN 795 B DE EN 795 B DE EN 795 B, 1983 General Use, NSI 2359.18, SA 2259.15-17 DE EN 795 B	80 c 120 c 150 c 24 c 60 c 120 c 60 c 120 c 180 c 180 c 200 c 200 c 200 c 110 c	m em	22 kN 22 kN 22 kN 22 kN 23 kN 15 kN ength 2 m 3 m 4 m 5 m 10 m	80 g 100 g 135 g 10 g 20 g 40 g 18 g 32 g 48 g 355 g 415 g 475 g 810 g 950 g 240 g 295 g Weight 480 g 560 g 640 g 720 g 1075 g 1475 g
ANNEAU ST'ANNEAU PUR'ANNEAU NEW 2020 CONNEXION FIXE NEW 2020 CONNEXION VARIO TREESBEE TREESBEE SCREWLINK Quick-adjust anchors an	C40A 80, C40 8 C40A 120, C40 C40A 150 C07 24 C07 60 C07 120 G006AA00 G006AA01 G006AA02 G010AA01 G010AA02 G011AA01 C04110 C04110 M d temporary h L052AA00, L05: L052AA01 L052AA03 L052AA04 L052AA06	orizontal lifeling	(NFPA A CS	DE EN 795 B, EAC, DE EN 795 B DE EN 795 B DE EN 795 B, 1983 General Use, NSI 2359.18, SA 2259.15-17 DE EN 795 B	80 c 120 c 150 c 24 c 60 c 120 c 60 c 120 c 180 c 180 c 200 c 200 c 200 c 110 c	m em	22 kN 22 kN 22 kN 22 kN 23 kN 15 kN ength 2 m 3 m 4 m 5 m 10 m 5 m 20 m	80 g 100 g 135 g 10 g 20 g 40 g 18 g 32 g 48 g 355 g 415 g 475 g 810 g 950 g 240 g 295 g Weight 480 g 560 g 640 g 720 g 1075 g 1475 g 1875 g
ANNEAU ST'ANNEAU PUR'ANNEAU NEW 2020 CONNEXION FIXE NEW 2020 CONNEXION VARIO TREESBEE TREESBEE SCREWLINK Quick-adjust anchors an	C40A 80, C40 8 C40A 120, C40 C40A 150 C07 24 C07 60 C07 120 G006AA00 G006AA01 G010AA01 G010AA02 G011AA01 C04110 C04110 M d temporary h L052AA00, L05: L052AA02 L052AA04 L052AA05 L052AA06 L044BA01	orizontal lifeling	(NFPA A CS	DE EN 795 B CETIFICATIONS	80 c 120 c 150 c 24 c 60 c 120 c 60 c 120 c 180 c 180 c 200 c 200 c 200 c 110 c	m em	22 kN 22 kN 22 kN 22 kN 23 kN 15 kN 26 m 3 m 4 m 5 m 10 m 15 m 20 m	80 g 100 g 135 g 10 g 20 g 40 g 18 g 32 g 48 g 355 g 415 g 475 g 810 g 950 g 240 g 295 g Weight 480 g 560 g 640 g 720 g 1075 g 1475 g 1875 g 300 g
ANNEAU ST'ANNEAU PUR'ANNEAU NEW 2020 CONNEXION FIXE NEW 2020 CONNEXION VARIO TREESBEE TREESBEE SCREWLINK Quick-adjust anchors an	C40A 80, C40 8 C40A 120, C40 C40A 150 C07 24 C07 60 C07 120 G006AA00 G006AA01 G006AA02 G010AA01 G010AA02 G011AA01 C04110 C04110 M d temporary h L052AA00, L05: L052AA01 L052AA03 L052AA04 L052AA06	orizontal lifeling	(NFPA A CS	DE EN 795 B DE EN 795 B, 1983 General Use, NSI 2359.18, SA 2259.15-17 DE EN 795 B DE EN 795 B	80 c 120 c 150 c 24 c 60 c 120 c 60 c 120 c 180 c 180 c 200 c 200 c 200 c 110 c	m em	22 kN 22 kN 22 kN 22 kN 23 kN 15 kN ength 2 m 3 m 4 m 5 m 10 m 5 m 20 m	80 g 100 g 135 g 10 g 20 g 40 g 18 g 32 g 48 g 355 g 415 g 475 g 810 g 950 g 240 g 295 g Weight 480 g 560 g 640 g 720 g 1075 g 1475 g 1875 g







































Low stretch kernmantel ropes

For work at height

Standard diameter low stretch kernmantel rope ensures a good grip for easier handling.





AXIS 11 mm with sewn termination

For rope access

Low stretch kernmantel rope with small diameter ensures very good performance in terms of flexibility and weight.









For rescue

Low stretch kernmantel rope with a large diameter ensures great strength and excellent handling when working with heavy loads.



ECTOR 12,5 mm





Low-stretch kernmantel ropes with splice provide optimal performance when used with the ZIGZAG and ZIGZAG PLUS mechanical Prusiks.









CONTROL 12,5 mm

Dynamic rope

For progression using rock climbing techniques.







Technical cord

Cord for creation of Prusik hitches, anchors or haul systems.



Accessory cord

Cord for guiding a victim during rescue, or for hauling equipment.



Rope protectors

Devices that protect the rope at rub points.









Low stretch kernmantel ropes

A specific construction for each use and a choice of lengths and colors according to user needs.



· EverFlex technology: guaranteed flexibility and handling over time

This technology ensures great flexibility over time and under any conditions (water, dust, mud...). The flexibility allows it to maintain consistent handling over the long run and perform optimally with devices.

Multiple certifications

Petzl low stretch kernmantel ropes are certified to the following standards:

- European: CE EN 1891 type A
- American: NFPA 1983 (except FLOW 11.6 mm and CONTROL 12.5 mm, which allow working in compliance with the ANSI Z133 standard)
- Russian: EAC

Available in several lengths and colors

Petzl low stretch kernmantel ropes come in several standard lengths, according to user needs and activities.



For work at height, rope access and rescue

They are also available in six colors for easy differentiation of kits, work ropes, safety ropes, and collective access ropes.



For tree care

They are available in two colors, to differentiate working ropes from access ropes.

Petzl Custom service for ropes





CUSTOM

Petzl Custom service allows you to choose:

- rope color
- rope length
- type of termination (sewn or not, only on low stretch kernmantel ropes)

Service available only for AXIS 11 mm, PARALLEL 10.5 mm, VECTOR 12.5 mm low stretch kernmantel ropes and the SEGMENT 8 mm technical cord.

For work at height

Standard diameter low stretch kernmantel ropes ensure a good grip and compatibility with most devices.

For rope access

Low stretch kernmantel rope with small diameter ensures very good performance in terms of flexibility and weight.

For rescue

Low stretch kernmantel rope with a large diameter ensures great strength and excellent handling when working with heavy loads.

For tree care

Low-stretch kernmantel ropes with splice provide optimal performance when used with the ZIGZAG and ZIGZAG PLUS mechanical Prusiks.

Ø 11.6 mm

Ø 12.5 mm





AXIS 11 mm

Low stretch kernmantel rope with good handling for work at height

The AXIS 11 mm low stretch kernmantel rope is designed for work at height. The standard diameter ensures a good grip for easier handling. The EverFlex technology guarantees great flexibility and consistent performance over time. Rope available in six colors and four lengths.





AXIS 11 mm with sewn termination

Low stretch kernmantel rope with sewn termination and good handling, for work at height

The AXIS 11 mm low stretch kernmantel rope with sewn termination is designed for work at height. The standard diameter ensures a good grip for easier handling. The EverFlex construction guarantees great flexibility and consistent performance over time. The sewn termination with protective sheath helps keep the connector in position and facilitates handling. It is suitable for use with an ASAP mobile fall arrester, or in a rescue kit with an I'D S descender. Rope available in six lengths.





PARALLEL 10.5 mm

Low stretch kernmantel rope, flexible and lightweight for rope access

The PARALLEL 10.5 mm low stretch kernmantel rope is designed for rope access. The small diameter ensures very good performance in terms of flexibility and weight. It has low stretch when put under tension, increasing efficiency at the start of a rope ascent. The EverFlex technology guarantees great flexibility and consistent performance over time. Rope available in six colors and four lengths.





VECTOR 12.5 mm

Low stretch kernmantel, high-strength rope with excellent handling, for rescue

The VECTOR 12.5 mm low stretch kernmantel rope is designed for rescue. The large diameter ensures great strength and excellent grip when handling heavy loads. The EverFlex construction guarantees great flexibility and consistent performance over time. Rope available in six colors and four lengths.





FLOW 11.6 mm

Flexible and lightweight low stretch kernmantel rope, for tree care

The FLOW 11.6 mm low stretch kernmantel rope is designed for tree care. The small diameter ensures very good performance in terms of flexibility and weight. It has low stretch when loaded, increasing efficiency when moving through the tree. The EverFlex technology guarantees great flexibility and handling over time. It comes with a splice at one end for optimal rope glide through devices like a friction saver or pulley, and through tree branches. The small size of the splice allows it to pass through the friction chain of the ZIGZAG and ZIGZAG PLUS mechanical Prusiks. Rope available in two colors and three lengths.





CONTROL 12.5 mm

Low stretch kernmantel, high-strength rope with excellent handling, for tree care

The CONTROL 12.5 mm low stretch kernmantel rope is designed for tree care. The large diameter ensures high strength and excellent grip. The EverFlex technology guarantees great flexibility and handling over time. It comes with a splice at one end for optimal rope glide through devices like a friction saver or pulley, and through tree branches. The small size of the splice allows it to pass through the friction chain of the ZIGZAG and ZIGZAG PLUS mechanical Prusiks. Rope available in two colors and three lengths.











Dynamic rope



MAMBO® 10.1 mm

Dynamic rope for progression using climbing techniques

The 10.1 mm diameter MAMBO dynamic rope is designed for work at height professionals that use climbing techniques for progression. The thick sheath improves abrasion resistance.

Technical cord



SEGMENT 8 mm

Technical cord

The SEGMENT 8 mm technical accessory cord is used when creating Prusik hitches, anchors or haul systems. The EverFlex construction guarantees great flexibility and consistent performance over time. Cord available in three lengths.


Accessory cord



Cords

Accessory cords

These rugged and durable cords are for guiding a victim during rescue, or for hauling equipment. Available in four diameters, in a 120 meter roll.

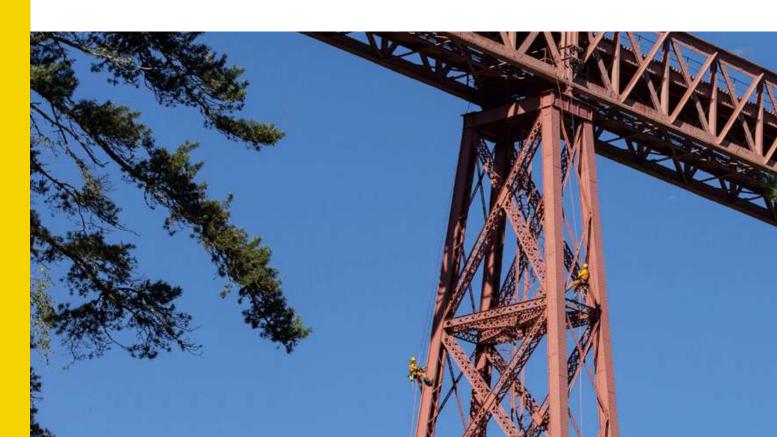



Rope protectors





PROTEC

Flexible protector

Flexible PROTEC protection helps protect a fixed rope from abrasion. It is quick and easy to install.





SET CATERPILLAR

Articulated protector

The SET CATERPILLAR articulated protector helps protect a moving rope from abrasion. The number of modules can be adapted to the terrain.



ROLL MODULE Articulated protector with rollers

ROLL MODULE is an articulated protector with rollers designed to guide a moving rope and protect it from abrasion. It offers the possibility of adapting the number of modules to the terrain and minimizing abrasion.

		Weight
PROTEC	C45 N	95 g
SET CATERPILLAR	P68	1055 g
ROLL MODULE	P49	1330 g



Structural inspections on the Viaduc de Gabarit, France © 2019 - Petzl Distribution - Vuedici.org - Lafouche - Sncf réseau - Viaduc de Garabit



























		Colors	Lengths	European certification	US certification	Russian certification	Weight per meter
Low stretch kernma	antel ropes						
	R074AA03	white					
	R074AA04	yellow					
	R074AA05	black	50 m				
	R074AA38	blue	30111				
	R074AA39	red					
	R074AA40	orange					
	R074AA09	white					
	R074AA10	yellow	100 m				
	R074AA11	black					
	R074AA12	blue					
	R074AA13	red					
	R074AA14 R074AA21	orange white		_			
	R074AA21	yellow					
	R074AA23	black					
AXIS	R074AA24	blue	200 m				
11 mm	R074AA25	red					
	R074AA26	orange					
	R074AA28	white	500 m	CE EN 1891	NFPA 1983	5.0	
1	R074AA00	white	000	type A	Technical Use	EAC	82 g
	R074AA01	yellow					
	R074AA02	black	150 ft				
	R074AA35	blue	150 ft 200 ft				
A 2 4 4 4	R074AA36	red					
	R074AA37	orange					
	R074AA06	white					
	R074AA07	yellow					
	R074AA08	black					
	R074AA41	blue					
	R074AA42	red					
	R074AA43 R074AA15	orange white					
	R074AA16	yellow					
	R074AA17	black					
	R074AA18	blue	600 ft				
	R074AA19	red					
	R074AA20	orange					
	R074AA27	white	1200 ft				
	R074BA00		10 m				
AXIS	R074BA01		20 m		NFPA 1983 Technical Use	EAC	82 g
11 mm 🕌	R074BA02	white	30 m	CE EN 1891			
with sewn	R074BA03	Willo	40 m	type A			
termination	R074BA04		50 m				
	R074BA05		60 m				
	R077AA03	white					
	R077AA04	yellow					
	R077AA05	black	50 m				
	R077AA35	blue					
	R077AA36	red					
PARALLEL	R077AA37	orange		_			
10,5 mm	R077AA09	white					
. 0,0	R077AA10	yellow					
1000	R077AA11	black	100 m	CE EN 1891	NFPA 1983		
X .	R077AA12	blue		type A	Technical Use	EAC	75 g
1 2 1 1	R077AA13	red					
18 18 18	R077AA14	orange		_			
1	R077AA21	white					
11 8 11 11 11 11	R077AA22	yellow					
	R077AA23	black	200 m				
	R077AA24	blue	233 111				
	D0774 405	red		1	1		
	R077AA25						
	R077AA26 R077AA28	orange white	500 m				



			Colors	Lengths	European certification	US certification	Russian certification	Weight per meter
Low stretch ke	rnmante	ropes						
		R078AA03	white					
		R078AA04	yellow					
		R078AA05	black					
		R078AA38	blue	50 m				
		R078AA39	red					
		R078AA40	orange					
		R078AA09	white					
		R078AA10	yellow					
		R078AA11	black	100				
		R078AA12	blue	100 m				
		R078AA13	red					
		R078AA14	orange					
		R078AA21	white					
		R078AA22	yellow					
		R078AA23	black	200 m				
/ECTOR		R078AA24	blue	200111				
12,5 mm		R078AA25	red					
2 25 📰 💯 📟 🕮		R078AA26	orange					
		R078AA28	white	500 m	CE EN 1891	NFPA 1983	EAC	111 g
		R078AA00	white		type A	General Use		1119
# 🐔 🖩 🚪 🖥		R078AA01	yellow					
		R078AA02	black	150 ft				
		R078AA35	blue	150 11				
超 🌂 🖩 🕍 🖼 🗃		R078AA36	red					
		R078AA37	orange					
		R078AA06	white					
		R078AA07	yellow					
		R078AA08	black	200 ft				
		R078AA41	blue					
		R078AA42	red					
		R078AA43	orange					
		R078AA15	white					
		R078AA16	yellow					
		R078AA17	black	600 ft				
		R078AA18	blue					
		R078AA19	red					
		R078AA20	orange					
		R078AA27	white	1200 ft				
	0.0	R079AA00	green	35 m				
NEW 2020	YY	R079AA01	orange					
FLOW		R079AA02	green	45 m	CE EN 1891 type A	ANSI Z133	-	102 g
11,6 mm		R079AA03	orange		lype A			102 g
•		R079AA04	green	60 m				
		R079AA05	orange			-		
4	a a	R080AA00	green	35 m				
NEW 2020	N N	R080AA01	orange		-			
CONTROL	8	R080AA02	green	45 m	CE EN 1891 type A	ANSI Z133	-	115 g
12,5 mm	1 6	R080AA03 R080AA04	orange		-			
	T.	R080AA04 R080AA05	green	60 m				
		CUAAUOUIT	orange	<u> </u>	<u> </u>			
Dynamic rope								
MAMBO		R32AB 200	blue	200	OF EN 200			٥٦
10,1 mm		R32AY 200	yellow	200 m	CE EN 892	-	-	65 g
			·	·	·	·		
Technical cord								
SEGMENT	t	R076AA00		50 m	05 500	NFPA 1983		
8 mm	1	R076AA03	white	100 m	CE EN 564	Escape Use	-	43 g
	į.	R076AA06		200 m				
Accessory core	d							
	4 mm	R044AA00	orange					10 g
	5 mm	R045AA00	red					10 g 15 g
OI-				120 m	CE EN 564	-	-	
Cords	6 mm	R046AA00	green					24 g


































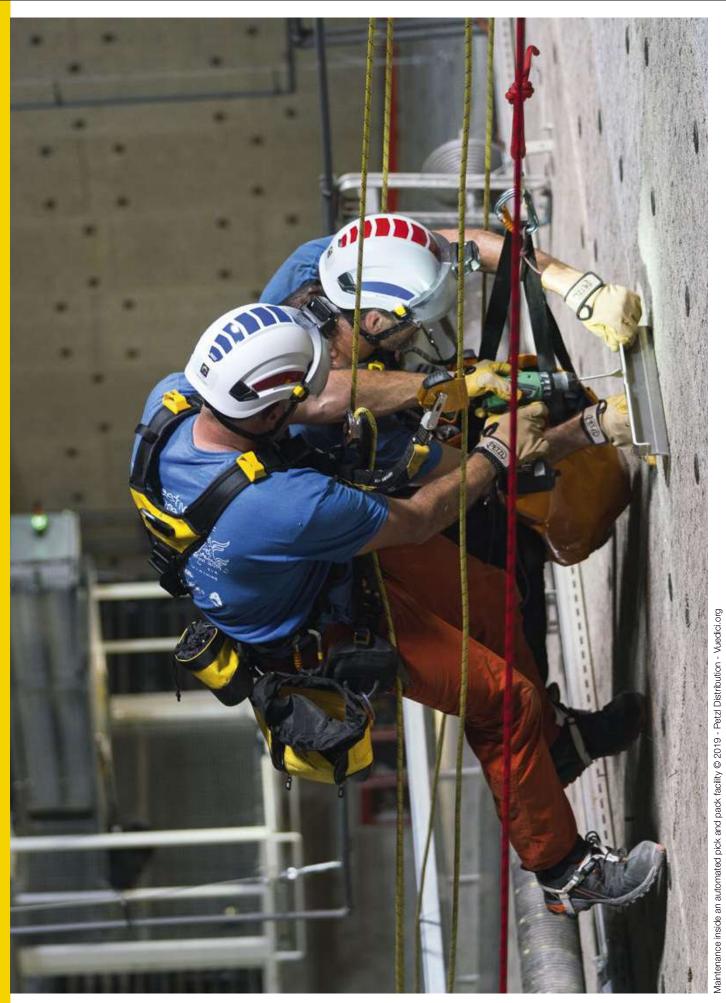



Durable packs

Robust and comfortable, these packs are designed for organizing equipment, bringing it to the worksite and carrying it in a vertical environment.



TRANSPORT 45L







BOLTBA(







Upright packs

Placed on the ground, these packs keep their shape, even when empty, and thus facilitate access to their interior.











Tree care accessories

Specific products that help with placing an access rope in a tree.







Gloves

Protective gloves











Accessories

Knife and crampons to facilitate work and movement.















Durable packs



TRANSPORT 45L

Durable large-capacity pack

The TRANSPORT is an especially comfortable and durable 45 liter backpack. It is made of PVC-free material, and its welded construction provides great strength. It is ideal for long-distance carries with its padded back panel, waistbelt and shoulder straps. It is made for use under difficult conditions, and also has an ID card pocket.



Waistbelt, shoulder straps and back panel are padded for comfort.



PORTAGE 30L

Durable medium-capacity bag

The PORTAGE is a durable and comfortable 30 liter backpack. It is made of PVC-free material, and its welded construction provides great strength. With its padded shoulder straps, it is comfortable during long carries. It is made for use under difficult conditions, and also has an ID card pocket.



PERSONNEL 15L

Durable small-capacity bag

The PERSONNEL is a durable and lightweight 15 liter backpack. It is made of PVC-free material, and its welded construction provides great strength. It is made for use under difficult conditions, and also has an ID card pocket.



PORTO

Webbing equipment loop

Webbing equipment loop attaches to a pack's internal loop for organizing equipment.



BOLTBAG

Equipment pouch

Equipment pouch for organizing a hammer, bolting gear and other equipment. It has two pockets and exterior holster.



Upright packs













Simple and durable, the BUCKET bag allows the user to store a rope and any associated equipment. It remains upright and keeps its shape, even when empty, for easy access to the contents of the bag. It is available in two colors and two versions: 25 and 35 liters.







Tree care accessories







Throw-bag

Double-layer construction gives the JET throw-bag excellent longevity. Streamlined shape facilitates passage through tree branches. It is available in three versions: 250, 300 and 350 g.






AIRLINE

Throw-line

The AIRLINE throw-line offers an excellent compromise between flexibility and rigidity, for an accurate throw without the formation of knots as it comes out of the bag. The excellent sheath-core bond maintains a round cross-section, ensuring good rope glide through the tree. It is available in two versions: 60 and 300 meters.







ECLIPSE provides easy storage for AIRLINE throw-lines and JET throw-bags. The double bottom allows two throw-lines to be stored separately. Once folded into the small bag, it all fits perfectly into the BUCKET pack.







Gloves



CORDEX

Lightweight belay/rappel gloves

These lightweight belay/rappel gloves combine the durability of a work glove with the precise fit and dexterity of a thinner glove. Double-layered leather protects the palm and other high-wear areas. The back is made of abrasion-resistant, breathable stretch nylon, ensuring comfort and fit. The low profile neoprene cuff with Velcro closure features a reinforced carabiner hole for attaching the gloves to your harness.



CORDEX PLUS

Belay/rappel gloves

These medium weight belay/rappel gloves offer extra protection without sacrificing dexterity. Double-layer leather and padding protect the palm from heat generated during long rappels or lowers. Fingertips and other high-wear areas are reinforced for increased durability. The back is made of leather with abrasion-resistant stretch nylon at key flex areas. The low profile neoprene cuff with Velcro closure features a reinforced carabiner hole for attaching the gloves to your harness.

Accessories



SPATHA

Knife with carabiner hole

The SPATHA knife is designed to accompany the worker at height during all daily tasks. The profile of the blade allows easy cutting of ropes and cords. It has a carabiner hole for easily attaching the knife to the harness. It is easy to manipulate with its textured wheel, even when wearing gloves, and can be locked in the open position.



CRAB 6

6-point crampons

Six-point crampons, adaptable to all shoe sizes, used for moving over talus and snow- and ice-covered slopes.



SPIKY PLUS

Anti-slip soles

Anti-slip soles, adaptable to all shoe sizes, used for moving over snow and frozen or slippery surfaces.



					Capacity	V	Veight	
Durable packs								
TRANSPORT 45L		S42Y 045			45		1250 g	
PORTAGE 30L	5	S43Y 030			30		850 g	
PERSONNEL 15L		S44Y 015			15		450 g	
PORTO	6	C33			-		18 g	
BOLTBAG	ť.	C11 A			-		170 g	
Upright packs								
BUCKET -		S41AY 025 (yellow) S41AR 025 (red) S41AY 035 (yellow)			25		575 g	
		S41AR 035 (red)			35 I		680 g	
Tree care accessories								
	. 0	S02Y 250			-		250 g	
JET		S02Y 300			-		300 g	
	9 9 9	S02Y 350			-		350 g	
AID! INC	3	R02Y 060 -		-	2	2.1 g/m		
AIRLINE		R02Y 300			-	2.1 g/m		
ECLIPSE	%	S03Y			-		500 g	
	g = 😊	3331					000 g	
	<i>a</i> - ⊌		Si	ze	Hand circumference	Color	Certifications	
Gloves	<i>u</i> - •		Si	ze	Hand circumference			
Gloves	- W -	K52 SN	S	8	20 cm			
Gloves		K52 SN K52 MN	S M	8 8.5	20 cm 21.5 cm			
Gloves		K52 SN K52 MN K52 LN	S M L	8 8.5 9	20 cm 21.5 cm 23 cm	Color		
		K52 SN K52 MN	S M	8 8.5	20 cm 21.5 cm	Color		
		K52 SN K52 MN K52 LN K52 XLN K52 XST K52 ST	S M L XL XS S	8 8.5 9 9.5 7.5	20 cm 21.5 cm 23 cm 24.5 cm 19 cm 20 cm	Color		
_		K52 SN K52 MN K52 LN K52 XLN K52 XST K52 ST K52 MT	S M L XL XS S M	8 8.5 9 9.5 7.5 8	20 cm 21.5 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm	Color		
		K52 SN K52 MN K52 LN K52 XLN K52 XST K52 ST K52 MT K52 LT	S M L XL XS S M L	8 8.5 9 9.5 7.5 8 8.5	20 cm 21.5 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 23 cm	Color	Certifications	
		K52 SN K52 MN K52 LN K52 XLN K52 XST K52 ST K52 MT K52 LT K52 XLT	S M L XL XS S M L	8 8.5 9 9.5 7.5 8 8.5 9	20 cm 21.5 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 23 cm 24.5 cm	Color	Certifications	
		K52 SN K52 MN K52 LN K52 XLN K52 XST K52 ST K52 MT K52 LT	S M L XL XS S M L	8 8.5 9 9.5 7.5 8 8.5	20 cm 21.5 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 23 cm	Color black beige	Certifications	
_		K52 SN K52 MN K52 LN K52 XLN K52 XST K52 ST K52 ST K52 MT K52 LT K53 SN	S M L XL XS S M L	8 8.5 9 9.5 7.5 8 8.5 9	20 cm 21.5 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 23 cm 24.5 cm	Color	Certifications	
CORDEX		K52 SN K52 MN K52 LN K52 XLN K52 XST K52 ST K52 MT K52 LT K52 XLT K53 SN K53 MN K53 LN K53 XLN	S M L XL S M L XL XL XL	8 8.5 9 9.5 7.5 8 8.5 9 9.5 8 8.5 9	20 cm 21.5 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 23 cm 24.5 cm 20 cm 21.5 cm 20 cm 21.5 cm 21.5 cm	Color black beige	Certifications	
CORDEX		K52 SN K52 MN K52 LN K52 XLN K52 XLN K52 XST K52 ST K52 MT K52 LT K53 SN K53 MN K53 LN K53 XLN K53 XLN K53 XST	S M L XL S M L XL XS	8 8.5 9 9.5 7.5 8 8.5 9 9.5 8 8.5 9	20 cm 21.5 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 23 cm 24.5 cm 23 cm 24.5 cm 20 cm 21.5 cm 21.5 cm 21.5 cm 21.5 cm 21.5 cm	Color black beige	Certifications	
CORDEX		K52 SN K52 MN K52 LN K52 LN K52 XST K52 ST K52 ST K52 MT K52 LT K53 SN K53 MN K53 LN K53 XLN K53 XST K53 ST	S M L XL S M L XL XS S M L XL S S M S	8 8.5 9 9.5 7.5 8 8.5 9 9.5 8 8.5 9	20 cm 21.5 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 23 cm 24.5 cm 23 cm 24.5 cm 20 cm 21.5 cm	black beige	Certifications	
CORDEX		K52 SN K52 MN K52 LN K52 XLN K52 XST K52 ST K52 ST K52 MT K52 LT K53 SN K53 MN K53 LN K53 XLN K53 XST K53 ST K53 MT	S M L XL S M L XL XS S M L XL XS S M	8 8.5 9 9.5 7.5 8 8.5 9 9.5 8 8.5 9 9.5 7.5 8	20 cm 21.5 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 23 cm 24.5 cm 23 cm 24.5 cm 20 cm 21.5 cm 20 cm 21.5 cm 23 cm 21.5 cm 23 cm 24.5 cm 21.5 cm 23 cm 24.5 cm 21.5 cm	Color black beige	Certifications	
CORDEX		K52 SN K52 MN K52 LN K52 XLN K52 XST K52 ST K52 MT K52 LT K53 SN K53 MN K53 LN K53 XST K53 ST K53 MT K53 LT	S M L XL S M L XL XS S M L XL XS S M L L XL XS S M L L XS S M L L XS S M L	8 8.5 9 9.5 7.5 8 8.5 9 9.5 8 8.5 9 9.5 7.5 8 8.5 9	20 cm 21.5 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 23 cm 24.5 cm 23 cm 24.5 cm 20 cm 21.5 cm 20 cm 21.5 cm 23 cm 24.5 cm 23 cm 24.5 cm 23 cm 24.5 cm 23 cm 24.5 cm	black beige	Certifications	
CORDEX		K52 SN K52 MN K52 LN K52 XLN K52 XST K52 ST K52 ST K52 MT K52 LT K53 SN K53 MN K53 LN K53 XLN K53 XST K53 ST K53 MT	S M L XL S M L XL XS S M L XL XS S M	8 8.5 9 9.5 7.5 8 8.5 9 9.5 8 8.5 9 9.5 7.5 8	20 cm 21.5 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 23 cm 24.5 cm 23 cm 24.5 cm 20 cm 21.5 cm 23 cm 21.5 cm 23 cm 24.5 cm 19 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 20 cm 21.5 cm 20 cm	black beige	Certifications CE EN 420 CE EN 388 (3133 EAC	
CORDEX		K52 SN K52 MN K52 LN K52 XLN K52 XST K52 ST K52 MT K52 LT K53 SN K53 MN K53 LN K53 XST K53 ST K53 MT K53 LT	S M L XL S M L XL XS S M L XL XS S M L L XL XS S M L L XS S M L L XS S M L	8 8.5 9 9.5 7.5 8 8.5 9 9.5 8 8.5 9 9.5 7.5 8 8.5 9	20 cm 21.5 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 23 cm 24.5 cm 23 cm 24.5 cm 20 cm 21.5 cm 20 cm 21.5 cm 23 cm 24.5 cm 23 cm 24.5 cm 23 cm 24.5 cm 23 cm 24.5 cm	black beige	Certifications	
CORDEX CORDEX PLUS Accessories		K52 SN K52 MN K52 LN K52 XLN K52 XST K52 ST K52 MT K52 LT K53 SN K53 MN K53 LN K53 XLN K53 XST K53 ST K53 MT K53 LT K53 LT	S M L XL S M L XL XS S M L XL XS S M L L XL XS S M L L XS S M L L XS S M L	8 8.5 9 9.5 7.5 8 8.5 9 9.5 8 8.5 9 9.5 7.5 8 8.5 9	20 cm 21.5 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 23 cm 24.5 cm 23 cm 24.5 cm 20 cm 21.5 cm 23 cm 21.5 cm 23 cm 24.5 cm 19 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 20 cm 21.5 cm 20 cm	black beige	Certifications CE EN 420 CE EN 388 (3133 EAC)	
CORDEX PLUS Accessories SPATHA CRAB 6		K52 SN K52 MN K52 LN K52 XLN K52 XST K52 ST K52 MT K52 LT K53 SN K53 MN K53 LN K53 XLN K53 XST K53 ST K53 ST K53 LT K53 LT K53 ST K53 LT K53 LT K53 LT K53 XLT	S M L XL S M L XL XS S M L XL XS S M L L XL XS S M L L XS S M L L XS S M L	8 8.5 9 9.5 7.5 8 8.5 9 9.5 8 8.5 9 9.5 7.5 8 8.5 9	20 cm 21.5 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 23 cm 24.5 cm 23 cm 24.5 cm 20 cm 21.5 cm 23 cm 21.5 cm 23 cm 24.5 cm 19 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 20 cm 21.5 cm 20 cm	black beige	Certifications CE EN 420 CE EN 388 (3133 EAC	
CORDEX CORDEX PLUS Accessories		K52 SN K52 MN K52 LN K52 XLN K52 XST K52 ST K52 MT K52 ST K52 LT K53 SN K53 MN K53 LN K53 XLN K53 XLN K53 XST K53 ST K53 MT K53 LT K53 XLT	S M L XL S M L XL XS S M L XL XS S M L L XL XS S M L L XS S M L L XS S M L	8 8.5 9 9.5 7.5 8 8.5 9 9.5 8 8.5 9 9.5 7.5 8 8.5 9	20 cm 21.5 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 23 cm 24.5 cm 20 cm 21.5 cm 20 cm 21.5 cm 23 cm 24.5 cm 3 cm 24.5 cm Size	black beige	Certifications CE EN 420 CE EN 388 (3133 EAC) Color	
CORDEX CORDEX PLUS Accessories SPATHA		K52 SN K52 MN K52 LN K52 XLN K52 XST K52 ST K52 MT K52 LT K53 SN K53 MN K53 LN K53 XLN K53 XST K53 ST K53 ST K53 LT K53 LT K53 ST K53 LT K53 LT K53 LT K53 XLT	S M L XL S M L XL XS S M L XL XS S M L L XL XS S M L L XS S M L L XS S M L	8 8.5 9 9.5 7.5 8 8.5 9 9.5 8 8.5 9 9.5 7.5 8 8.5 9	20 cm 21.5 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 23 cm 24.5 cm 23 cm 24.5 cm 20 cm 21.5 cm 23 cm 21.5 cm 23 cm 24.5 cm 19 cm 23 cm 24.5 cm 19 cm 20 cm 21.5 cm 20 cm 21.5 cm 20 cm	black beige	CE EN 420 CE EN 388 (3133 EAC) Color	





































Temporary vertical lifelines and fall arrest kits


Temporary vertical lifelines and ready-to-use kits designed for belaying and fall protection.









ASAP FALL ARREST KIT



ABSORBICA-Y FALL ARREST KIT









Fall arrest and work positioning kits

Ready-to-use kit designed to protect against falls and for positioning at a workstation.



FALL ARREST AND WORK POSITIONING KIT

Rescue kit
Ready-to-use kit, designed to pick off and lower a victim.



JAG RESCUE KIT
















Temporary vertical lifelines and fall arrest kits



ASAP® VERTICAL LIFELINE

Vertical lifeline for protection against falls with ASAP mobile fall arrester ASAP VERTICAL LIFELINE is a temporary vertical lifeline designed for belaying and to protect against falls from height. It contains an ASAP mobile fall arrester, an ASAP'SORBER energy absorber, three OK TRIACT-LOCK carabiners, an ANNEAU open sling, an AXIS 11 mm rope with sewn termination and integrated energy dissipater, a weight, and a BUCKET bag. It is available in two lengths.



page 97
















ASAP® LOCK VERTICAL LIFELINE

Vertical lifeline for protection against falls with ASAP LOCK mobile fall arrester

ASAP LOCK VERTICAL LIFELINE is a temporary vertical lifeline designed for belaying and to protect against falls from height. It contains an ASAP LOCK mobile fall arrester with locking function, an ASAP'SORBER energy absorber, two OK TRIACT-LOCK carabiners, an ANNEAU open sling, an AXIS 11 mm rope with sewn termination, a weight, and a BUCKET bag. It is available in two lengths.



ASAP LOCK page 97



ASAP'SORBER



OK TRIACT-I OCK




ANNFAU



AXIS 11 mm - page 139 -





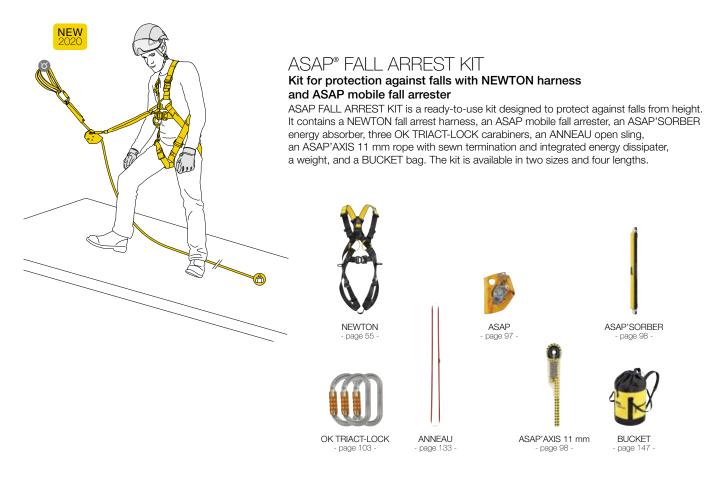



OK TRIACT-LOCK

ANNEAU

AXIS 11 mm

page 139

BUCKET


































Temporary vertical lifelines and fall arrest kits

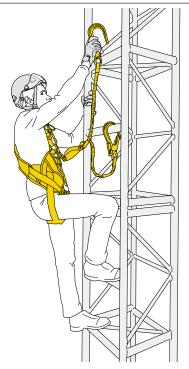

ABSORBICA-Y FALL ARREST KIT

Kit for protection against falls with NEWTON EASYFIT harness and ABSORBICA-Y MGO 150 lanyard

ABSORBICA-Y FALL ARREST KIT is a ready-to-use kit designed to protect against falls. It is optimized for work at height requiring connection to metal structures or large-diameter cables and bars. The kit contains a NEWTON EASYFIT fall arrest harness, a double lanyard with a 150 cm ABSORBICA-Y energy absorber with MGO large-opening connectors, an OK TRIACT-LOCK carabiner, a CAPTIV positioning bar, and a BUCKET bag. It is available in two sizes.



NEWTON EASYFIT



ABSORBICA-Y MGO 150 page 89




OK TRIACT-LOCK





Fall arrest and work positioning kit

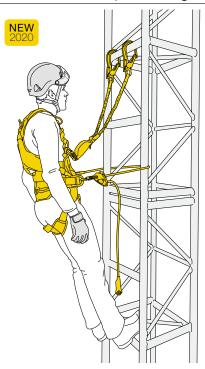

FALL ARREST AND WORK POSITIONING KIT

Fall arrest and work positioning kit with VOLT harness, ABSORBICA-Y MGO 150 lanyard, and GRILLON HOOK

FALL ARREST AND WORK POSITIONING KIT is a ready-to-use kit designed to protect against falls and for positioning at a workstation. It is optimized for work at height requiring connection to metal structures or large-diameter cables and bars. The kit contains a VOLT fall arrest and work positioning harness, a 150 cm ABSORBICA-Y double lanyard with energy absorber and MGO large-opening connectors, a 2-meter GRILLON HOOK adjustable work positioning lanyard, two OK TRIACT-LOCK carabiners, two CAPTIV positioning bars, and a BUCKET bag. It is available in two sizes.



VOLT



ABSORBICA-Y MGO 150 page 89



GRILLON HOOK




OK TRIACT-I OCK



CAPTIV



BUCKET

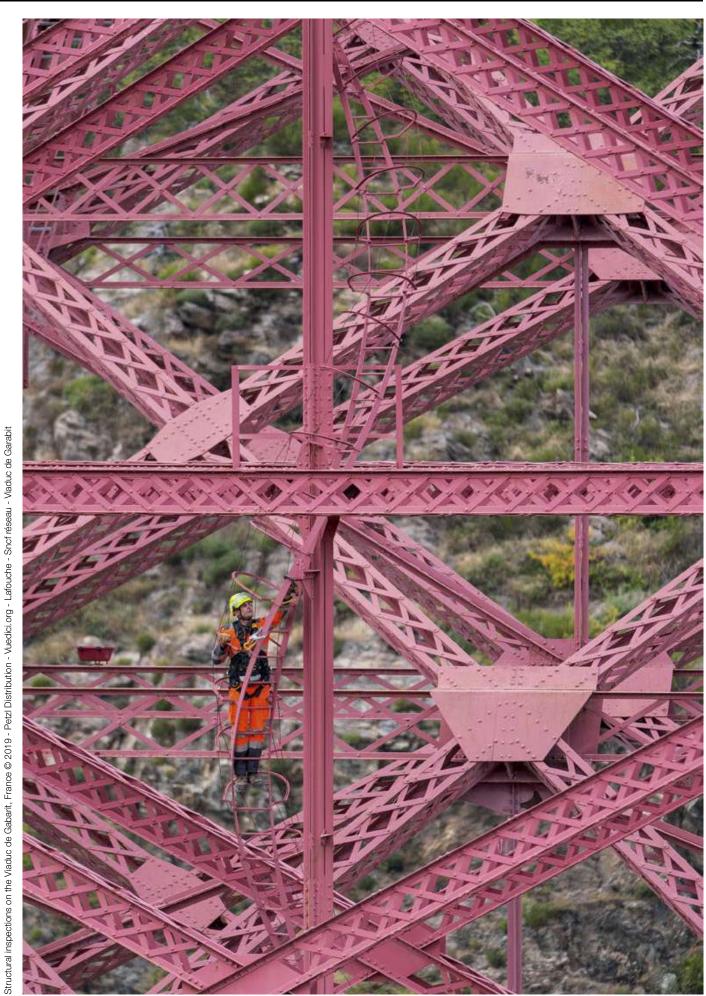








































Rescue kits



JAG RESCUE KIT

Reversible rescue kit with JAG SYSTEM haul kit and I'D EVAC descender

The JAG RESCUE KIT is a ready-to-use reversible rescue kit designed to easily pick off and lower a victim. It contains a JAG SYSTEM haul kit, a RING OPEN gated ring, an I'D EVAC descender with integrated brake, a CONNEXION FIXE 150 cm anchor strap, a BUCKET bag and an AXIS 11 mm rope with two sewn terminations. It is available in three lengths: 30, 60 and 120 m.



Ū











JAG SYSTEM - page 128 -

RING OPEN - page 106 -

I'D EVAC - page 111 -

CONNEXION FIXE - page 134 -

AXIS 11 mm - page 139 -

BUCKET - page 147 -



		Contents of kit	Harness size	Rope length	Weight
Temporary vertica	l lifelines and	fall arrost kits			
NEW 2020 ASAP	ASAP K091AB00 ASAP'SORBEF OK TRIACT-LO			10 m	2325 g
VERTICAL LIFELINE	K091AB01	AXIS 11 mm rope with sewn termination and integrated energy dissipater a weight BUCKET 25 liters		20 m	3125 g
ASAP LOCK VERTICAL	K092AA00	ASAP LOCK ASAP'SORBER 40 cm OK TRIACT-LOCK (x2) ANNEAU 150 cm		10 m	2455 g
LIFELINE	K092AA01	AXIS 11 mm with sewn termination a weight BUCKET 25 liters		20 m	3255 g
	K093AB00		1	10 m	3375 g
NEW 2020 ASAP	K093AB01	NEWTON European version ASAP ASAP'SORBER 40 cm OK TRIACT-LOCK (x3) ANNEAU 150 cm	2	10 m	3405 g
FALL ARREST KIT	K093AB02	AXIS 11 mm rope with sewn termination and integrated energy dissipater a weight BUCKET 25 liters	1	20 m	4175 g
	K093AB03		2	20 m	4205 g
	K094AA00	NEWTON European version ASAP LOCK ASAP'SORBER 40 cm OK TRIACT-LOCK (x2)	1	10 m	3505 g
ASAP LOCK FALL ARREST	K094AA01		2	10 m	3535 g
KIT	K094AA02	ANNEAU 150 cm AXIS 11 mm with sewn termination a weight BUCKET 25 liters	1	20 m	4305 g
	K094AA03		2	20 m	4335 g
ABSORBICA-Y FALL ARREST	K095AA00	NEWTON EASYFIT international version ABSORBICA-Y European version 150 cm MGO OK TRIACT-LOCK (x1)	1	_	3390 g
KIT	K095AA01	CAPTIV (x1) BUCKET 25 liters	2		3440 g
Fall arrest and wo	rk positioning	kit			
NEW 2020 FALL ARREST	K096AB00	VOLT ABSORBICA-Y European version 150 cm MGO GRILLON HOOK European version 2 m	1	_	4810 g
AND WORK POSITIONING KIT	K096AB01	OK TRIACT-LOCK (x2) CAPTIV (x2) BUCKET 25 liters	2	-	4890 g
Rescue kit					
	K090AA00	IAC SYSTEM		30 m	4300 g
JAG RESCUE KIT	K090AA01	JAG SYSTEM RING OPEN I'D EVAC CONNEXION FIXE 150 cm AXIS 11 mm with sewn termination	-	60 m	6600 g
	K090AA02	BUCKET 25 or 35 liters		120 m	11300 g








































The Petzl headlamp range covers the full spectrum of professional needs, from intensive to occasional use, and for different work environments that require varying degrees of brightness.

Professions	Industrial, maintenance, work at height and inspection	Industry, energy and networks, construction, maintenance	Concerts and shows, artisans, small maintenance jobs
Frequency of use	Intensive	Frequent	Occasional to frequent
User needs	- CONSTANT LIGHTING - ATEX certification (except DUO S) - Very high brightness - Very long burn time - Durable - Water resistance - Working in teams	- CONSTANT LIGHTING (except PIXA Z1) - ATEX or HAZLOC certification - Long burn time - Durable - Water resistance	- REACTIVE LIGHTING and STANDARD LIGHTING - High brightness - Lightweight and compact - Very long burn time - Multiple lighting colors - Versatile - Resistant to water spray
Petzl solutions	Performance headlamps	Compact, durable headlamps	Ultra-compact headlamps
	DUO S	PIXA Z1	NEW 2020 SWIFT RL PRO NEW 2020
		PIXA 3R	TACTIKKA CORE NEW 2020
	DUO Z1	PIXA 3	TACTIKKA +RGB
	DUO Z2	PIXA 2	TACTIKKA +
		PIXA 1	TACTIKKA NEW 2020
			TACTIKKA ADAPT
			e+LITE



Intelligent lighting for greater convenience and performance






This exclusive technology, developed by Petzl, instantly provides the right lighting at the right time, without any need for manual operation. Burn time is thus optimized, and the user can engage in his or her activity with peace of mind.

REACTIVE LIGHTING technology offers:

- intelligent lighting
- hands-free lighting for greater convenience and performance
- longer burn time

Available on the SWIFT RL PRO headlamp

Come face-to-face without blinding each other, for better teamwork






Once activated, the FACE2FACE function triggers a sensor that detects other DUO headlamps within 8 meters and automatically dims the lighting if they face each other. The light returns to its original intensity once the other headlamp is no longer in its line of sight.

Available on DUO S, DUO Z1 and DUO Z2 headlamps.

Choosing the energy source to fit the need






The HYBRID CONCEPT construction allows Petzl's compact headlamps to run on either the CORE rechargeable battery or three AAA/LR03 batteries, without an adapter.

- CORE rechargeable battery is an economical solution for frequent and/or intensive use
- AAA/LR03 batteries for occasional use, with very long burn time


Available on TACTIKKA CORE, TACTIKKA +RGB, TACTIKKA +, TACTIKKA and TACTIKKA ADAPT headlamps.

Compatible with all helmet types


All Petzl headlamps are designed to be worn on the head or a helmet, while allowing for tilting of the headlamp:



- on Petzl helmets, using their mounting plates



- on other helmets, using adhesive plates, available as accessories




- TACTIKKA ADAPT, the ready-to-go solution that adapts to any type of helmet

Choosing a Petzl headlamp means selecting a work tool designed to withstand the most severe conditions of use, while ensuring maximum reliability.

Optical quality for optimal visual comfort

Petzl headlamps ensure maximum visual comfort for the user: lighting is uniform and has no bright point in the center, no spotting, no dark areas. Each batch of LEDs is tested and selected according to proper color homogeneity, low energy consumption, and high luminous flux. Each Petzl headlamp is individually inspected before leaving the factory. These operations include a test to measure lighting performance and beam homogeneity with the help of a digital camera.







Presence of a central bright spot: blinding



Presence of visual defects: lack of precision, discomfort, fatigue

Individual test of each lamp

Each model must pass particularly stringent tests:

- for shock resistance, fall resistance and crushing (including at low temperatures)
- for functional reliability (mechanical endurance)
- individual inspection and test at the end of the assembly line (final quality check)
- for water resistance




Consideration of photobiological risk

Petzl has chosen to present information in its product instructions about the risks to the eyes associated with LED lighting. For this, the company uses the IEC 62778 and EN 62471: 2008 standards, Photobiological safety of lamps and devices using lamps. This standard classifies lamps according to risk groups.

The risk groups are as follows:

- Risk group 0: no risk
- Risk group 1: low risk The product presents no risk related to exposure limits under normal usage conditions
- Risk group 2: moderate risk The reflex to look away from the lamp suffices to reduce the risk

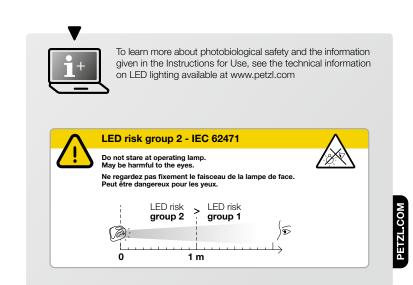


Brightness and burn time



A question of balance

Brightness and burn time are two inextricably linked parameters of any headlamp, regardless of its lighting technology. For a given quantity of energy, increasing the brightness automatically decreases burn time, and vice versa.




The different lighting technologies used in Petzl headlamps make it possible to meet your needs, depending on what you want:



Prioritizing burn time: STANDARD LIGHTING


Brightness decreases gradually as the batteries are drained. It is the most common technology.

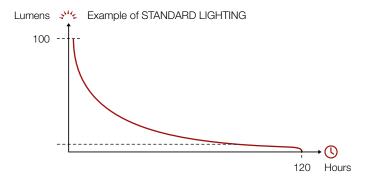



Prioritizing guaranteed brightness over time: CONSTANT LIGHTING


Brightness stays constant as the batteries drain. When the batteries are almost drained, the headlamp switches automatically to reserve lighting, with weaker output that prolongs lighting time.





• Optimized lighting performance: REACTIVE LIGHTING

Brightness varies according to the user's need. Intelligent lighting thus optimizes battery life, offering greater burn time.

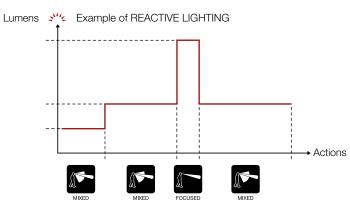

Brightness: the shape of the beam directly affects lighting distance

Lighting distance depends directly on brightness, but mainly on the shape of the beam. In fact, given the same brightness, lighting distance will vary depending on the shape of the beam.

Petzl indicates the different lighting modes available for each headlamp. These modes correspond to specific conditions of use: close-range work, moving around, seeing at a distance.







MAX LARGE BRIGHTNESS









X FOCUSED MAX NESS DISTAN

Hazardous areas

If an explosion hazard is identified in an environment, the hazardous areas are classified as areas at risk, depending on the prevalence and type of combustible, gas or dust. All of the materials used in these zones must conform with current regulations for this type of zone (ATEX and/or HAZLOC).

How to read an ATEX marking

Example: DUO Z1

⟨£x⟩ II 2 G	Ex ib	IIB	T4	Gb
⟨€x⟩ II 2 D	Ex ib	IIIB	T135°	Db

II 2 G ATEX CODING					
⟨£x⟩	II	2	G	D	
	Equipment group	Equipment category			
	Lumining	M1 : energised			
EU	I : mining	M2 : de-energised*			
Explosive atmosphere			Gas	Dust	
symbol		1 : very high protection	0	20	
	II : non-mining	2 : high protection	1	21	
		3 : normal protection	2	22	

Ex ib ELECTRICAL PROTECTION CONCEPTS					
Standard Code Zone					
	Ex ia		0	20	
60079-11	Ex ib	Intrinsic Safety	1	21	
	Ex ic		2	22	

^{*} in presence of explosive atmosphere

IIB GAS GROUPS				
Gas group	Representative test gas			
I	Methane (mining only)			
IIA	Propane			
IIB	Ethylene			
IIC	Hydrogen			

IIIB DUST GROUPS			
Dust group	Representative test dust		
IIIA	Combustible flyings		
IIIB	Non-conductive dust		
IIIC	Conductive dust		

Gases are classified according to the ignitability of gas-air mixture. Refer to IEC/EN 60079-20-1 for classification of common gases and vapors.

T4 / T135° TEMPERATURE CLASS				
T class	Maximum surface temperature			
T1	450°C			
T2	300°C			
Т3	200°C			
T4	135°C			
T5	100°C			
Т6	85°C			

Gb / Db EQUIPMENT PROTECTION LEVEL				
Equipment protection level	Zone			
Ga	0			
Gb	1			
Gc	2			
Da	20			
Db	21			
Dc	22			
Ma	energised*			
Mb	de-energised*			

 $[\]textbf{G} = \text{Gas, } \textbf{D} = \textbf{D} \text{ust, } \textbf{M} = \text{Mining}$


^{*} in presence of explosive atmosphere



Classification of ATEX / HAZLOC zones

Explosive atmosphere	Gas type c	ombustible	Dust type combustible		
·	ATEX	HAZLOC	ATEX	HAZLOC	
Permanent or long-term	ZONE 0	Class I Div 1	ZONE 20	Class II Div 1	
Occasional	ZONE 1	Class I Div 1	ZONE 21	Class II Div 1	
Accidental	ZONE 2	Class I Div 2	ZONE 22	Class II Div 2	

Example of ATEX zone (gas type combustible)





The IP Protection Index



The IP Protection Index is an international standard. This rating classifies the level of protection offered by equipment against ingress by solids (e.g. dust) and liquids (e.g. water, oil). The most frequent indexes for headlamps are:

- IPX4 for water-resistant
- IPX7 for waterproof
- IP67 dustproof and waterproof

Understanding the protection index



Level of protection against solid objects

I P 6 7 → Level of protection against liquids

Protection	against	solid	objects
------------	---------	-------	---------

- X = Not measured
- 0 = Not protected
- 1 = Protected against projection of solids \geq 50 mm in diameter
- 2 = Protected against projection of solids ≥ 12.5 mm in diameter
- 3 = Protected against projection of solids ≥ 2.5 mm in diameter
- 4 =Protected against projection of solids ≥ 1 mm in diameter
- 5 = Protected against dust (limited ingress, no harmful deposits)
- 6 = Completely protected against dust

Protection against liquids

- X = Not measured
- 0 = Not protected
- 1 = Protected against vertically falling water drops
- 2 = Protected against water drops (15° from vertical)
- 3 = Protected against rain (60° from vertical)
- 4 = Protected against splashing water
- 5 = Protected against water jets
- 6 = Protected against powerful water jets
- 7 = Temporary immersion (-1 meter for 30 minutes)
- 8 = Prolonged immersion (deeper than 1 meter for period defined by manufacturer)
- 9 = Prolonged immersion (deeper than 1 meter) and protection against pressure-washing

Choosing your Petzl headlamp for hazardous areas in conformity with regulations

			(Ex) ATEX	Hazloc	IP67 -1m WATER-PROOF	BATTERIES INCLUDED	RECHAR- GEABLE
DUO Z1	Fra. Sie	E80BHR E80BHR UK	ATEX zone 1/21 II 2 GD Ex ib IIB T4 Gb IIIB T135° C Db Ambient temperature: -20° C to +40° C	-	•	-	•
DUO Z2	NE HALLO SE CO	Е80АНВ	ATEX zone 2/22 II 3 GD Ex ic IIB T4 Gc IIIB T135° C Dc Ambient temperature: -20° C to +40° C	-	•	•	-
PIXA Z1	PRID.	E78DHB 2	ATEX zone 1/21 II 2 GD Ex ib IIB T4 Gb IIIB T135° C Db Ambient temperature: -20° C to +40° C	-	•	•	-
PIXA 3R	PRIZE OF	E78CHR 2	ATEX zone 2/22 II 3 GD Ex ic IIB T4 Gc IIIC T135° C Dc Ambient temperature: -30° C to +40° C	-	•	-	•
PIXA 3	rt.	E78CHB 2	ATEX zone 2/22 II 3 G Ex nA ic IIB T4 Gc, II 3 D Ex tc IIIC T135° C Dc Ambient temperature: -30° C to +40° C	-	•	•	-
	pera	E78CHB 2UL	-	HAZLOC Class I Div 2 Class II Div 2	•	•	-
PIXA 2	The state of the s	E78BHB 2	ATEX zone 2/22 II 3 G Ex nA ic IIB T4 Gc, II 3 D Ex tc IIIC T135° C Dc Ambient temperature: -30° C to +40° C	-	•	•	-
	pear	E78BHB 2UL	-	HAZLOC Class I Div 2 Class II Div 2	•	•	-
PIXA 1	PEZZ	E78AHB 2	ATEX zone 2/22 II 3 G Ex nA ic IIB T4 Gc, II 3 D Ex tc IIIC T135° C Dc Ambient temperature: -30° C to +40° C	-	•	•	-
		E78AHB 2UL	-	HAZLOC Class I Div 2 Class II Div 2	•	•	-

Headlamp specifications





MAX BRIGHTNESS

Brightness is the total quantity of light emitted by a lamp. It is expressed in lumens. The greater the quantity of light, the better you see. The value indicated is that of the most powerful lighting level (MAX POWER).



LOCK

LOCK function to avoid accidentally turning it on during transit or storage.



MAX DISTANCE

Lighting distance is linked to brightness and beam shape. It is expressed in meters and indicates the range of usable lighting. The value indicated is the maximum value.



Headlamp works with the rechargeable CORE battery or AAA/LR03 batteries.



MAX AUTONOMY

Burn time expresses the length of time a headlamp functions with power sufficient for carrying out an activity. It is expressed in hours. The value indicated is the maximum value.



Petzl headlamps that work with rechargeable batteries.



RESERVE

When the battery is almost drained, the headlamp switches automatically to reserve lighting to guarantee minimum lighting for several hours.



Petzl headlamps that work with regular batteries (included)



LARGE

Flood beam designed for proximity lighting, to see up close or around the feet. The wide angle provides a very wide and comfortable field of vision.



Headlamp meeting ATEX certification requirements for work in hazardous environments.



MIXED

Mixed beam consists of a flood beam and a focused component, allowing both proximity lighting and longer-range vision for moving around.



HAZLOC

Headlamp meeting HAZLOC certification requirements for work in hazardous environments.



FOCUSE

Narrow beam allows focused lighting on a target in order to see objects or people at a distance.



INGRESS

The IP rating on a headlamp guarantees its degree of watertightness:

IPX4: water-spray and weather resistant IPX7: resistant to temporary immersion (-1 meter for 30 minutes)

IP67: resistant to dust and temporary immersion (to 1 meter for 30 minutes)





RED

Red lighting for more comfortable night vision. This lighting allows good vision without blinding the user or members of a group.



The weight indicated is that of the headlamp with its energy source (regular or rechargeable batteries).



RGB

Red, green and blue lighting allows the user to better see contrasts in the lit object in certain situations.



2 m

Resistance to falls (2 m).



WHITE / RED STROBE

Red and/or white strobe lighting allows you to signal and be more easily located, for example in an emergency.



80 kg


Resistance to crushing (80 kg).



Petzl patented function allows users to be face-to-face without blinding one another.




Better resistance to chemicals.

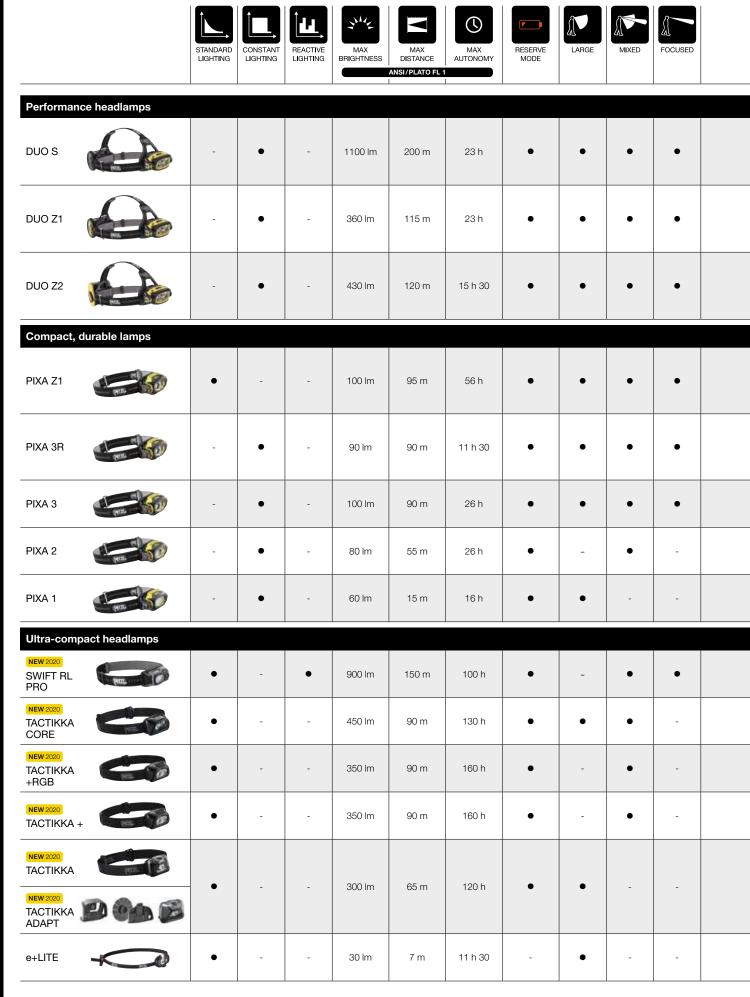



RED LIGHTING	RGB LIGHTING	WHITE / RED STROBE	FACE PACE FACE2FACE FUNCTION	LOCK UNLOCK	HYBRID CONCEPT	RECHAR- GEABLE	BATTERIES INCLUDED	(Ex) ATEX	Hazloc	INGRESS PROTECTION	WEIGHT
-	-	-	•	•	-	• wall	-	-	-	IP67	370 g
-	-	-	•	•	-	• wall	-	ATEX zone 1/21 II 2 GD Ex ib IIB T4 Gb IIIB T135° C Db Ambient temperature: -20° C to +40° C	-	IP67	370 g
-	-	-	•	•	-	-	4 x AA LR06	ATEX zone 2/22 II 3 GD Ex ic IIB T4 Gc IIIB T135° C Dc Ambient temperature: -20° C to +40° C	-	IP67	360 g
-	-	-	-	•	-	-	2 x AA LR06	ATEX zone 1/21 II 2 GD Ex ib IIB T4 Gb IIIB T135° C Db Ambient temperature: -20° C to +40° C	-	IP67	170 g
-	-	-	-	•	-	• wall	-	ATEX zone 2/22 II 3 GD Ex ic IIB T4 Gc IIIC T135° C Dc Ambient temperature: -30° C to +40° C	-	IP67	145 g
-	-	-	-	•	-	-	2 x AA LR06		X zone 2/22 t nA ic IIB T4 Gc c IIIC T135° C Dc nt temperature: C to +40° C HAZLOC Class I Div 2 Class II Div 2	IP67	160 g
-	-	-	-	•	-	-	2 x AA LR06	ATEX zone 2/22 II 3 G Ex nA ic IIB T4 Gc II 3 D Ex tc IIIC T135° C Dc Ambient temperature: -30° C to +40° C		IP67	160 g
-	-	-	-	•	-	-	2 x AA LR06			IP67	160 g
•	-	-	-	•	-	• USB	-	-	-	IPX4	123 g
•	-	• red	-	-	•	● USB	-	-	-	IPX4	77 g
•	•	● RGB	-	-	•	-	3 x AAA LR03	-	-	IPX4	85 g
•	-	• red	-	-	•	-	3 x AAA LR03	-	-	IPX4	85 g
•		•			•		3 x AAA LR03			IPX4	82 g
•		red			•		AAA LR03			11 7/4	70 / 73 g
•	-	white red	-	•	-	-	2 x lithium CR2032	-	-	IPX7	26 g

Durable and powerful, they are designed for intensive use in industry, maintenance and inspection.

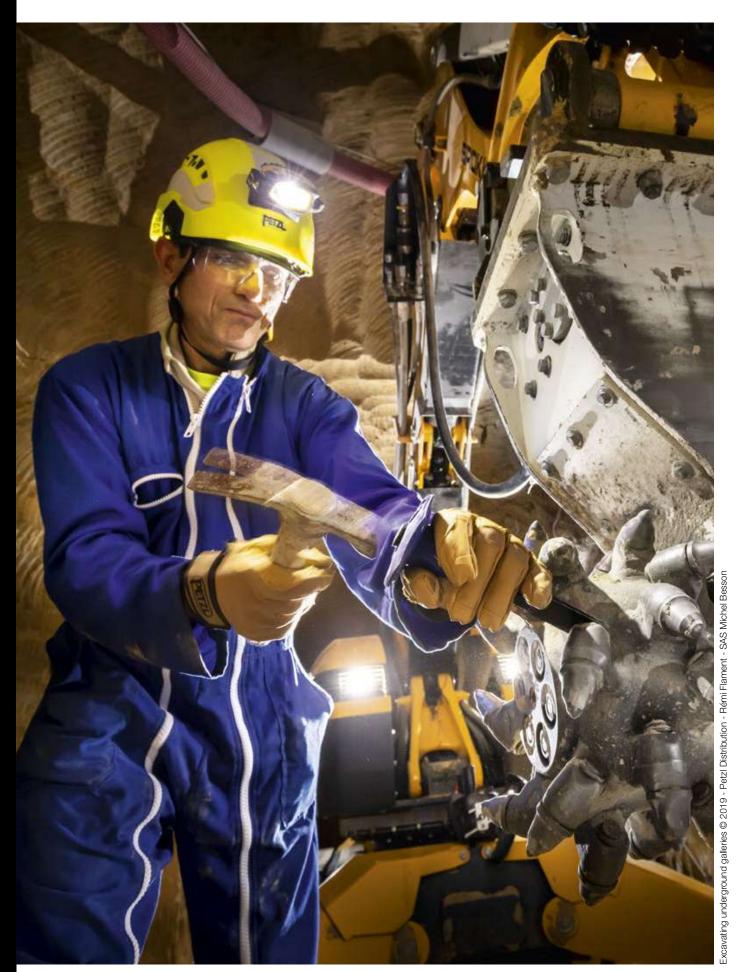



DUO S

Ultra-powerful, rechargeable multi-beam headlamp, featuring the FACE2FACE anti-glare function. 1100 lumens









DUO Z1

Powerful, rechargeable multi-beam headlamp with FACE2FACE anti-glare function, certified for use in ATEX hazardous areas. 360 lumens



х5

















DUO Z2

Powerful multi-beam headlamp that runs on standard batteries, with FACE2FACE anti-glare function, for use in ATEX hazardous areas. 430 lumens









Accessories







Pack of 5 DUO Z1



ACCU 2 DUO 21 charger















· Guaranteed lighting over time



LIGHTING

CONSTANT LIGHTING technology allows lighting to remain stable as the batteries drain. When the batteries are almost drained, the headlamp switches automatically to reserve lighting, with weaker output that prolongs lighting time.


• ATEX certified lamps for use in hazardous areas



Designed to withstand the harshest environments, DUO headlamps can be used in hazardous areas. Depending on the model, they are certified ATEX zone 1/21 or zone 2/22 (except DUO S).

Learn about choosing the ATEX headlamp that best meets your needs, page 166.

· Efficiency and comfort when working in a group





FUNCTION

The FACE2FACE function allows users to be face-to-face without blinding one another. Once activated, it triggers a sensor that detects other DUO headlamps within 8 meters and automatically dims

the lighting if they face each other. The light returns to its original intensity once the other headlamp is no longer in its line of sight.

Powerful multi-beam lamps



DUO headlamps have a multi-beam with several lighting modes, to adapt to any situation: convenient lighting for proximity, movement and long-range vision. BOOST mode allows temporary access to maximum brightness.

· Comfort, ergonomics and durability



Knob can be operated with gloves to facilitate access to different lighting modes under any conditions. DUO headlamps are durable and perfectly suited for work in harsh industrial environments, including under difficult conditions (rain, snow, mud, ice...).

Ultra-powerful lighting that runs on rechargeable battery



Powerful lighting that runs on rechargeable battery



Powerful lighting that runs on regular batteries









BOOST





MAX

DUO S

Ultra-powerful, rechargeable multi-beam headlamp, featuring the FACE2FACE anti-glare function. 1100 lumens

Ultra-powerful with 1100 lumens in BOOST mode, the DUO S is the most powerful rechargeable headlamp in the Petzl line. It is multi-beam, and has five lighting modes, making it adaptable to every situation: close-range work, proximity, movement, rapid movement and long-range vision. Featuring the FACE2FACE anti-glare function, the DUO S headlamp allows those working in a group to face each other without blinding one another, to work together more effectively. It can be worn on VERTEX and STRATO helmets, thanks to the included mounting plates.





















23h

x5

DUO Z1

Powerful, rechargeable multi-beam headlamp with FACE2FACE anti-glare function, certified for use in ATEX hazardous areas. 360 lumens

DUO Z1 is a headlamp with a maximum 360 lumens of lighting in BOOST mode that runs on a rechargeable battery. It is multi-beam, and has four lighting modes, making it adaptable to every situation: close-range work, proximity lighting, movement and long-range vision. Featuring the FACE2FACE anti-glare function, the DUO Z1 headlamp allows those working in a group to face each other without blinding one another, enabling them to work more effectively together. It can be worn on VERTEX and STRATO helmets, thanks to the included mounting plates. It meets ATEX zone 1/21 (II 2 GD Ex ib IIB T4 Gb IIIB T135 $^{\circ}$ C Db) certification requirements for work in hazardous areas.







































DUO Z2

of five batteries.

Pack of 5 DUO Z1

Pack of 5 DUO Z1 headlamps with charging rack

Powerful multi-beam headlamp that runs on standard batteries, with FACE2FACE anti-glare function, for use in ATEX hazardous areas. 430 lumens

Pack of five DUO Z1 headlamps - comes with charging rack that allows simultaneous charging

The DUO Z2 headlamp provides a powerful 430 lumens in BOOST mode, and runs on regular batteries. It is multi-beam, and has four lighting modes, making it adaptable to every situation: close-range work, proximity lighting, movement and long-range vision. Featuring the FACE2FACE anti-glare function, the DUO Z2 headlamp allows those working in a group to face each other without blinding one another, enabling them to work more effectively together. It can be worn on VERTEX and STRATO helmets, thanks to the included mounting plates. It meets ATEX zone 2/22 (II 3 GD Ex ic IIB T4 Gc IIIB T135° C Dc) certification requirements for work in hazardous areas.







Accessories



ACCU 2 DUO Z1

Rechargeable battery for DUO Z1 headlamp, usable in ATEX zone

Very high-capacity rechargeable battery, 23.68 Wh, designed for the DUO Z1 headlamp. Durable and ATEX zone 1/21 (II 2 GD Ex ib IIB T4 Gb IIIB T135° C Db) certified, it also features quick connection to the headlamp and an energy gauge for monitoring the battery's charge level.



ACCU 2

Rechargeable battery for DUO S headlamp

High-performance rechargeable battery designed for the DUO S headlamp. It is durable, and features quick connection to the headlamp and an energy gauge for monitoring the battery's charge level.



5 DUO Z1 charging rack

Charging rack, which allows simultaneous charging of five DUO Z1 headlamp batteries

EUR/US/UK compatible charging rack allows simultaneous charging of up to five ACCU 2 DUO Z1 rechargeable batteries.



ACCU 2 DUO Z1 charger

Wall charger for ACCU 2 DUO ZI rechargeable battery

EUR/US compatible quick wall charger for ACCU 2 DUO Z1 rechargeable battery.



Quick charger

Quick wall charger for ACCU 2 rechargeable batteries

Compatible quick wall charger for ACCU 2 rechargeable battery. Available in two versions: EUR/US compatible or UK compatible.



Extension cord for headlamp

Extension power cable for DUO S headlamp

The extension cord for the DUO S headlamp allows the user to reduce the weight carried on the head by moving the rechargeable battery to a pocket or on the back with the harness.



PRO ADAPT

Adhesive accessory for mounting a DUO headlamp on any type of helmet

PRO ADAPT consists of two adhesive plates for mounting a DUO Z1, DUO Z2, or DUO S headlamp on a helmet, and allows for tilting of the headlamp. The system is especially resistant to impact and moisture.




		Certifications	CONSTANT LIGHTING	Lighting modes	MAX BRIGHTNESS	MAX DISTANCE	MAX AUTONOMY	WEIGHT	
			Close-range work	80 lm	20 m	23 h			
				Proximity	180 lm	35 m	12 h 30		
				Movement	330 lm	70 m	6 h		
	E80CHR E80CHR UK	CE	•	Rapid movement	700 lm	160 m	3 h 30	370 g	
DUO S				Distance vision	450 lm	190 m	4 h 30		
				BOOST mode	1100 lm	200 m	-		4
				Reserve lighting	20) Im for 45 m	nin		
		CE, ATEX zone 1/21 II 2 GD Ex ib IIB T4 Gb IIIB T135° C Db Ambient temperature: -20° C to +40° C	•	Close-range work	70 lm	20 m	23 h	370 g	
				Proximity	170 lm	35 m	12 h		
	E80BHR E80BHR UK			Movement	300 lm	90 m	7 h		
DUO Z1	E80DHR (Pack of 5 DUO Z1)			Distance vision	140 lm	100 m	17 h		
	300 2.,			BOOST mode	360 lm	115 m	-		
				Reserve lighting	1	0 lm for 1h3	0		
				Close-range work	50 lm	17 m	15 h 30		
DUO Z2		OCE, ATEX zone 2/22 II 3 GD Ex ic IIB T4 Gc IIIB T135° C Dc Ambient temperature: -20° C to +40° C (1)	•	Proximity	120 lm	30 m	6 h 45	360 g	
	FOOALID			Movement	220 lm	80 m	2 h		
	ESUAHB			Distance vision	180 lm	120 m	2 h 45		
				BOOST mode	430 lm	115 m	-		
				Reserve lighting		10 lm for 1 h	1		

⁽¹⁾ Certifications guaranteed only with alkaline batteries

Accessories

		Weight
ACCU 2 DUO Z1	E80001	168 g
ACCU 2	E80002	168 g
5 DUO Z1 charging rack	E80003	1440 g
ACCU 2 DUO Z1 charger	E080AA00	170 g
Quick charger	E55800 / E55800 UK	145 g
Extension cord for headlamp	E55950	75 g
PRO ADAPT	E80004	48 g
































Compact, durable headlamps

Headlamps designed for frequent use, for the energy, networks, building, and maintenance markets.

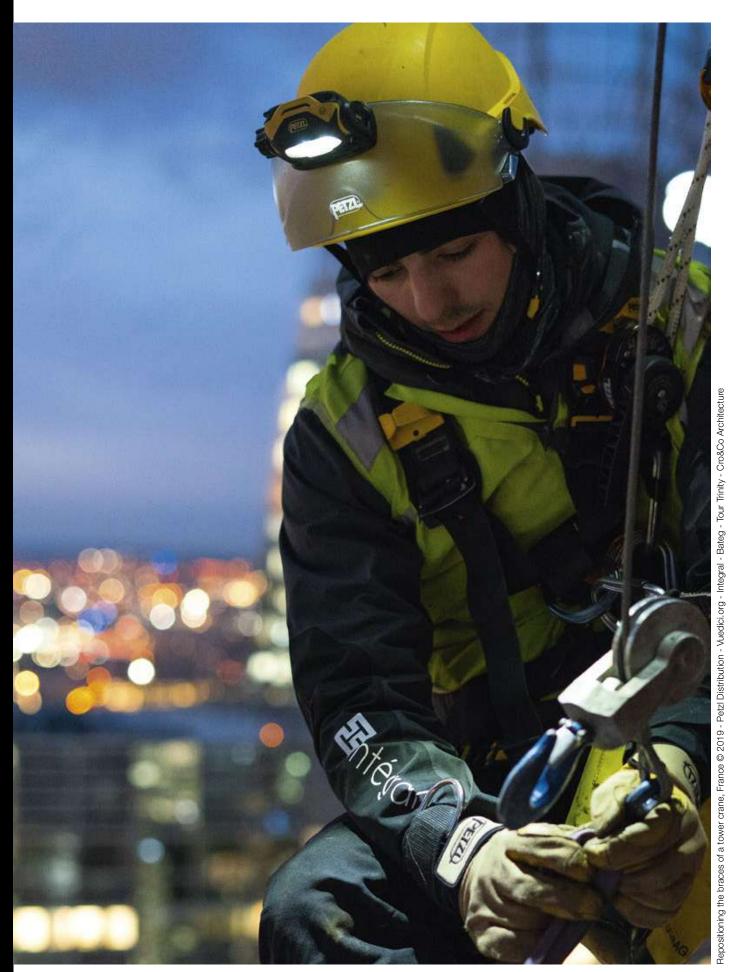



PIXA Z1

Headlamp for use in ATEX hazardous areas, suitable for proximity lighting, movement and long-range vision. 100 lumens









PIXA 3R

Rechargeable headlamp for use in ATEX hazardous areas, suitable for proximity lighting, movement and long-range vision.









Headlamp for proximity lighting, movement and long-range vision. Available in ATEX or HAZLOC versions. 100 lumens









Headlamp suitable for proximity lighting and movement. Available in ATEX or HAZLOC versions. 80 lumens









Headlamp for proximity lighting. Available in ATEX or HAZLOC versions. 60 lumens









Accessories



NXADAPT



UBBER



echargeable bat



POCHE PIXA and SWIFT RL PRO





· Guaranteed lighting over time



CONSTANT LIGHTING technology allows lighting to remain stable as the batteries drain. When the batteries are almost drained, the headlamp switches automatically to reserve lighting, with weaker output that prolongs lighting time (except PIXA Z1).

• For close-range work, movement, and long-range vision







• Lamps for use in hazardous areas: ATEX or HAZLOC certification





Designed to withstand the harshest environments, PIXA headlamps can be used in explosive atmospheres. Depending on the model, they are certified ATEX or HAZLOC.

Learn about choosing the ATEX or HAZLOC headlamp that best meets your needs, page 166.





HAZLOC

• Rugged, durable construction



Rotating and locking selector knob

Easy to use, even when wearing gloves. May be locked to prevent inadvertently turning on the light, with a storage position that protects the lens.



Great mechanical strength

Shocks, falls, crushing: these lamps endure the daily rigors of a professional work site.

• For close-range work and movement



Waterproof and chemical resistant

PIXA headlamps are waterproof (IP 67) and have been tested for resistance to various chemicals.

For close-range work











BRIGHTNESS





PIXA® Z1

Headlamp for use in ATEX hazardous areas, suitable for proximity lighting, movement and long-range vision. 100 lumens

The PIXA Z1 headlamp is durable and versatile. The multi-beam adapts to all situations: close-range work, movement, and long-range vision. It meets ATEX zone 1/21 (II 2 GD Ex ib IIB T4 Gb IIIB T135° C Db) certification requirements for work in hazardous areas.













PIXA® 3R

Rechargeable headlamp for use in ATEX hazardous areas, suitable for proximity lighting, movement and long-range vision. 90 lumens

The PIXA 3R headlamp is a durable, rechargeable headlamp suitable for frequent use by professionals. The multi-beam adapts to all situations: close-range work, movement, and longrange vision. CONSTANT LIGHTING technology: brightness does not gradually decrease as the batteries are drained. It meets ATEX zone 2/22 (II 3 GD Ex ic IIB T4 Gc IIIC T135° C Dc) certification requirements for work in hazardous areas.











BRIGHTNESS





26h AUTONOMY

PIXA® 3

Headlamp for proximity lighting, movement and long-range vision. Available in ATEX or HAZLOC versions. 100 lumens

The PIXA 3 headlamp is durable and versatile. The multi-beam adapts to all situations: close-range work, movement, and long-range vision. CONSTANT LIGHTING technology: brightness does not decrease gradually as the batteries are drained. Available in two versions: ATEX zone 2/22 (II 3 GD Ex nA ic IIB T4 Gc tc, IIIC T135° C Dc) or HAZLOC Class I Div 2 and Class II Div 2.











MAX AUTONOMY

PIXA® 2

Headlamp suitable for proximity lighting and movement. Available in ATEX or HAZLOC versions. 80 lumens

The PIXA 2 is a durable headlamp offering lighting that allows the user to work comfortably on tasks close at hand or to move around safely. CONSTANT LIGHTING technology: brightness does not decrease gradually as the batteries are drained. Available in two versions: ATEX zone 2/22 (II 3 GD Ex nA ic IIB T4 Gc tc, IIIC T135° C Dc) or HAZLOC Class I Div 2 and Class II Div 2.









DISTANCE



PIXA® 1

Headlamp for proximity lighting. Available in ATEX or HAZLOC versions. 60 lumens

The PIXA 1 is a durable headlamp offering lighting that allows the user to work comfortably on tasks close at hand. CONSTANT LIGHTING technology: brightness does not decrease gradually as the batteries are drained. Available in two versions: ATEX zone 2/22 (II 3 GD Ex nA ic IIB T4 Gc tc, IIIC T135° C Dc) or HAZLOC Class I Div 2 and Class II Div 2.





Accessories



PIXADAPT

Accessory for mounting a PIXA or SWIFT RL PRO headlamp on a helmet

The PIXADAPT is a piece that allows the user to mount or unmount a PIXA or SWIFT RL PRO headlamp on a helmet anytime, and still keeps the option of adjusting the tilt of the headlamp. PIXADAPT is compatible with Petzl helmets with or without eye shield. For other helmets, verify compatibility with the helmet manufacturer



RUBBER

Rubber headband for PIXA or SWIFT RL PRO headlamp, compatible with all helmet types

The RUBBER headband adapts to all helmets on the market and holds a PIXA or SWIFT RL PRO headlamp securely in position.



Rechargeable battery for PIXA® 3R

930 mAh Lithium-Ion Polymer rechargeable battery

Rechargeable Lithium-Ion polymer battery, 930 mAh, recharges separately or on the headlamp, for quick charge.



POCHE PIXA® & SWIFT RL PRO

Carry pouch for PIXA and SWIFT RL PRO headlamps

Accessories

		Weight
PIXADAPT	E78005	20 g
RUBBER	E78002	-
Rechargeable battery for PIXA 3R	E78003	37 g
POCHE PIXA & SWIFT RL PRO	E78001	44 g



		Certifications	CONSTANT	Lighting modes	MAX BRIGHTNESS	MAX DISTANCE	MAX AUTONOMY	WEIGHT	
		CE,		Close-range work	30 lm	15 m	56 h		
1 6	E78DHB 2	ATEX zone 1/21 II 2 GD Ex ib IIB T4 Gb		Movement	70 lm	50 m	23 h	170 a	
PIXA Z1	E/OUND 2	IIIB T135° C Db Ambient temperature: -20° C to +40° C	_	Distance vision	100 lm	95 m	16 h	170 g	
11/421		(1)		Reserve lighting		5 lm for 20 h	1		
				STANDARD setting					
				Close-range work	20 lm	15 m	11 h 30		
				Movement	55 lm	45 m	5 h		
				Distance vision	90 lm	90 m	3 h 30		
				Reserve lighting	1	0 lm for 1h3	0		
				MAX AUTONOMY setting					
Person Sul		CE, ATEX zone 2/22		Close-range work	20 lm	15 m	11 h 30		
	E78CHR 2	II 3 GD Ex ic IIB T4 Gc IIIC T135° C Dc	•	Movement	20 lm	30 m	11 h 30	145 g	
		Ambient temperature: -30° C to +40° C		Distance vision	20 lm	50 m	11 h 30		
PIXA 3R				Reserve lighting	1	0 lm for 1h3	0		
				MAX POWER setting	R setting		-		
				Close-range work	90 lm	25 m	3 h		
				Movement	90 lm	55 m	3 h		
				Distance vision	90 lm	90 m	3 h 30		
				Reserve lighting	1	10 lm for 1h30			
	E78CHB 2	CE, ATEX zone 2/22 II 3 G Ex nA ic IIB T4 Gc, II 3 D Ex tc IIIC T135° C Dc Ambient temperature:		Close-range work	20 lm	15 m	26 h		
Term Su		-30° C to +40° C		Movement	60 lm	45 m	6 h 30	160 g	
PIXA 3	E78CHB 2UL	CE, HAZLOC Class I Div 2 and Class II Div 2		Distance vision	100 lm	90 m	3 h 30	, 50 g	
		(1)		Reserve lighting	1	0 lm for 13	h		
N S	CE, ATEX zone 2/22 II 3 G Ex nA ic IIB T4 Gc, II 3 D Ex tc IIIC T135° C Dc Ambient temperature: -30° C to +40° C (1)	•	Close-range work	20 lm	25 m	26 h	160 g		
PIXA 2		CE,		Movement	80 lm	55 m	3 h 30		
	E78BHB 2UL	HAZLOC Class I Div 2 and Class II Div 2 (1)		Reserve lighting	1	0 lm for 13	h		
PIXA 1	E78AHB 2	CE, ATEX zone 2/22 II 3 G Ex nA ic IIB T4 Gc, II 3 D Ex tc IIIC T135° C Dc Ambient temperature: -30° C to +40° C (1)	•	Close-range work	20 lm	10 m	16 h	160 g	
	E78AHB 2UL	CE, HAZLOG Class I Div 2		Movement	60 lm	15 m	3 h 30		
E/8AHB		and Class II Div 2		Reserve lighting	10	0 lm for 6 h	30		

⁽¹⁾ Certifications guaranteed only with alkaline batteries





























Practical, lightweight headlamps, for occasional to frequent use, for professionals working at concerts and shows, in workshops, on small maintenance jobs...





SWIFT RL PRO

Ultra-powerful, lightweight rechargeable headlamp with multi-beam and REACTIVE LIGHTING technology, for proximity and distance vision. White lighting, or red to ensure nighttime stealth. 900 lumens







TACTIKKA CORE

Compact rechargeable headlamp with multi-beam, for proximity and distance vision. White lighting, or red to ensure nighttime stealth. 450 lumens







TACTIKKA +RGB

Compact headlamp with mixed beam for proximity and distance vision. White or red/green/blue lighting to ensure stealth. 350 lumens







TACTIKKA +

Compact headlamp with mixed beam for proximity and distance vision. White lighting, or red to ensure nighttime stealth. 350 lumens







TACTIKKA

Compact headlamp with flood beam for proximity lighting. White lighting, or red to ensure nighttime stealth. 300 lumens







TACTIKKA ADAPT

TACTIKKA headlamp without headband and with mounts for use on any type of helmet. 300 lumens











e+LITE

Ultra-compact emergency headlamp. 30 lumens





Accessories







POCHE PIXA & SWIFT RL PRO































SWIFT RI PRO

Ultra-powerful, lightweight rechargeable headlamp with multi-beam and REACTIVE LIGHTING technology, for proximity and distance vision. White lighting, or red to ensure nighttime stealth. 900 lumens

Designed for the workshop, small maintenance jobs, or concerts and shows, the SWIFT RL PRO rechargeable headlamp offers 900-lumen brightness. With REACTIVE LIGHTING technology, a sensor analyzes the ambient light and automatically adjusts headlamp brightness to user requirements. It also has red lighting to ensure stealth. SWIFT RL PRO is intuitive, with a single button for easy control over all lamp functions. The five-level gauge allows precise monitoring of the battery charge level. The lamp is compatible with Petzl helmets, and mounting accessories allow it to be attached to any kind of helmet.



REACTIVE

Longer burn time, greater visual comfort and less manual operation with REACTIVE LIGHTING mode: the light sensor automatically adjusts brightness and beam pattern, optimizing battery usage.



Ultra-bright and lightweight: 900 lumens at only 123 g.



SWIFT RL PRO is compatible with Petzl helmets. Mounting accessories allow the lamp to be attached to any kind of helmet.

Accessories











ACCU SWIFT RL PRO

Rechargeable battery for SWIFT RL PRO headlamp

High-capacity Lithium-Ion 2350 mAh rechargeable battery for the SWIFT RL PRO headlamp. It guarantees excellent lighting performance, even at low temperatures. It charges directly via built-in micro USB port and has a charging indicator light.

POCHE PIXA® & SWIFT RL PRO

Carry pouch for PIXA and SWIFT RL PRO headlamps

PIXADAPT

Accessory for mounting a PIXA or SWIFT RL PRO headlamp on a helmet

The PIXADAPT is a piece that allows the user to mount or unmount a PIXA or SWIFT RL PRO headlamp on a helmet anytime, and still keeps the option of adjusting the tilt of the headlamp. PIXADAPT is compatible with Petzl helmets with or without eye shield. For other helmets, verify compatibility with the helmet manufacturer



Rubber headband for PIXA or SWIFT RL PRO headlamp, compatible with all helmet types

The RUBBER headband adapts to all helmets on the market and holds a PIXA or SWIFT RL PRO headlamp securely in position.







• Lighting technologies



LIGHTING

STANDARD LIGHTING

STANDARD LIGHTING technology offers an ideal compromise between power and burn time. Brightness decreases gradually as the batteries are drained.

· Simple to use



Ultra-compact headlamps are simple to use, thanks to the single ergonomic button that allows quick and easy access to functions: ON/OFF, lighting modes, levels and colors.

· Several beam types and lighting levels



Ultra-compact headlamps have different beam types: flood for close-range work, mixed for moving around or focused for distance vision. The lighting levels allow brightness and burn time to be adjusted as needed.

Red lighting



LIGHTING


Ultra-compact headlamps have red lighting to preserve night vision and stealth.

· Choose your energy source



Ultra-compact headlamps work equally well with the CORE rechargeable battery and with three AAA/LR03 batteries, without an adapter. A practical and flexible solution for managing energy requirements.

HYBRID CONCEPT

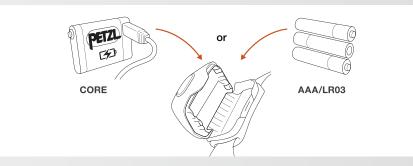

• For frequent use

• For occasional use



LIGHTING

With red, green, blue lighting



With red lighting

RED













TACTIKKA® CORE

Compact rechargeable headlamp with multi-beam, for proximity and distance vision. White lighting, or red to ensure nighttime stealth. 450 lumens

Designed for the workshop, small maintenance jobs, or concerts and shows, the TACTIKKA CORE headlamp offers 450-lumen brightness. It is multi-beam, guaranteeing comfortable proximity lighting and strong performance lighting for rapid movement and distance vision. It also has red lighting to ensure stealth. TACTIKKA CORE comes with the CORE rechargeable battery and is also compatible with three AAA/LR03 batteries (not included), thanks to the HYBRID CONCEPT design. Mounting accessories allow the lamp to be attached to any kind of helmet.













BRIGHTNESS





MAX AUTONOMY

TACTIKKA® +RGB

Compact headlamp with mixed beam for proximity and distance vision. White or red/green/blue lighting to ensure stealth. 350 lumens

Designed for the workshop, small maintenance jobs, or concerts and shows, the TACTIKKA + RGB offers 350-lumen brightness and a mixed beam, for comfortable proximity lighting and rapid movement. It also has red, green or blue lighting to ensure stealth. TACTIKKA +RGB comes with 3 standard batteries and is also compatible with the CORE rechargeable battery, thanks to the HYBRID CONCEPT design. Mounting accessories allow the lamp to be attached to any kind of helmet.

















TACTIKKA® +

Compact headlamp with mixed beam for proximity and distance vision. White lighting, or red to ensure nighttime stealth. 350 lumens

Designed for the workshop, small maintenance jobs, or concerts and shows, the TACTIKKA + offers 350-lumen brightness and a mixed beam, for comfortable proximity lighting and rapid movement. It also has red lighting to ensure stealth. TACTIKKA + comes with 3 standard batteries and is also compatible with the CORE rechargeable battery, thanks to the HYBRID CONCEPT design. Mounting accessories allow the lamp to be attached to any kind of helmet.











BRIGHTNESS





MAX AUTONOMY DISTANCE

TACTIKKA®

Compact headlamp with flood beam for proximity lighting. White lighting, or red to ensure nighttime stealth. 300 lumens

Designed for the workshop, small maintenance jobs, or concerts and shows, the TACTIKKA headlamp offers 300-lumen brightness and a flood beam for comfortable proximity lighting. It also has red lighting to ensure stealth. TACTIKKA comes with three standard batteries and is also compatible with the CORE rechargeable battery, thanks to the HYBRID CONCEPT design. Mounting accessories allow the lamp to be attached to any kind of helmet.













TACTIKKA® ADAPT

TACTIKKA headlamp without headband and with mounts for use on any type of helmet. 300 lumens

TACTIKKA ADAPT is a ready-to-go lighting solution for use on any type of helmet. It consists of a TACTIKKA headlamp without a headband, a FIXATION TACTIKKA clip mount, and a KIT ADAPT adhesive mount.








DISTANCE







Ultra-compact backup headlamp









e+LITE®

Ultra-compact emergency headlamp. 30 lumens

Ultra-lightweight and highly compact, the e+LITE emergency headlamp is the one to always have with you. Thanks to its carry case, it is always ready to use and can be stored with its batteries for ten years in a backpack, a vest, or an emergency kit, or used as a back-up headlamp. Its white or red, continuous 30-lumen lighting or strobe lighting helps you to be seen. The whistle integrated in the elastic headband allows the user to signal an emergency. Weighing only 26 grams, e+LITE is an ideal emergency headlamp.



Its white or red, continuous or strobe lighting allows you to be seen and to signal an emergency.

Accessories



CORE

Rechargeable battery compatible with Petzl HYBRID headlamps

High-capacity 1250 mAh Lithium-Ion rechargeable battery for Petzl headlamps featuring the HYBRID CONCEPT design: TACTIKKA CORE, TACTIKKA, TACTIKKA + and TACTIKKA +RGB. It guarantees excellent lighting performance, even at low temperatures. It recharges directly with the integrated USB port. The CORE rechargeable battery offers an economical solution as the main power supply, or as a back-up battery.



FIXATION TACTIKKA®

Kit for mounting a TACTIKKA, TACTIKKA +, TACTIKKA +RGB or TACTIKKA CORE type headlamp on a STRATO or VERTEX helmet

FIXATION TACTIKKA is a kit that allows the user to mount or unmount a TACTIKKA, TACTIKKA +, TACTIKKA +RGB and TACTIKKA CORE headlamp on a helmet anytime, while retaining the option to adjust the tilt of the headlamp. The system is especially resistant to impact and moisture.



KIT ADAPT

Kit for mounting a TIKKA type headlamp onto a helmet

The KIT ADAPT allows the user to mount or unmount a TIKKA headlamp on a helmet anytime, while retaining the option to adjust the tilt of the headlamp.



SHELL L

Carrying case for ultra-compact headlamps

The POCHE case is for transport and protection of TACTIKKA, TACTIKKA +, TACTIKKA +, RGB and TACTIKKA CORE headlamps in any situation. The headlamp is thus always readily accessible on the waistbelt.

Accessories		Weight
ACCU SWIFT RL PRO	E810BA00	50 g
POCHE PIXA & SWIFT RL PRO	E78001	44 g
PIXADAPT	E78005	20 g
RUBBER	E78002	-

		Weight
CORE	E99ACA	23 g
FIXATION TACTIKKA	E093CA00	12 g
KIT ADAPT	E93001	30 g
SHELL L	E93990	41 g



		Certifications	STANDARD LIGHTING	REACTIVE LIGHTING	Lighting color	Lighting mode	MAX BRIGHTNESS	MAX DISTANCE	MAX AUTONOMY	WEIGHT							
						Close-range work	10 lm	12 m	100 h								
						Proximity	200 lm	55 m	5 h								
			•	-	white	Movement	550 lm	110 m	2 h								
NEW 2020						Distance vision	250 lm	95 m	4 h								
NATE .	E810AA00	CE			red	-	Visible	at 700 m fo	or 30 h	123 g							
SWIFT RL PRO						Close-range work	100 lm	35 m	10 - 50 h								
PNO						Proximity	300 lm	55 m	5 - 40 h								
			-	•	white	Movement	900 lm	150 m	2 - 30 h								
						Distance vision	550 lm	150 m	4 - 50 h								
						Proximity	6 lm	8 m	130 h								
NEW 2020					white	Movement	100 lm	45 m	12 h								
NEW 2020						Distance vision	450 lm	90 m	3 h								
POTAL ON	E099HA00	CE	•	-		Proximity	2 lm	5 m	60 h	- 77 g							
TACTIKKA CORE					red	Strobe	Visible	at 700 m fo	r 400 h								
					white	Reserve lighting		5 lm for 3 h	l								
		1 ge) CE				Proximity	6 lm	10 m	160 h								
NEW 2020	E089FA00 (black)		•	-	white - red	Movement	100 lm	45 m	30 h	85 g							
	E089FA01 (camouflage)					Distance vision	350 lm	90 m	60 h								
TACTIKKA +RGB	E089FA02 (desert)					Proximity	2 lm	5 m	60 h								
	, ,						green blue	Strobe	Visible	at 700 m fo	r 400 h						
-				-	white	Proximity	6 lm	10 m	160 h								
NEW 2020	E089EA00 (black)					Movement	100 lm	45 m	30 h								
	E089EA01 (camouflage)	CE	•			Distance vision	350 lm	90 m	60 h	85 g							
TACTIKKA +	E089EA02 (desert)					Proximity	2 lm	5 m	60 h	1							
						red	Strobe	Visible	at 700 m fo	r 400 h							
NEW 2020	E093HA00 (black)					Proximity	6 lm	10 m	120 h								
PETE S	E093HA01 (camouflage) E093HA02				white	Movement	100 lm	40 m	30 h	82 g							
TACTIKKA	(desert)	CE	•	-		Distance vision	300 lm	65 m	40 h								
							red	Proximity	2 lm	5 m	60 h						
TACTIKKA ADAPT	E094AA00 (black)				ieu	Strobe	Visible	at 700 m fo	r 400 h								
e+LITE E02)2 P4 CE	CE •	•	-			Proximity	13 lm	6 m	12 h 30						
	E02 P4					white	Movement	30 lm	7 m	3 h							
							Strobe	Visible at 100 m for 95 h		26 g							
							red	Proximity	Visible	at 100 m fo	or 15 h						
													160	Strobe	Visible	at 100 m fo	or 70 h



Product	Reference	Page
ABSORBICA NEW 2020	L010AA00	90
ABSORBICA-I NEW 2020	L011AA00 / L013AA01	3/89
ABSORBICA-I VARIO NEW 2020	L016AA00	3/89
ABSORBICA-Y NEW 2020	L012AA00 / L014AA01	3/89
ABSORBICA-Y FALL ARREST KIT	K095AA00/01	154
ABSORBICA-Y MGO NEW 2020	L012BA/CA / L014BA/CA	3/28/89
NEW 2020 ABSORBICA-Y TIE-BACK	L015AA00 / L015BA00	3/89
ACCU 2	E80002	174
ACCU SWIFT RL PRO NEW 2020	E810BA00	184
ACCU 2 DUO Z1	E80001	174
AIRLINE	R02Y 060/300	147
Am'D	M34A	103
Am'D PIN-LOCK	M34A PL	105
AMPOULE BAT'INOX	G103AA00	132
AMPOULE COLLINOX	G101AA00	132
ANNEAU	C40	133
ASAP (NEW 2020)	B070AA00	4/97
ASAP'AXIS 11mm NEW 2020	R074DA00/01/02/03/04/05	4/98
NEW 2020 ASAP FALL ARREST KIT	K093AB00/01/02/03	153
NEW 2020 ASAP VERTICAL LIFELINE	K091AB00/01	152
ASAP LOCK	B071BA00	97
ASAP LOCK FALL ARREST KIT	K094AA00/01/02/03	153
ASAP LOCK VERTICAL LIFELINE	K092AA00/01	152
ASAP'SORBER NEW 2020	L71AA00 / L71AA01	4/98
NEW 2020 ASAP'SORBER AXESS	L071CB00	4/98
ASCENSION	B17ALA/LN/RA/RN	120
ASCENTREE	B19AAA	121
ASTRO BOD FAST	C083AA / C083BA	61
ASTRO SIT FAST	C085AA00/01/02	61
AVAO BOD	C071AA/CA	59
AVAO BOD FAST AVAO SIT	C071BA/DA C079AA	
AVAO SIT FAST	C079BA	59
AXIS 11 mm	R074AA / R074BA	139
BALACLAVA	A016CA00/01	80
BASIC	B18BAA	122
BAT'INOX	G102AA00	132
BEANIE	A016BA00/01	80
BERMUDE	C80	66
Bm'D	M032AA00/01	104
BOLTBAG	C11 A	146
BUCKET	S41AY / S41AR	147
C	L (OOO A A OO	15-
CAPTIV	M093AA00	106
CAPTIV ADJUST NEW 2020	M095AA00	4/106
CAPTIVO NEW 2020	M094AA00	4/106
CARITOOL	P042AA00/01	67
THEOT/AID	C98A	65
CHEST'AIR		115
CHICANE	D022CA00	
CHICANE	P36AA / P36AS / P36AH	132
CHICANE		

Product	Reference	Page
CONNEXION FIXE NEW 2020	G010AA00/01/02	5/134
CONNEXION VARIO NEW 2020	G011AA00/01	5/134
CONTROL 12,5 mm NEW 2020	R080AA	5/24/139
CORDEX	K52	148
CORDEX PLUS	K53	148
CORE	E99ACA	188
CRAB 6	64160	148
CROLL S / L	B16BAA / B016AA00	121
D		
DELTA	P11	106
DEMI ROND	P18	106
DUOS	E80CHR	173
DUO Z1	E80BHR	173
DUO Z1 (x5)	E80DHR	
DUO Z2	E80AHB	173
E		
e+LITE	E02 P4	188
EASHOOK OPEN	M043AA00/01	92/105
ECLIPSE	S03Y	147
EXO AP HOOK	D30AB 015	38/116
F		
FALCON	C038AA00/01/02/03/04	65
FALCON ASCENT	C038BA00/01	65
FALCON MOUNTAIN	C038CA00/01	65
NEW 2020 FALL ARREST AND WORK POSITIONING KIT	K096AB00/01	154
FIXATION TACTIKKA	E093CA00	188
FIXE	P05W / P05WN	127
FLOW 11,6 mm NEW 2020	R079AA	5/24/139
FOOTAPE	C47A	120
FOOTCORD	C48A	120
FREINO Z NEW 2020	M042BA00	105
G		
GEMINI	P66A	127
GO	P15	106
GRILLON	L052AA	87/134
GRILLON HOOK	L052BA / L052CA	87
GRILLON MGO	L052DA00/01	87
GRILLON PLUS	L052EA00/01	87
Н		
HUIT	D02	116
1		1
I'D EVAC	D020CA00/01	48/111
I'D L	D020BA00/01	111
I'D S	D020AA00/01	111
IGUANE	L001AA00/01	92
		1
JAG	P45	128
JAG RESCUE KIT	K090AA00/01/02	40/156
JAG SYSTEM	P044AA00/01/02	128
JAG TRAXION	P54	128
JANE	L50 60/100/150	90
JET	S02Y 250/300/350	147
KIT ADAPT	E02001	100
KNEE ASCENT CLIP	E93001 D022EA00	188
KNEE ASCENT LOOP	D022DA00	115
KOOTENAY		128
	P67	




Product	Reference	Page	Product	Reference	Page
L			ROLLCAB	P47	128
LEZARD	L01	92	ROLLCLIP A	P74 TL / P74	126
LIFT	L54	67	ROLLCLIP Z	P75 TL / P75 SL	126
LINER	A016AA00/01	80	RUBBER	E78002	180/184
LOOPING	C25	120	C		
М		'	S SECUR	C74A	121
MAESTRO S / L NEW 2020	D024AA00 / D024BA00	4/44/113	SEGMENT 8 mm	R076AA00/03/06	140
MAMBO 10.1 mm	R32AB 200 / R32AY 200	140	SEQUOIA	C069AA00/01/02	63
MGO OPEN (NEW 2020)	MGOO 60 / M080AA00	4/90/92/105	SEQUOIA SRT	C069BA00/01/02	63
MICRO SWIVEL	P58 XSO	133	SET CATERPILLAR	P68	141
MICRO TRAXION	P53	127	SHELL L	E93990	188
MICROFLIP	L33 025/040/055	91	Sm'D	M39A	104
MICROGRAB	B53A	91	SPATHA	S92AN	148
MINDER	P60A	127	SPIKY PLUS	79510 / 79520 / 79530	148
MINI	P59A	127	ST'ANNEAU	C07 24/60/120	133
MOBILE	P03A	127	STEF NEW 2020	S059AA00 / S059BA00	66
N			STRATO	A020AA00/01/02/03	77
NEST NEW 2020	S061AA00	66	STRATO HI-VIZ	A020CA00/01	77
NEWTON	C73AAA	55	STRATO VENT	A020BA00/01/02/03	77
NEWTON EASYFIT	C73JFA / C73JFN	55	STRATO VENT HI-VIZ	A020DA00/01	77
NEWTON EASYFIT HI-VIZ	C73JFV 1U/2U	55	STRING	M090AA00/01	106
0	·		STUART (NEW 2020)	M096AA00	4/106
ОК	M33A	103	SWIFT RL PRO NEW 2020	E810AA00	6/184
OMNI	M37	105	SWIVEL S / L	P58 S / P58 L	133
OXAN	M72A	104	SWIVEL OPEN	P58 SO	133
P			T		
PANTIN	B02CLA / B02CRA	121	TACTIKKA NEW 2020	E093HA00/01/02	187
PARALLEL 10,5 mm	R077AA	139	TACTIKKA ADAPT NEW 2020	E094AA00	6/187
PARTNER	P52A	126	TACTIKKA + NEW 2020	E089EA00/01/02	187
PAW	P63	133	TACTIKKA +RGB NEW 2020	E089FA00/01/02	187
PERSONNEL 15L	S44Y 015	146	TACTIKKA CORE NEW 2020	E099HA00	187
PITAGOR	C80 BR	66	TANDEM / TANDEM SPEED	P21 / P21 SPE	128
PIXA 1	E78AHB 2/2UL	179	TANGA	M92000	106
PIXA 2	E78BHB 2/2UL	179	TIBLOC	B01BN	122
PIXA 3	E78CHB 2/2UL	179	TOOLBAG	S047AA00 / S47Y S / S47Y L	67
PIXA 3R	E78CHR 2	179	TOP	C081AA00 / 01	59
PIXADAPT	E78005	180/184	TOP CROLL S / L	C081BA00 / C081CA00	61
PIXA Z1	E78DHB 2	179	TRANSPORT 45L	S42Y 045	146
POCHE PIXA	E78001	180/184	TREESBEE	C04110	134
& SWIFT RL PRO			TREESBEE SCREWLINK	C04110 M	134
PODIUM	S071AA00	61	TWIN	P65A	127
PORTAGE 30L	S43Y 030	146	V		
PORTO	C33	146	VECTOR 12,5 mm	R078AA	139
PRO ADART	P46	126	VERTEX	A010AA00/01/02/03/04/05/06	77
PRO ADAPT PRO TRAXION	E80004 P51A	174	VERTEX HI-VIZ	A010DA00/01	32/77
PROGRESS	L44A	90/120	VERTEX VENT	A010CA00/01/02/03/04/05/06	77
PROGRESS ADJUST-I NEW 202		3/90/91/134	VERTEX VENT HI-VIZ	A010EA00/01	77
PROGRESS ADJUST-Y NEW 202		3/18/90/120	VERTIGO TWIST-LOCK	M40A RLA	92/105
PROTEC	C45 N	141	VIZEN	A014AA00	78
PUR'ANNEAU	G006AA00/01/02	133	VIZEN MESH	A021AA00	78
		1	VIZIR	A015AA00	78
RACK	D11	116	VIZIR SHADOW	A015BA00	78
RAY 12 mm	R091AA00/01/02/03/04	98	VOLT / VOLT WIND NEW 2020	C72AA/CA/C72BA/DA	3/28/57
RESCUCENDER	B50A	122	VULCAN NEW 2020	M073	4/104
RESCUE	P50A / P50AN	126	W		
RIG	D021AA00/01	111	WILLIAM	M36A	103
RING	C04620 / C04630	63/133	Z	· '	
RING OPEN	P28	67/90/106/133	ZIGZAG / ZIGZAG PLUS	D022AA00 / D022BA00	115
ROLL MODULE	P49	141	ZILLON	L22A 025/040/055	91
	1	1			



www.petzl.com

The site for professionals working at height and in dark environments.

- Discover Petzl's solutions for verticality and lighting
- Check out tips and technical information on best practices for using Petzl products
- Find all the Petzl news and reports on various trades: videos, news, portraits, events...

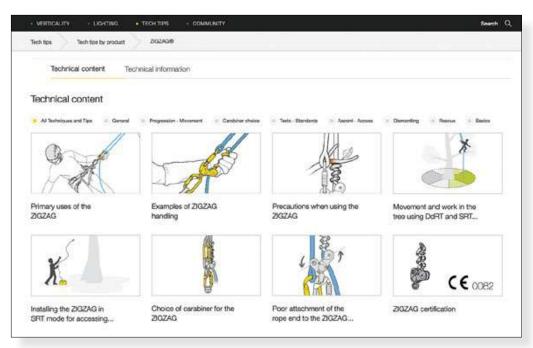

Pages to explore

Beyond our product offerings, Petzl offers a wide range of technical information: Instructions for Use, technical advice, PPE inspection records... Discover all the content pages on our website. Whether you are novice or expert in your field, Petzl shares our technical expertise to help you work more safely and efficiently.

All Petzl technical information is available on our product and professions pages. On our product pages, you will find:

- Instructions for Use: they are the base of our technical information and provide the essentials for using your products. Remember to read them before using your products
- Technical tips, "by Petzl". They contain information complementary to the Instructions for Use: test results, feedback, technical videos... Documents with all you need to know about your products!
- Records and procedures for PPE inspection: use them to inspect your PPE

Also find us at:











© Petzl 2019



Petzl headquarters: PETZL INTERNATIONAL. Z.I. Crolles, 38920 CROLLES, FRANCE

Graphic design: Pierre Bena design - www.pierrebenadesign.com

Product photos (non-contract photos): © Petzl

Kalice - www.kalice.fr

Aurélie Jeannette Photographe - www.aureliejeannette.com

Yannick Siegel

Printing: Printed in France by FOT.

Catalog printed on recycled paper, made up mostly of post-consumer waste. Using non-chlorine bleach, its production respects the environment by reducing energy consumption, as well as air and water pollution.

The activities depicted are inherently dangerous. All users must be trained and competent in the use of the equipment for these activities.

Access the inaccessible®



To find a Petzl retailer near you or anywhere in the world go to:

www.petzl.com/dealers

↑ Maintenance operations of wind turbines, France © 2019 - Petzl Distribution - Vuedici.org - RES - Parc éolien de Marsanne

↓ Excavating underground galleries
 © 2019 - Petzl Distribution - Rémi Flament - SAS Michel Besson

Z013DA03

ENGLISH

PETZL.COM